DENSE GRAPHIC & HALF-TONE DITHERING STRESS TEST

Floyd-Steinberg Error Diffusion & JBIG Compression Ratio Benchmark

Quadrant A: 1-Pixel Checkerboard (Max Spatial Freq) **Quadrant B: Siemens Radial Frequency Sweep**

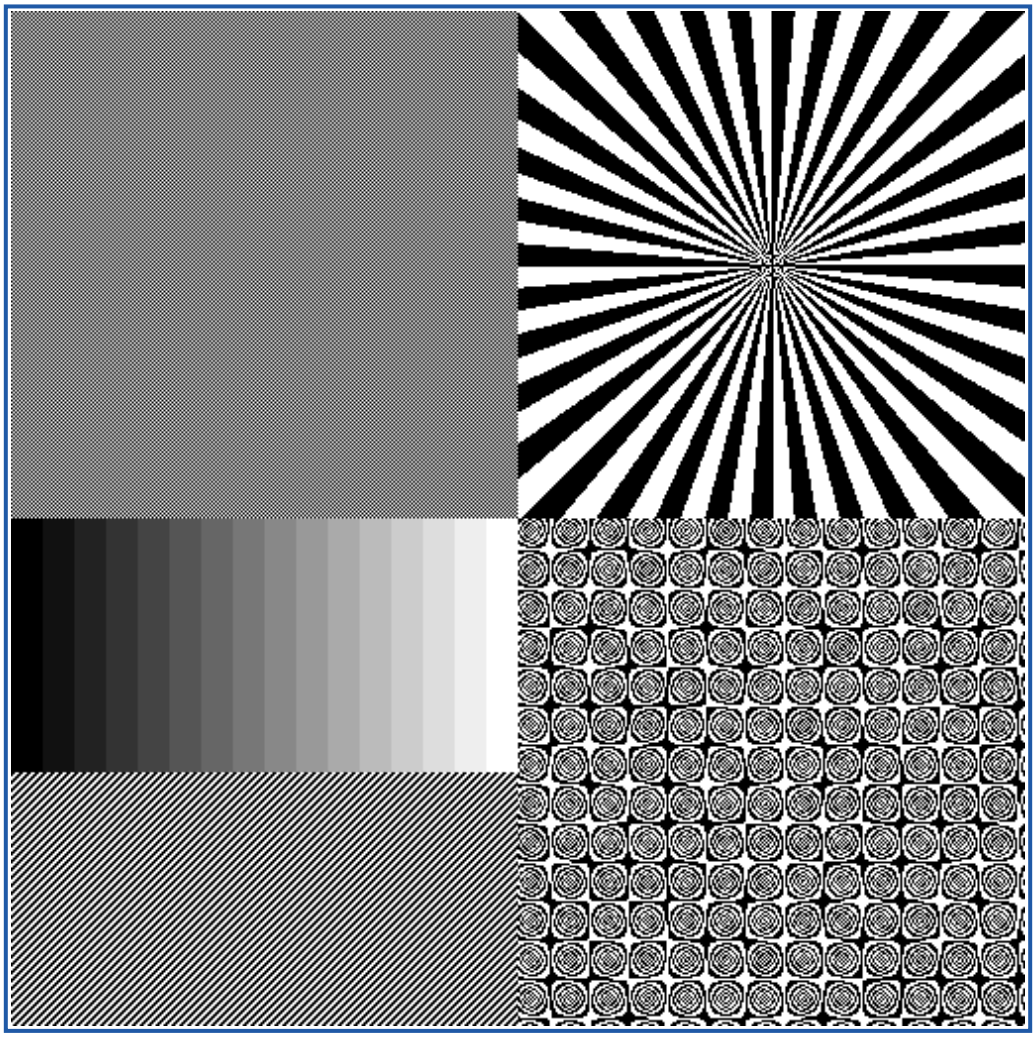

Quadrant C: 16-Step Gray Tonal Ramp & 45° Grating **Quadrant D: High-Entropy Pseudo-Random Noise**

VECTOR RESOLUTION LADDER (0.1 pt to 2.0 pt line thickness):

0.1pt	0.25pt	0.5pt	0.75pt	1pt	1.5pt	2pt

MICRO-TEXT LEGIBILITY LADDER:

The quick brown fox jumps over 1234567890 [3pt]

The quick brown fox jumps over 1234567890 [4pt]

The quick brown fox jumps over 1234567890 [5pt]

The quick brown fox jumps over 1234567890 [6pt]

The quick brown fox jumps over 1234567890 [7pt]

The quick brown fox jumps over 1234567890 [8pt]

The quick brown fox jumps over 1234567890 [9pt]

The quick brown fox jumps over 1234567890 [10pt]

Benchmark Target: Measure dithering throughput (Mpixels/sec) and JBIG compression ratio on high-entropy pixels.