

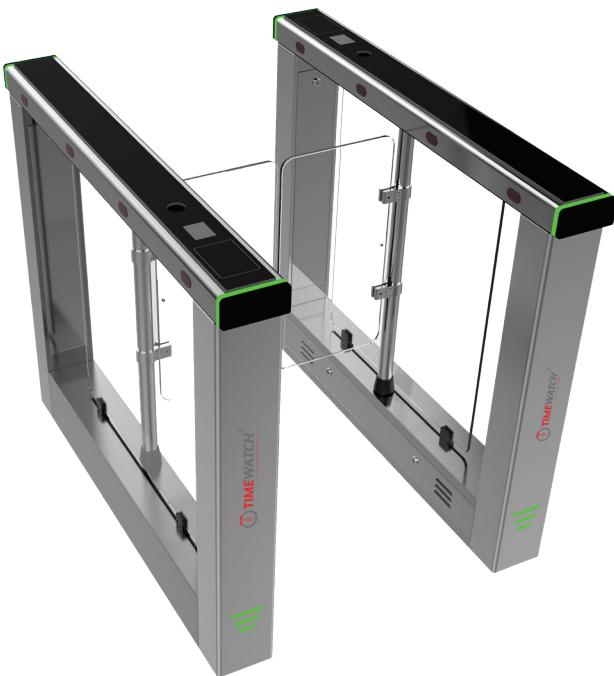

 6 Million  
Movement Life

 4 Pairs  
Infra Red

 Illegal Intrusion  
Infrared Alarm

 DC Brushless Motors  
Fully Automatic Clutch

 Auto Self Inspection  
& Alarm Prompt

 Negligible  
Maintenance


## Full Automatic Swing Gate

### TWLD-SG2600/TWLD-SG2602

TWLD-SG2600/TWLD-SG2602 is a fully automatic swing gate barrier that is driven by a 24V brush less DC motor, which supports multiple opening modes like ID & IC Card swiping, other reading head verification opening, infrared induction automatic opening, button opening, etc. The device has accurate identification techniques with protection and safety functions like electromechanical anti-collision, infrared anti-pinch and illegal intrusion infrared alarm. The device ensures rapid, efficient, and safe access control and very convenient and easy-to-use features.

- The movement has obtained the national utility model patent and the driving system is soft
- The mechanical part adopts the CNC process, and the connector adopts a high-temperature quenching process, which will not deform after long-term operation
- It has the function of fault self-inspection and alarm prompt, with its inbuilt voice prompt function, which is convenient for users to maintain and use
- Infrared alarm for illegal intrusion


 (+91)-11-41916615  
 +91-95999-53923

 D-162, Okhla Industrial Area  
 Phase I, New Delhi, 110020

 sales@timewatchindia.com  
 www.timewatchindia.com

- It has an automatic reset function. After opening the gate, if there is no passage within the specified time, the system will automatically cancel the user's permission to pass this time. The standard is automatic reset 3 seconds after opening
- Audible and visual alarm function: including illegal intrusion, trailing alarm, and closing the gate;
- Domestic high-quality brand infrared, high light resistance: the ultimate light resistance intensity is 100000 lux, and the light resistance angle is 6
- Only one person can pass with one card, anti-tag after, and anti-hit against the feature.

## Specifications

Dimension	1200mm*140*1000mm
Material Structure	High quality stainless steel, tempered glass, acrylic;
Channel Width	600-850mm (<570mm Can be customized)
Outer Box	1.0mm+1.2mm
Motor	24V brushless DC motor, low noise
Control Panel	Integrated brushless control system
Traffic Direction	One-way/two-way traffic
Running speed	0.5~0.8s
Opening mode	Biometric identification, IDIC, remote control switch, etc
Opening signal	Dry contact signal, can be customized RS232 mode
Lifetime	≥6 million times
Infrared quantity	4 pairs
Power	40-60w
Applicable temperature	-20°C~70 °C
Support	Indoor and outdoor use



 **Head Office :** D-162, Okhla Industrial Area Phase I,  
New Delhi, 110020.  
 **Regional Office :** Mumbai, Bengaluru, Ahmedabad,  
Chennai, Kolkata.  
**International Office :** Dubai

**Disclaimer :** All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.

 **Phone :** +91-95999-53923  
 **Sales :** sales@timewatchindia.com  
 **Support :** helpdesk@timewatchindia.com