



## Access Control Accessories

### EM Lock Single Leaf (Feedback)

- Collinear Load Test 1200 Pounds.
- High Strength Material.
- MOV Reverse Current Protection.
- Anodized Aluminium Housing.
- LED Indicates the Power Status.
- Anti-Residual Magnesium Designed.

### Specification


Verification	
Holding Force	560KG / 1200Lbs (Double Leaf)
Dimension	500mm*48mm*27mm (Double Leaf)
Armature Plate	180mm(L)*38mm(W)*11mm(H)
Voltage	12/24/48VDC+10%
Current	0.48A/0.24A
Operating Temperature	-20°C ~ 60°C
Working Mode	Power off to open (NC)



Finishes for Shell	Anodized Aluminium
Finishes for Magnetic	Zinc
Finishes for Armature	Zinc

## Dimensional Drawing

### LZ-bracket for inswing doors

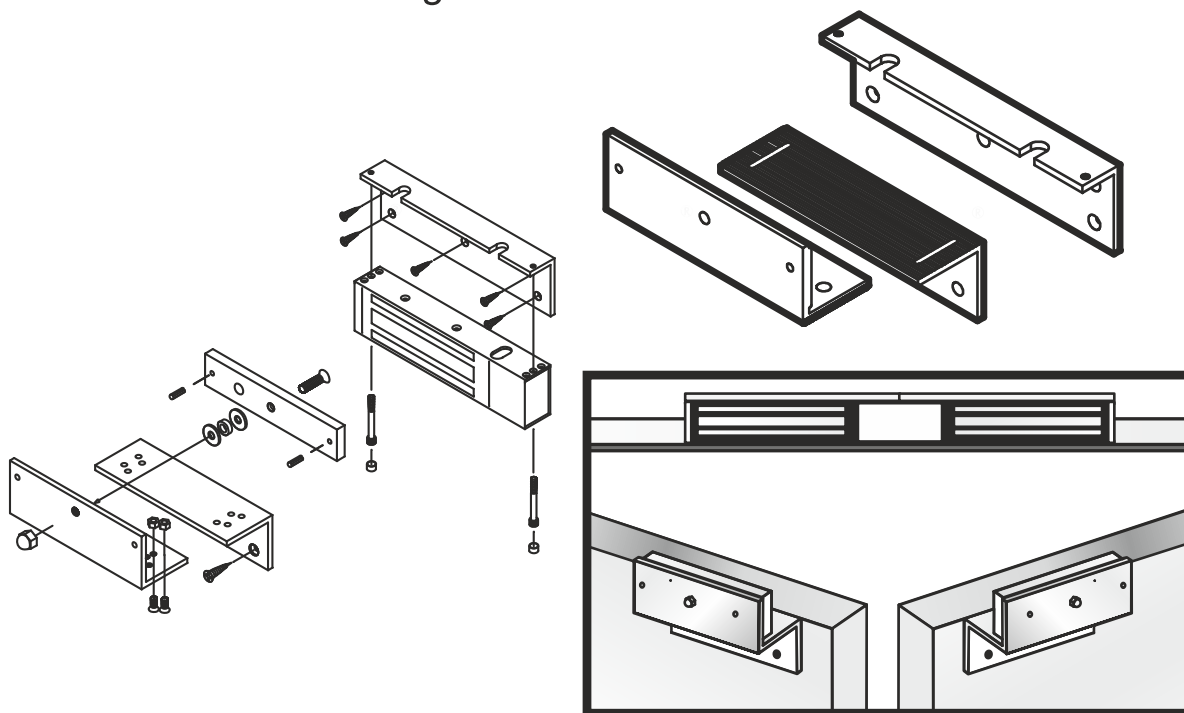

**Head Office :** D-162, Okhla Industrial Area Phase I,  
New Delhi, 110020.



**Regional Office :** Mumbai, Bengaluru, Ahmedabad,  
Chennai, Kolkata.

**International Office :** Dubai

**Disclaimer :** All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.



**Phone :** +91-95999-53923



**Sales :** sales@timewatchindia.com



**Support :** helpdesk@timewatchindia.com