

### Verification & Features



Rebound Function  
in Resistance




1.8s Quick  
Lifting Speed




Long Remote  
Control Range



Negligible  
Maintenance



24V DC  
Brushless Motor

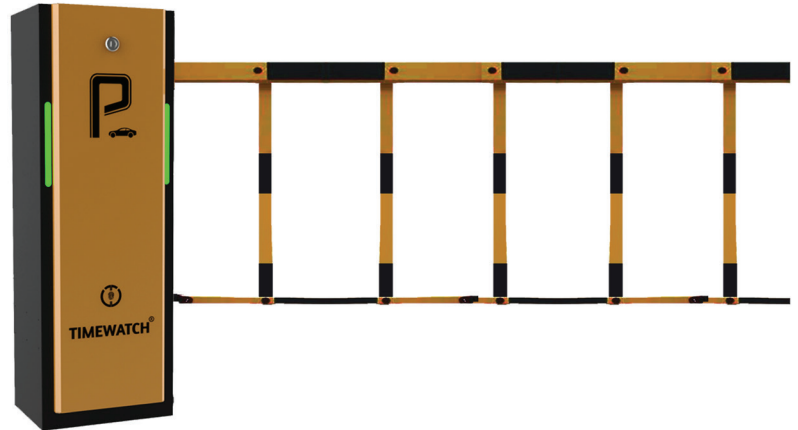

## Fencing Barrier

### TW-PB4060FS

- The gate movement adopts a crank shaker drive mechanism which has a compact structure, enhanced rigidity, and convenient maintenance and operation.
- When the gate rod is in the horizontal or vertical state, the movement structure is completely self-lock, which can effectively protect the reducer from external force impact.
- Compared with ordinary gate movement, the parts are reduced by about 20% and the faults are less.



(+91)-11-41916615  
+91 9609749609



D-162, Okhla Industrial Area Phase I,  
New Delhi, 110020



sales@timewatchindia.com  
www.TimeWatchindia.com

## Specifications

Appearance Dimension	340mm * 272mm * 1020mm
Power Supply	220V ± 10% 50 ~ 60Hz
Voltage	AC110V/220V
Motor	24v150w brushless 2-stage variable speed all copper DC motor
Remote Control Distance	≤ 30m
Waterproof Grade	IP45
Working Environment	-15°C ~ +70°C
Box Thickness	Full-thickness 1.5mm
Boom Length	Straight Arm - 6m, Fencing Arm / Folding Arm - 4.5m
Operating Speed	1.2s - 6s adjustable (the specific operating speed is adjusted according to the rod type and rod length)
Motor Capacity	24V DC Brushless Motor



**Head Office :** D-162, Okhla Industrial Area Phase I, New Delhi, 110020.



**Regional Office :** Mumbai, Bengaluru, Ahmedabad, Chennai, Kolkata.

**International Office :** Dubai



**Phone :** +91-95999-53923



**Sales :** sales@timewatchindia.com



**Support :** helpdesk@timewatchindia.com

**Disclaimer :** All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.