

Customer Information Sheet

DRAWING No.: S70-332002045R


IF IN DOUBT - ASK

©





NOT TO SCALE

THIRD ANGLE PROJECTION




ALL DIMENSIONS IN mm

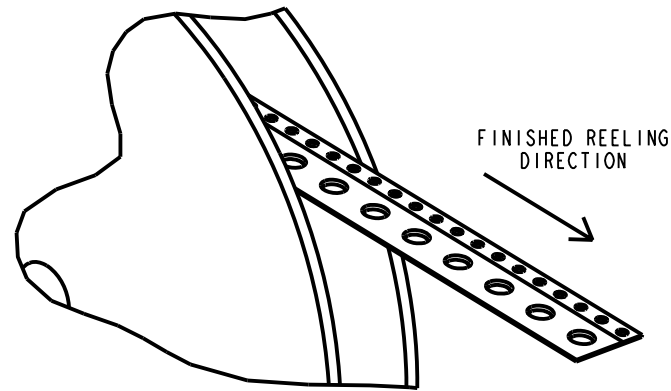

COMPONENT DETAILS

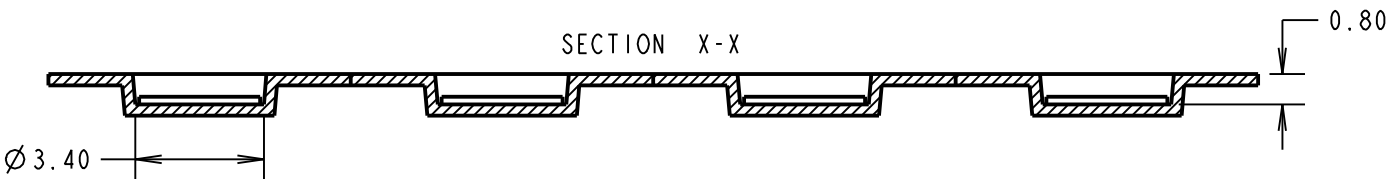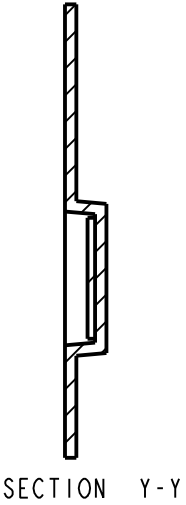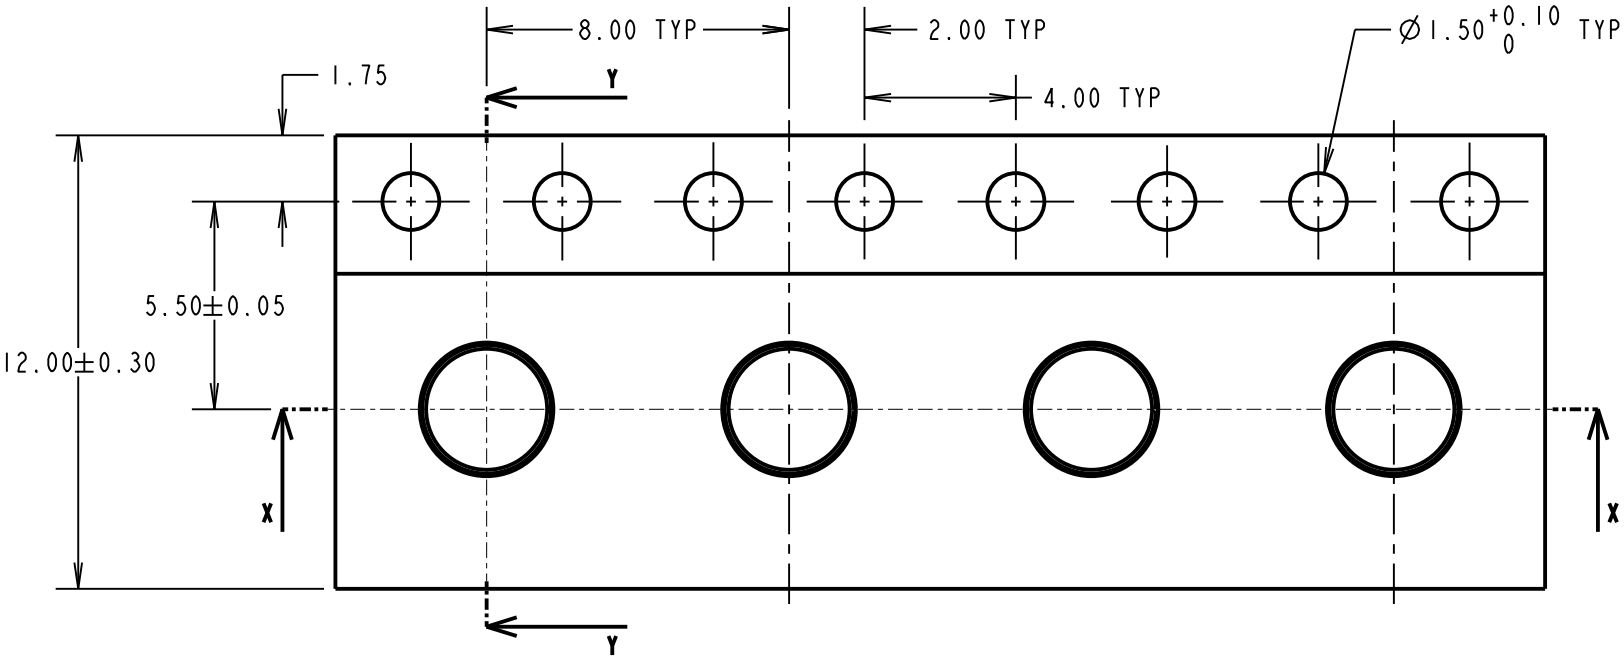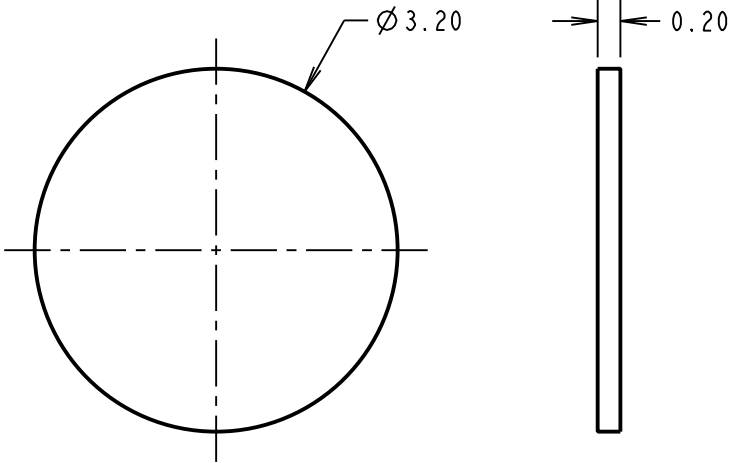

REEL DETAILS

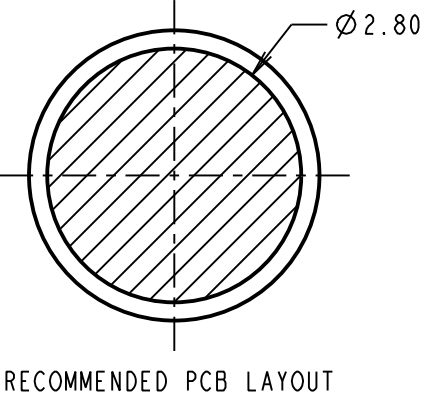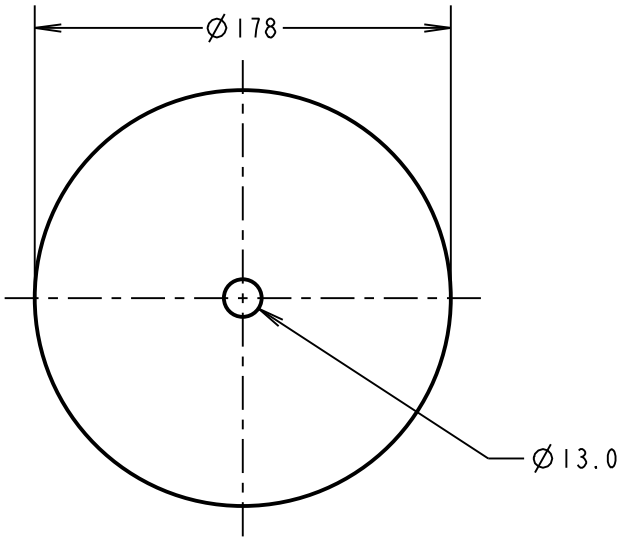

SPECIFICATIONS:  
FINISH:  
0.025µ - 0.075µ GOLD OVER 1.5µ - 3.0µ NICKEL  
ELECTRICAL:  
CURRENT RATING = 6.0A  
CONTACT RESISTANCE = 0.15mΩ MAX  
ENVIRONMENTAL:  
OPERATING TEMPERATURE = -40°C TO +85°C  
PACKING:  
QUANTITY: 2000 PER REEL  
NOTES:  
1. QUANTITY OF COMPONENTS PER REEL = 2000.  
2. PRODUCT IS TAPE AND REELED IN GENERAL ACCORDANCE WITH EIA-481.

MSP	3	21.08.17	20727
NAME	ISS.	DATE	C/NOTE
APPROVED:		M.PERREN	
CHECKED:		M.PLESTED	
DRAWN:		M.PERREN	
CUSTOMER REF.:			
ASSEMBLY DRG:			

**HARWIN**

www.harwin.com  
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES  
X. = ±1mm  
X.X = ±0.50mm  
X.XX = ±0.10mm  
X.XXX = ±0.01mm  
ANGLES = ±5°  
UNLESS STATED

MATERIAL:  
BERYLLIUM COPPER  
FINISH: SEE ABOVE  
S/AREA: 18.1 mm²

TITLE:  
SMT CIRCULAR CONTACT PAD  
DRAWING NUMBER:  
S70-332002045R  
SHT 2 OF 2