Oscivox Classical Guitar Tuner

Operating Manual

Content

1. ***Introduction***
2. ***Safety Information***
3. ***Product Overview***
4. ***What's in the box***
5. ***Operating Instructions***
6. ***Warranty Information***
7. ***Technical Support and Warranty Claims***

Introduction

Thank you for choosing the Oscivox Guitar Tuner. This product has been carefully designed to assist you in accurately tuning your classical guitar. Ensuring precise pitch detection and minimal deviation from standard tuning. Oscivox helps you achieve clear, balanced, and harmonically correct sound for optimal playing and practice.

Safety Information

- Do not leave the device powered on for a long time, as this may damage the internal components.
- Do not expose the device to moisture, rain, liquids, or direct heat sources.
- Use only a 9 V dry cell battery with a maximum current rating of 300 mA.
- Do not open or attempt to modify the device enclosure.
- Avoid damaging or obstructing the built-in microphone, as this may affect tuning accuracy.

Product Overview

Top Panel

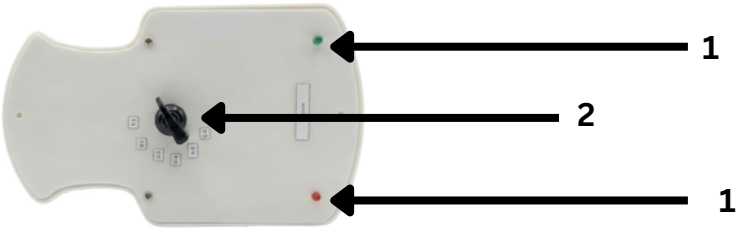

1. **Indicator LEDs**
2. **Note Selection Switch**

Side Panel-1

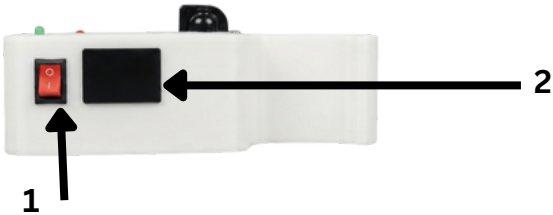

1. **Power ON/OFF Switch**
2. **Battery Chamber Opening**

Product Overview

Side Panel-1

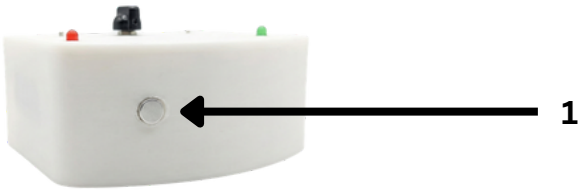

1. **Microphone**

What’s in the box

Box Content

- **Oscivox Guitar tuner unit**
- **9V rechargeable batter**
- **User Manual**

Operating Instructions

1. Switch on the Oscivox Guitar Tuner. The green LED will illuminate to indicate that the device is powered on.
2. Allow the device to warm up for 30 to 60 seconds for stable operation.
3. Select the desired note using the rotary switch located on the top panel.
4. Position the Oscivox Guitar Tuner so that the microphone on Side Panel 2 is close to the guitar.
5. Pluck the string to be tuned and observe the indicator LEDs to assess the tuning status.

You will observe

- Green LED turned on - String is lower than the expected frequency
- Red LED turned on - String is higher than the expected frequency
- Both Red and Green LEDs are turned on - Guitar string is perfectly tuned to the expected frequency

Warranty Information

1 Year Limited Warranty

Covers

- **Electrical failures not caused by misuse are covered under warranty.**
- **Manufacturing Defects**

NOT Covers

- **Water damage**
- **Physical Damage**

This warranty shall be void if the seal on the enclosure is tampered with or broken.

Technical Support and Warranty Claims

For technical support, replacements, or warranty-related inquiries, please contact:

Oscivox Engineering

Email: support@oscivox.com

Phone: +94 74 363 3248

Location: Sri Lanka

OSCIVOX

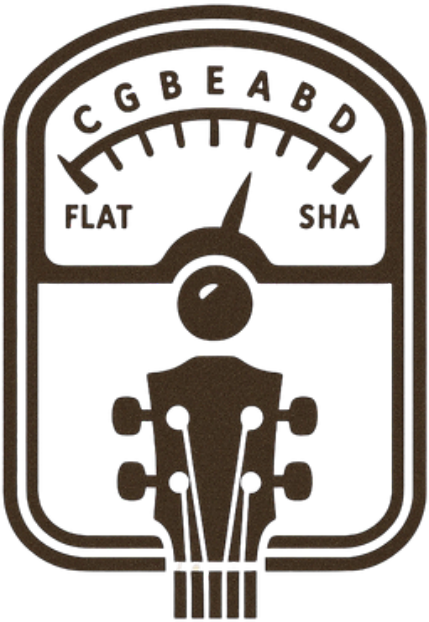

OSCIVOX

ANALOG GUITAR TUNER