


General Information

DigiSonde® is an upper air telemetry instrument carried into the atmosphere by a weather balloon that measures various atmospheric parameters and transmits them by radio to a ground station. It can measure or calculate the following variables: pressure, temperature, relative humidity and wind speed and direction from earth surface up to upper air layers.

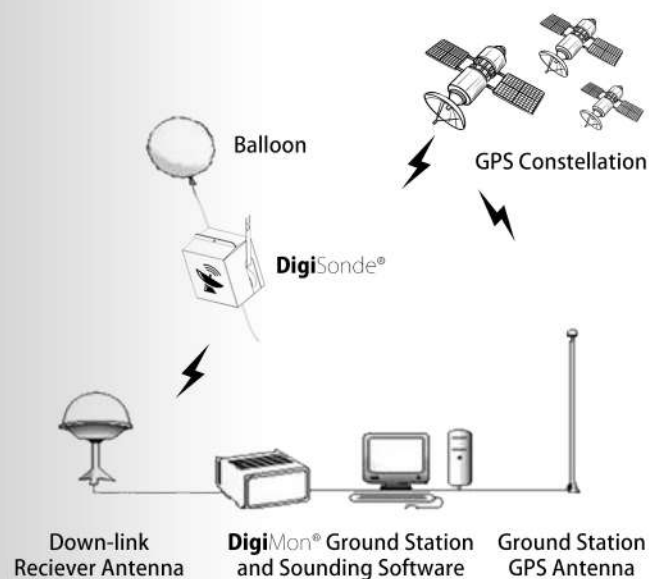

Specifications

PTU measurement

	Press.	Temp.	RH
Measurement range	1050 ~3 mbar	-90 ~ 60 °C	1 ~99%
Resolution	0.1 mbar	0.1 °C	0.1 %
Accuracy	± 1 mbar	±0.5 °C	± 3%
Response time	<0.1s	<0.5s	<2s
Measurement rate	1 Hz	1 Hz	1 Hz
Factory calibration	Stored in EEPROM		

Wind measurement

Calculation approach	C/A coded GPS
Position resolution	0.1 m
Wind speed resolution	0.1 m/s
Wind direction resolution	0.1 °
Position Accuracy	5 m
Wind speed accuracy	0.2 m/s
Wind direction accuracy	1 °
Measurement rate	1 Hz

Transmitter

Frequency range	400 ~ 406 MHz
Frequency step	10 KHz
Output power	100 mW
Modulation type	Digital FSK 1200 bauds

General

Dimensions	75 x 90 x 110 mm
Weight	200 gr (including batteries)
Battery pack	3 x 1.5 V - 1300 mAh

