

GENERAL

ALIAMAG The ALIAMAG AMC2200 Series converter is a microprocessor based intelligent transmitter that can be paired with any of the Alia AMF series sensors. The unit features multiple display parameters including flow rate, flow total, diagnostics, programming and troubleshooting. It's equipped with Bluetooth, HART and MODBUS communication functions.

FEATURES


- ❑ Three-line OLED display Flow Rate / Totalizer
- ❑ Accuracy of +/-0.35% value of reading
- ❑ Bi-directional flow measurement, current and pulse output
- ❑ Large digital display
- ❑ Bluetooth / MODBUS / HART communication

STANDARD SPECIFICATION


- | | | | |
|-------------------|--|-----------------------|--|
| ● Excitation | : DC pulsed | ● Keypad | : 4 Internal keys for programming and display control |
| ● Display | : 3 Lines OLED | ● Data Storage | : Operation parameters and totalizer figures are stored by EEPROM for more than 10 years |
| Line 1 | : Empty pipe symbol / Alarm / Batch control symbol | | |
| | : Percentage progress bar / Message / Clr tot | | |
| Line 2 | : 11 Digit flowrate / velocity / % / mA / Hz / Tot | | |
| Line 3 | : 9 Digit totalizer for forward flow | ● Low Flow Cutoff | : 0-9.9% |
| | : 9 Digit totalizer for reverse flow | ● Damping | : 0-99 Seconds |
| | : 9 Digit totalizer for difference | ● Density Setting | : 0.0001-9999.9 kg/m ³ |
| | : 11 Digit flowrate | ● Self Diagnosis | : The following error messages are displayed if failure occurs |
| Totalizer Unit | : m ³ , L, mL, gal, lgal, Mgal, ft ³ , bbl, a-ft | | |
| | : kg, g, lb, t, Ston, Lton | | |
| Time Unit | : sec, min, hour, day | | |
| ● Measuring Range | : Min. 0-0.15 m/s | ● Cable Entry | : Standard: M20 Option: 1/2" NPTF |
| | : Max. 0-15 m/s | ● Protection Class | : IP65 |
| ● Accuracy | : +/-0.35% of reading (Velocity ≥ 0.5 m/s) | ● Ambient Temperature | : -40~70 °C |
| | : +/-0.00175 m/s (Velocity < 0.5 m/s) | ● Material | : Aluminum Alloy |
| ● Repeatability | : +/-0.07% of reading | ● Power Supply | : 90-260 VAC, 50/60 Hz |
| ● Current Output | : 4-20 mA (Isolated) | | : 24 VDC +/-10% (Option) |
| | Load : Max. 600 Ω | ● Power Consumption | : 3-17 W (Dependent on sensor size) |
| ● Pulse Output | : Open collector | ● Lightning Protector | : Module design, easy to replace |
| | Rating : 3-30 VDC, 50 mA Max. | | : Surge test voltage up to 4 kV |
| ● Pulse Rate | : 1) Scaled pulse (mL/Pulse, L/Pulse, Other) | ● Weight | : 1.4 kg |
| | : 2) Frequency: 0-5000 Hz | ● Mounting | : Wall mounting |
| ● Pulse Width | : 50% of band width | | |
| ● Alarm | : High / Low with open collector output | | |
| | Rating : 3-30 VDC, 50 mA Max. | | |
| ● Communication | : Bluetooth (Android) Standard | | |
| | : RS485 (MODBUS Protocol) Standard | | |
| | : HART signal (Compatible) Optional | | |




DIMENSIONS

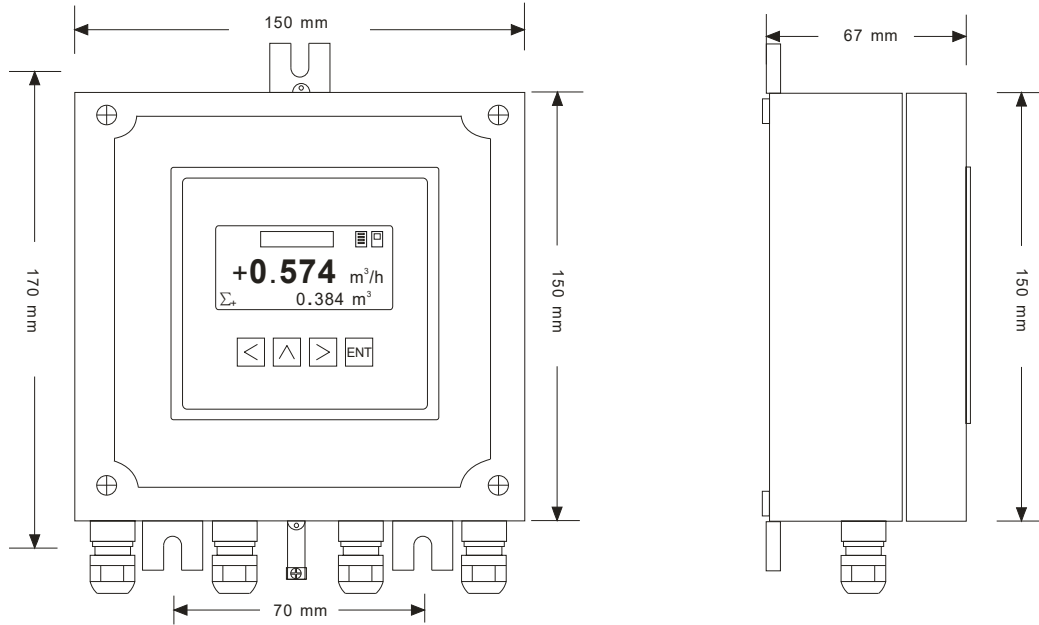


WIRING DIAGRAM

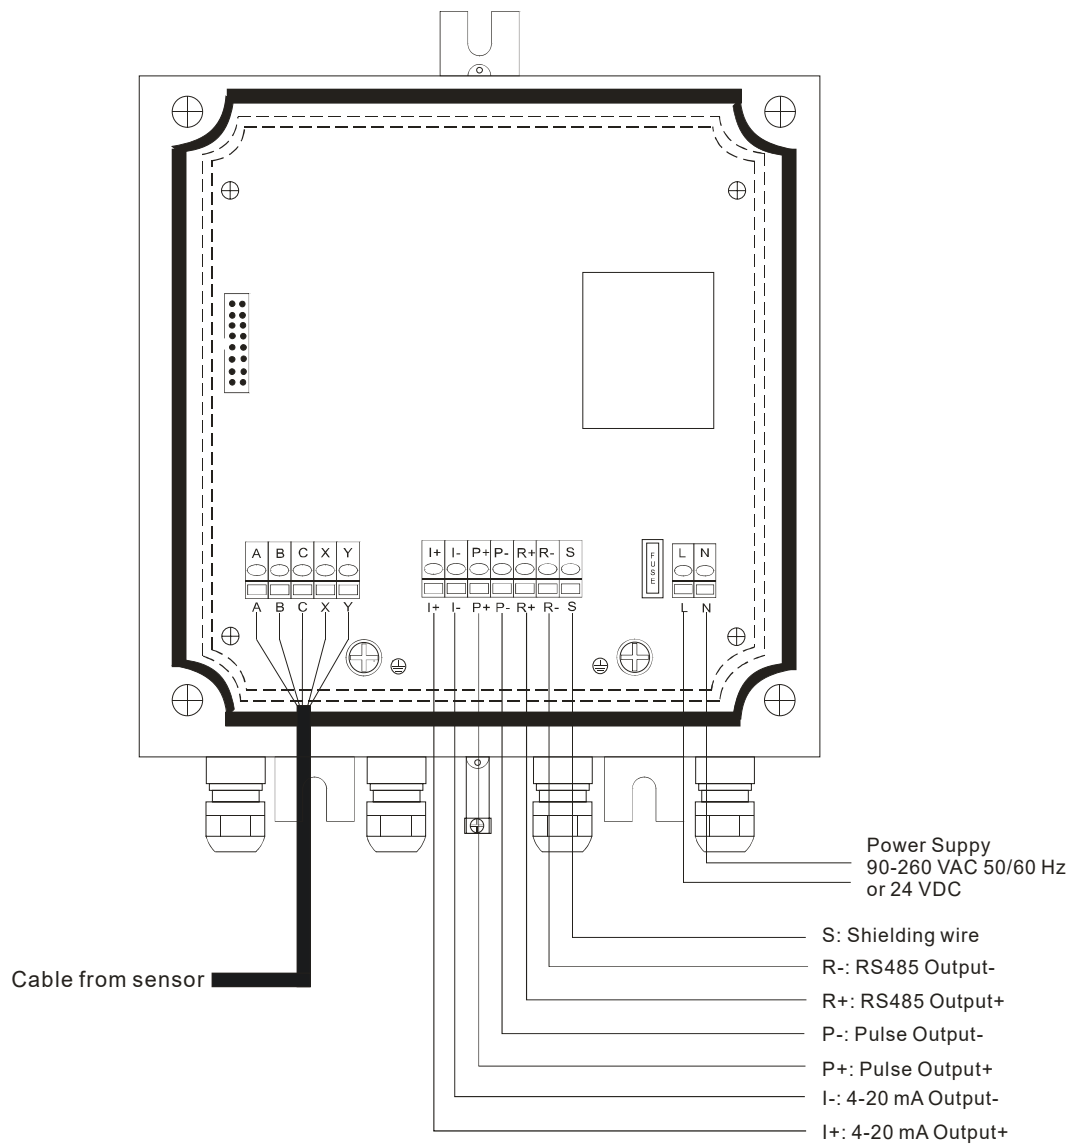

➤ ACCURACY

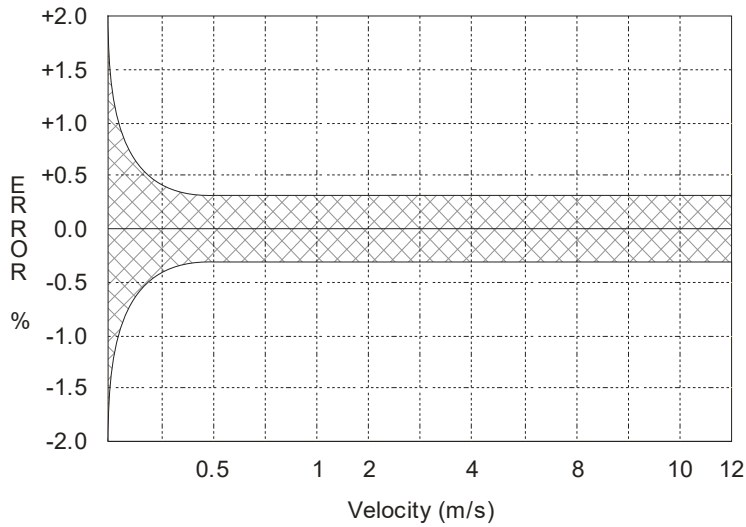

➤ CABLE LENGTH BETWEEN SENSOR & CONVERTER

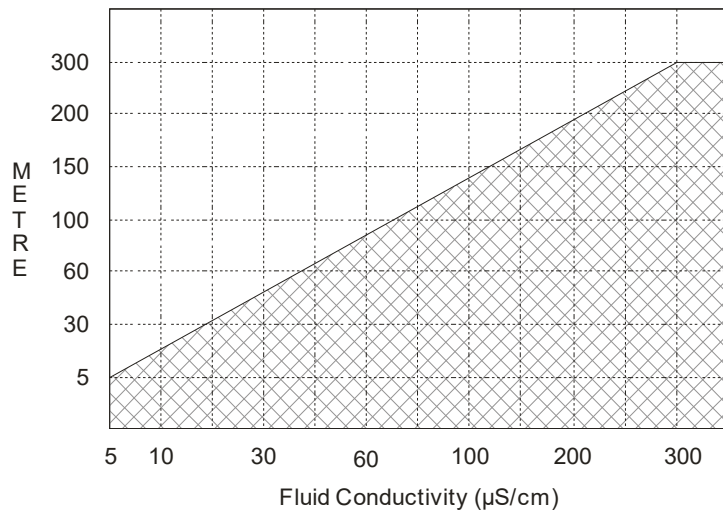

➤ MODEL SELECTION GUIDE

AMC2200 Series					
Example: AMC2200-AC-CP-HT-PT					
AMC2200-	XX-	XX-	XX-	XX	Description
Power Supply	AC-				90-260 VAC, 50/60 Hz
	DC-				24 VDC, +/-10%
Mounting		CP-			Compact with Sensor (Max. Operating Temperature: 80 °C)
		CH-			Compact with Sensor (Max. Operating Temperature: 120 °C)
		SW-			Remote, Wall Mounting
Communication		NN-			RS485 (MODBUS Protocol) and Bluetooth
		HT-			HART Signal (Compatible)
Option			NN		None
			PT		Cable Entry 1/2" NPTF
			LP		Lightning Protector (Internal) (With AC Power and RS485 Only) * Note

Note: Surge test voltage up to 4 kV.

BUILD OPTIONS- (COMPACT OR REMOTE)

