



DIFFERENTIAL PRESSURE TRANSMITTER



FEATURE

- Updating time of output current in 200 ms
- Improved performance, increased accuracy, greater stability
- Two Years stability of 0.2%
- 0.075% accuracy
- Parameter setting by the use of local keypad
- 4-20 mA output plus direct digital HART communication
- Automatic zero calibration by press button
- Explosion proof and weather proof housing



KDP SERIES

For more information

www.flowmeters.co.kr

www.kmeter.co.kr



산업용 유량계 전문기업
(주)엠엔씨 엔지니어링
M&C Engineering Inc.

인천광역시 부평구 안남로 425-10(청천동) (주)엠엔씨 엔지니어링
TEL : 82-32-512-6230 FAX : 82-32-513-6230
E-MAIL : info@flowmeters.co.kr, <http://www.flowmeters.co.kr>




KDP600 (Differential Pressure Transmitter)


SPECIFICATION

Process Fluid	: Liquid, Gas or Vapor
Application	: Differential Pressure, Gauge Pressure, Absolute Pressure
Measuring Range	: 0 - 0.06 Kpa ~ 0 - 1.5 Kpa (Minimum) 0 - 7000 kpa ~ 0 - 40000 kpa (Maximum)
Turn Down Ratio	: 1 : 100
Accuracy	: +/- 0.075% of span
Stability	: +/-0.15% of URL for 2 years
Working Temperature	: -25 to +95 °C
Max. Pressure	: 40000 kpa
Enclosure	: IP67 (Standard)
Display	: 5 Digits programmable & 0-100% Bargraph
Display Unit	: Standard 22 engineering unit 5 Digits programmable for special unit
Keyboard	: 3 keys from internal for Programming and output setting
Current Output	: 4 - 20 mA 2 wires with Hart Signal
Load	: $R_{ohm} = (V_{dc} - 9) * 50$
Power Supply	: 9 ~ 36 VDC
Damping Adjustment	: 0 - 32 Seconds
Response Time	: 200 mS
Mounting	: Bracket on 2" Pipe
Humidity Limits	: 0 to 100% Relative Humidity
Turn on Time	: 2 Seconds with minimum damping
Zero calibration	: Automatic zero calibration by push button
Electrical Connections	: M20 Conduit Threads / 1/2" NPT(Female)
Temperature Effect	: +/-0.18% of span per 20 °C
Vibration Effect	: +/-0.05% of URL per g to 200 Hz in any axis
EMI/RFI Effect	: Follow SAMA PMC 33.1 from 20 to 1000 MHz and for field strengths up to 30 V/m
Ambient Temperature	: -25 to +85 °C
Dimensions	: 152 mm (W) * 192 mm (H) * 108 mm (D)
Weight	: 3.5 Kg


WIRING DIAGRAM

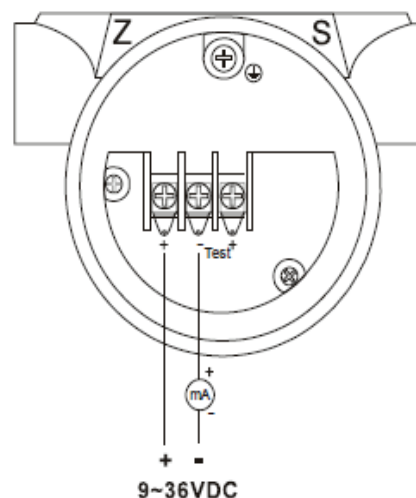

SUPPLY VOLTAGE VS LOOP LOAD

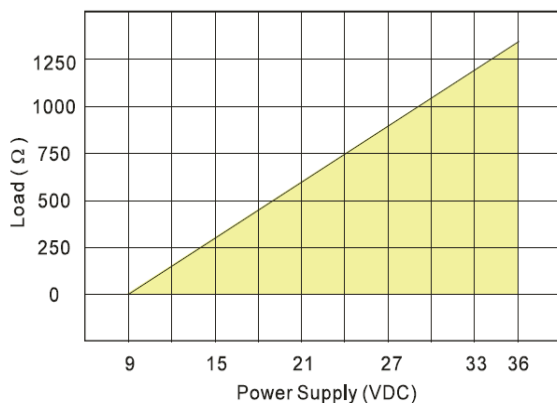

DIMENSIONS

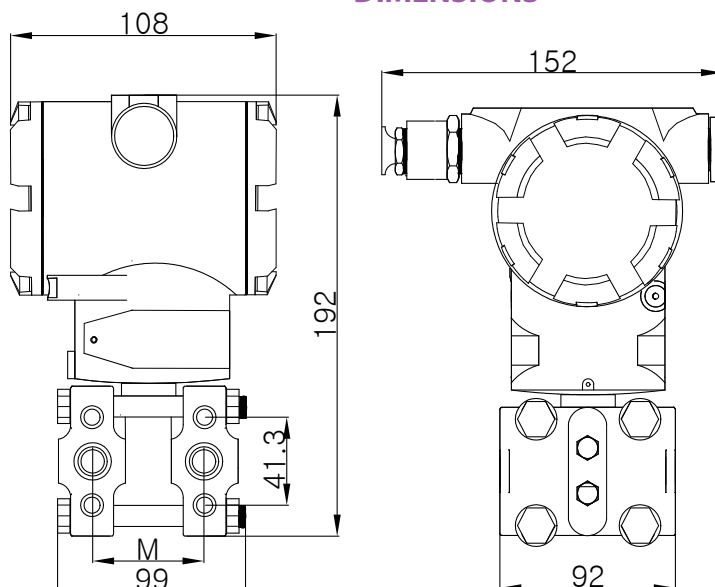

KDP600 (Differential Pressure Transmitter)

MODEL SELECTION GUIDE

KDP600

Example: KDP600-D3-CNS-6NN

KDP600-	X	X	-X	X	X	-X	X	X		Description
Type	D									Differential pressure transmitter
	G									Gauge pressure transmitter
	A									Absolute pressure transmitter
Pressure Range	0									0-0.06 ~ 0.3kPa
	1									0-0.25 ~ 1.5kPa
	2									0-1.2 ~ 10kPa
	3									0-6 ~ 40kPa
	4									0-30 ~ 180kPa
	5									0-160 ~ 1000kPa
	6									0-400 ~ 2500kPa
	7									0-1600 ~ 8000kPa
	8									0-4000 ~ 25000kPa
	9									0-7000 ~ 40000kPa
Diaphragm Material	-N									Stainless Steel 316L
	-B									Hastelloy B
	-C									Hastelloy C
	-P									Monel
	-T									Tantalum
Process Flanges, Drain/Vent valve Material	N									Stainless Steel 304
	S									Stainless Steel 316
Bolts / Nuts Material	N									Carbon Steel
	S									Stainless Steel 316
Mounting Bracket Material	-N									Carbon Steel
	-4									Stainless Steel 304
	-6									Stainless Steel 316
Wetted O-ring Material	N									Burn-N
	V									Viton
	P									PTFE
Process Connections	-N									1/4" - 18 NPT
	-A									1/2" - 14 NPT(with Adapter)
	-Z									Other