


ELECTROMAGNETIC WATER METER

전자기 수도계량기

KM-200W

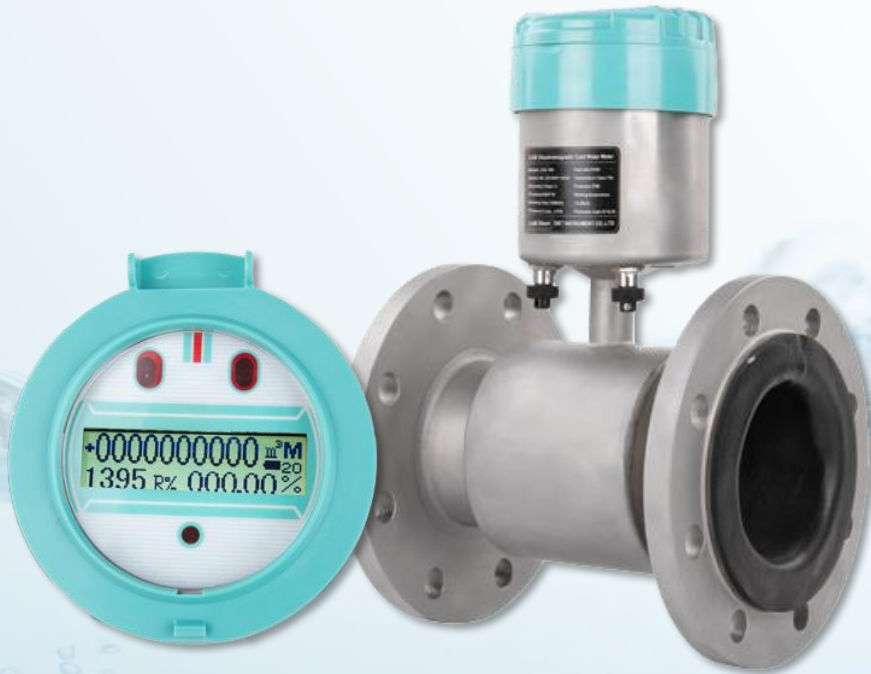

INNOBIZ

For more information www.flowmeters.co.kr / www.kmeter.co.kr

ELECTROMAGNETIC WATER METER

전자기 수도계량기

KM-200W
S E R I E S

K-METER

액체 유량 측정용



특징 FEATURE

- 실시간 유량 및 누적된 적산 유량 측정
- 대부분의 산업 응용 분야에 적용 가능
- 비전도성 액체를 제외한 거의 모든 액체에 적용
- 다양한 Connection 제공
- 지시부 일체형
- 구동부가 없어 압력 손실이 없음



수도 공급



관개 시설



폐수처리



제약산업



석유 산업



급수 및 배수

적용 산업 APPLICATIONS

- 도시 물 공급
- 하수, 오수 상하수도 관련 플랜트
- 식음료 공정
- 제지산업
- 제약산업
- 석유 및 가스
- 발전 및 에너지산업
- 농업 및 관개 시스템

전자기 수도계량기 KM-200W 시리즈	
구 분	사 양 정 보
크기 (Measuring Pipe Size)	DN 40 – DN 300 / 1½" - 12"
유속 (Starting Flow Velocity)	5 m/s
유량비 (Flow ratio)	R160 std, R250 / R400 (optional)
정확성 (Accuracy)	Class 2 standard, Class 1 optional
전도도 (Conductivity)	> 20 µS/cm
구조 (Structure)	Compact / remote, cable length 10m standard, 20m max
측정모드 (Measurement Mode)	Flow, flow + pressure, flow + temperature
온도 (Temperature)	Ambient temperature: -10°C~+75°C Fluid temperature : T50 Storage temperature: -40~70°C
재질 (Material)	Sensor: flange & housing: carbon steel (standard), SS304 / SS316 optional Transmitter: SS304 Electrodes: SS316L, Hastelloy C Liner: Hard Rubber, PTFE
신호 출력 (Signal Output)	RS485 Modbu, GPRS, NB-IOT
화면 표기 (Display)	Instantaneous flow, total flow, velocity flow (Display Unit : L/s, L/m, L/h, m/s, m/m, m/h, UKG, USG gal/s gal/m gal/h kg/s kg/m kg/h t/s t/m t/h)
전원 사양 (Power supply)	3.6V lithium battery 3.6V lithium battery + 24 VDC power supply (12~ 24 VDC) 3.6V lithium battery + 220 VDC power supply (85 ~ 250 VDC) (only for remote)
직선 배관 (Straight Pipe)	U5+D3 for R160 and R250, U0+D0 for R400
흐름 방향 (Flow direction)	Forward, reverse
보호등급 (Protection class)	IP68



Battery



Battery with
R400 (U0+D0)




Battery + Pressure



Battery with wireless
(GPRS / NB-IoT)


제품 치수 DIMENSION

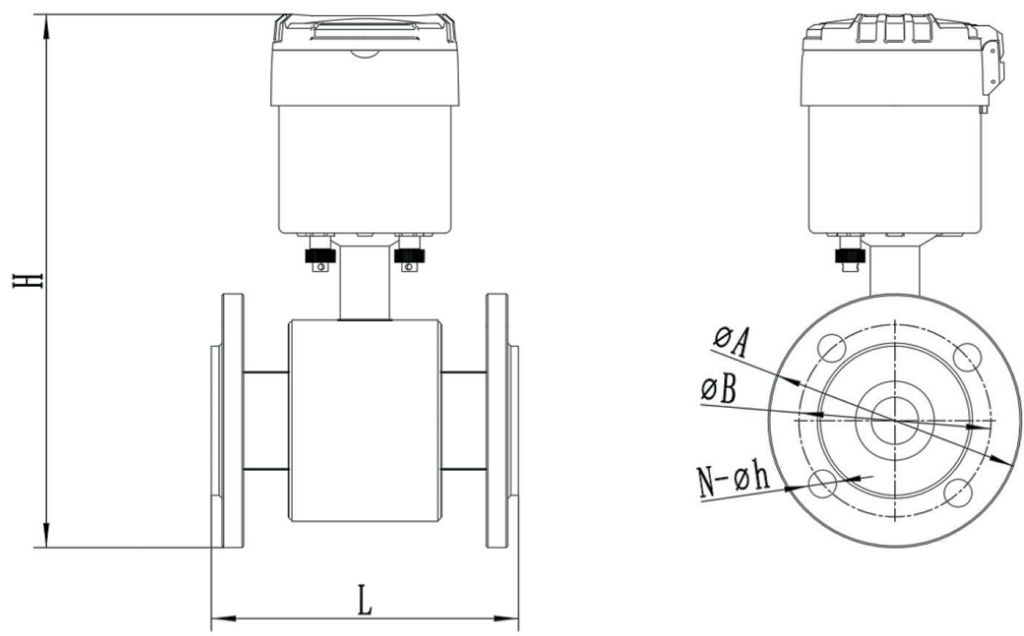

Battery with DIN PN16 flange Drawing (Unit: mm)

Nominal Size		Flange Standard	Nominal Pressure	H	L	φA	φB	N	φh
mm	Inch								
DN40	1½"	DIN	1.6MPa	329	200	150	110	4	18
DN50	2"	DIN	1.6MPa	345	200	165	125	4	18
DN65	2½"	DIN	1.6MPa	362	200	185	145	4	18
DN80	3"	DIN	1.6MPa	378	200	200	160	8	18
DN100	4"	DIN	1.6MPa	397	250	220	180	8	18
DN125	5"	DIN	1.6MPa	422	250	250	210	8	18
DN150	6"	DIN	1.6MPa	455	300	285	240	8	22
DN200	8"	DIN	1.6MPa	512	350	340	295	12	22
DN250	10"	DIN	1.6MPa	588	450	405	355	12	26
DN300	12"	DIN	1.6MPa	641	500	460	410	12	26

제품 치수 DIMENSION

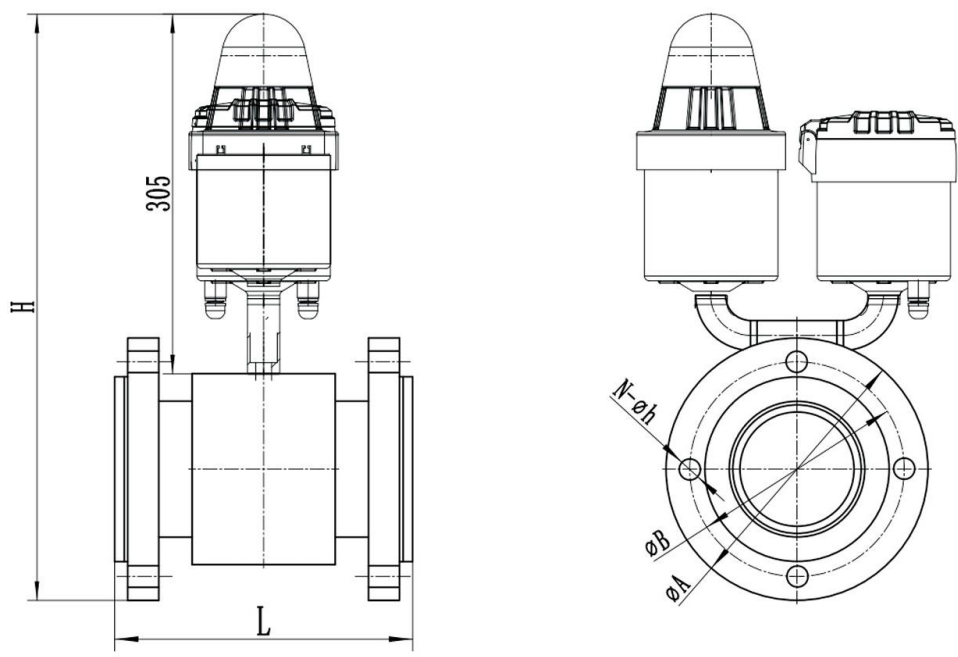


Battery with RS485 MODBUS/Wireless and DIN PN16 flange Drawing (Unit: mm)


Nominal Size		Flange Standard	Nominal Pressure	H	L	φA	φB	N	φh
mm	Inch								
DN40	1½"	DIN	1.6MPa	434	200	150	110	4	18
DN50	2"	DIN	1.6MPa	450	200	165	125	4	18
DN65	2½"	DIN	1.6MPa	467	200	185	145	4	18
DN80	3"	DIN	1.6MPa	483	200	200	160	8	18
DN100	4"	DIN	1.6MPa	502	250	220	180	8	18
DN125	5"	DIN	1.6MPa	527	250	250	210	8	18
DN150	6"	DIN	1.6MPa	560	300	285	240	8	22
DN200	8"	DIN	1.6MPa	617	350	340	295	12	22
DN250	10"	DIN	1.6MPa	693	450	405	355	12	26
DN300	12"	DIN	1.6MPa	746	500	460	410	12	26

측정 모드 Measuring Mode

Magnetic Water Meter Display

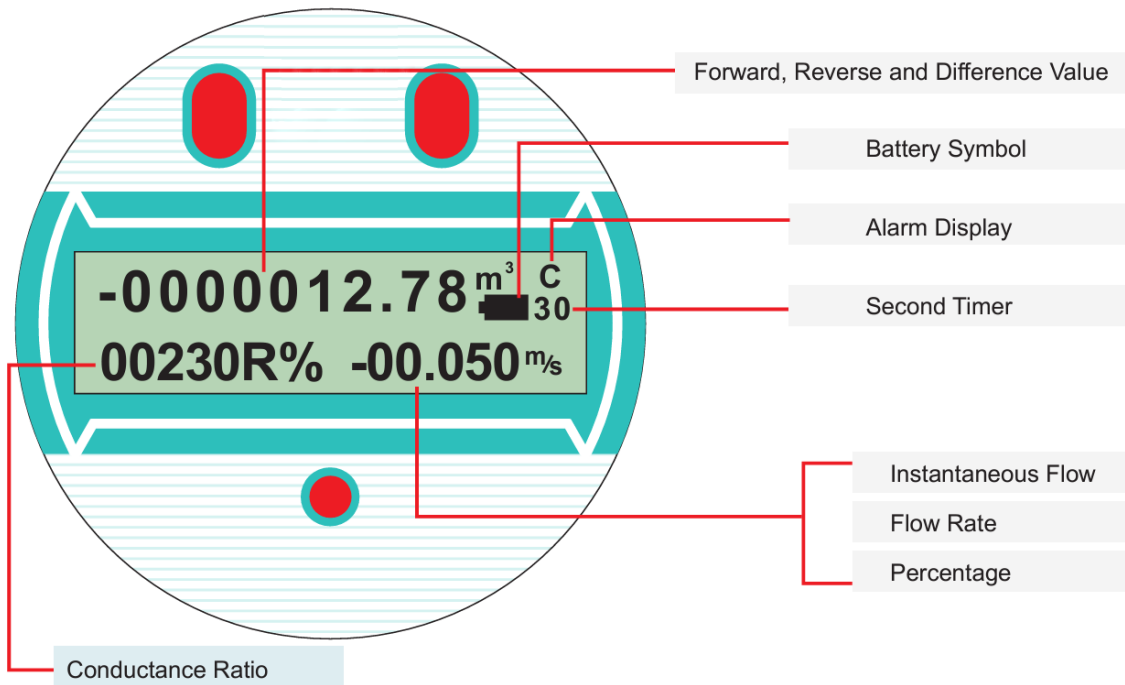

< Flow Mode >

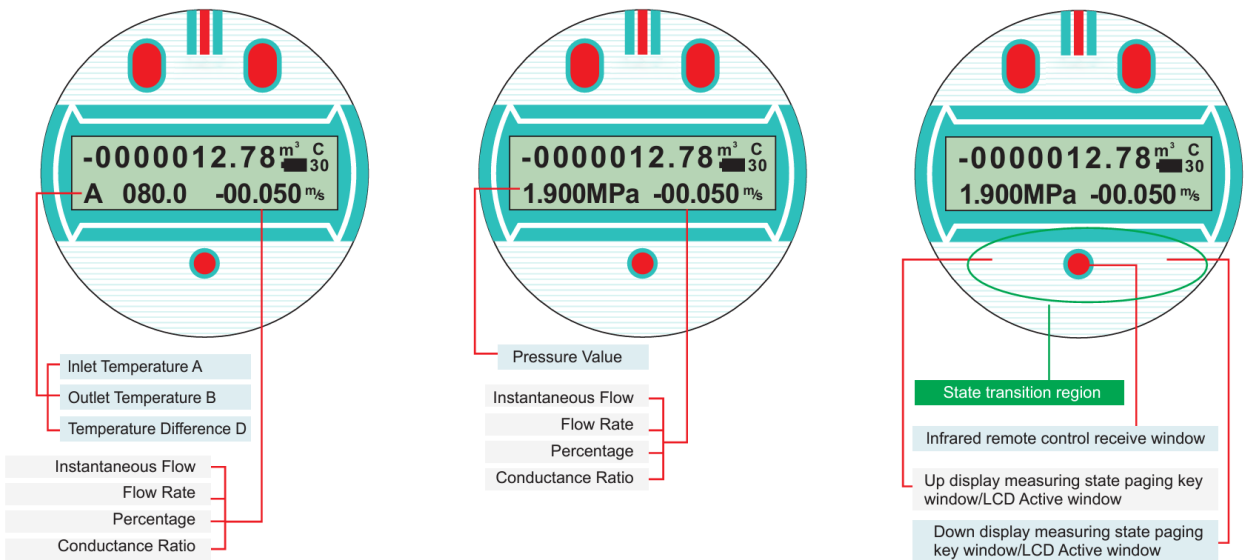

< Flow + Temperature Mode >

< Flow + Pressure Mode >

< Magnetic Key Operational Position >

유량표 FLOW RANGE TABLE

R160 Measuring Range

Size DN	40	50	65	80	100	125	150	200	250	300	400	500	600
Q ₄ Overload Flow (m³/h)	50	78.75	125	200	312.5	500	787.5	1250	2000	3125	5000	7875	12403
Q ₃ Permanent Flow (m³/h)	40	63	100	160	250	400	630	1000	1600	2500	4000	6300	9922
Q ₂ Transitional Flow (m³/h)	0.4	0.6	1.00	2	2.5	4.00	6	10.0	16	25	40	63	99
Q ₁ Minimum flow (m³/h)	0.25	0.39	0.6	1.00	2	2.5	3.9	6.3	10.0	16	25	39	62
R ratio Q ₃ /Q ₁	160												
Q ₂ /Q ₁	1.6												
Accuracy	Class 2												
Permissible Error	Q ₁ ~Q ₂ : ≤ 5%R, Q ₂ ~Q ₄ : ≤ 2%R												

R250 Measuring Range

Size DN	40	50	65	80	100	125	150	200	250	300	400	500	600
Q ₄ Overload Flow (m³/h)	50	78.75	125	200	312.5	500	787.5	1250	2000	3125	5000	7875	12403
Q ₃ Permanent Flow (m³/h)	40	63	100	160	250	400	630	1000	1600	2500	4000	6300	9922
Q ₂ Transitional Flow (m³/h)	0.26	0.4	0.6	1.0	1.6	2.6	4.0	6.4	10.5	16	26	40	64
Q ₁ Minimum flow (m³/h)	0.16	0.25	0.40	0.64	1.00	2	2.5	4.00	6	10.0	16	25	40
R ratio Q ₃ /Q ₁	250												
Q ₂ /Q ₁	1.6												
Accuracy	Class 2												
Permissible Error	Q ₁ ~Q ₂ : ≤ 5%R, Q ₂ ~Q ₄ : ≤ 2%R												

R400 Measuring Range

Size DN	40	50	65	80	100	125	150	200	250	300	400	500	600
Q ₄ Overload Flow (m³/h)	50	78.75	125	200	312.5	500	787.5	1250	2000	3125	5000	7875	12403
Q ₃ Permanent Flow (m³/h)	40	63	100	160	250	400	630	1000	1600	2500	4000	6300	9922
Q ₂ Transitional Flow (m³/h)	0.16	0.25	0.40	0.64	1.00	1.60	2.52	4.00	6.40	10.00	16	25	40
Q ₁ Minimum flow (m³/h)	0.10	0.2	0.25	0.40	0.63	1.00	2	2.50	4.00	6.25	10	16	25
R ratio Q ₃ /Q ₁	400												
Q ₂ /Q ₁	1.6												
Accuracy	Class 2												
Permissible Error	Q ₁ ~Q ₂ : ≤ 5%R, Q ₂ ~Q ₄ : ≤ 2%R												

모델 코드표 MODEL SELECTION GUIDE

KM-200W		X	X	X	X	X	X	X	X	X	X
Size	DN40-DN300										
Structure	Compact	C									
	Remote	R									
R value	R160	1									
	R250	2									
	R400	3									
Sensor Material	Carbon steel		CS								
	SS304		4								
	SS316		6								
Liner	Hard rubber			R							
	PTFE (only for R160 and R250)			F							
Electrodes	SS316L				1						
	Hastelloy C				2						
Power Supply	3.6V lithium battery					B1					
	3.6V lithium battery + 24 VDC					B2					
	3.6V lithium battery + 220 VAC					B3					
Protocol	RS485 Modbus-RTU (one enclosure, battery)						1				
	RS485 Modbus-RTU (two enclosures, battery + RS485 modular)						2				
	GPRS						3				
	Pulse						4				
	No						5				
Flange	DIN PN16							D			
	ANSI 150#							A			
	JIS 10K							J			
	Others							O			
Pressure Sensor	No								N		
	Yes								P		
SIM Card	No										N
	Yes										S

제품 및 검교정 문의 연락처

TEL : 032-512-6230

FAX : 032-513-6230

E-MAIL : info@flowmeters.co.kr

본사 : 인천광역시 부평구 안남로 425-10



(주)엠엔씨 엔지니어링
M&C Engineering Inc.



2025_KM-200W_01

정확한 계측과 신뢰도 높은 측정 장치의 기준, 엠엔씨 엔지니어링이 앞장서겠습니다.

www.flowmeters.co.kr / www.kmeter.co.kr



INNOBIZ

KMETER

KASTO