

80G RADAR LEVEL METER

80G 레이더 레벨계

KRD Series



RADAR LEVEL METER

레이더 레벨계

K R D
SERIES

K-METER

액체 및 분체용 레벨 측정



RADAR
LEVEL METER

특징 FEATURE

- 비접촉식 레이더 센서
- 80G 레이더 레벨 신호 전송
- 최대 3° 좁은 빔 각도
- 최대 1mm 수준의 높은 정확도
- 높은 신호 대 잡음비
- 4-20mA, RS-485 등 다양한 통신 방식 지원



저장탱크



급수시설



저수지



배수시설



곡물창고



개방수로

적용 산업 APPLICATIONS

- 다양한 저장탱크
- 저수지 및 개방수로
- 급배수시설
- 곡물 저장고
- 화학 공정
- 수처리 및 폐수 처리
- 종이 펄프 산업
- 시멘트 및 분체 산업
- 이외의 다양한 응용 산업

레이더 레벨계 KRD 시리즈

사 양 정 보							
구 분 \ 모 델 명	KRD-81	KRD-82	KRD-83	KRD-84	KRD-85	KRD-86	KRD-87
측정 범위 ((Measuring Range)	10m,20m,30m	10m, 20m, 30m , 80m, 120 m	10m, 20m, 30m , 80m, 120 m	10m, 20m, 30m , 80m, 120 m	10m, 20m, 30m , 80m, 120 m	10m,20m,30m	10m, 20m, 30m , 80m, 120 m
적용 매체 (Application)	약부식성 액체	약부식성 액체	분체 / 분말 / 고체	부식성 액체	고온 부식성 액체	부식성 액체	고온 / 고압 액체 및 고체
적용 환경 (Process Condition)	교반, 응축	교반, 응축	강한 분진	교반, 응축	고온, 교반, 응축	교반, 응축	고온/고압공정
공정 연결 (Process Connection)	1.5" Thread, Flange	3.5" Thread, Flange	Flange with purging	Flange	Flange	Flange	Flange
공정 온도 (Process Temperature)	-30 ~ +100 ℃	-30 ~ +80 ℃	-30 ~ +100 ℃	-30 ~ +75 ℃	-40 ~ +200 ℃	-30 ~ +100 ℃	-40 ~+1,000 ℃
공정 압력 (Pressure)	-0.1 ~ 0.3 MPa	-0.1 ~ 0.3 Mpa	-0.1 ~ 0.3 MPa	-0.1 ~ 0.1 MPa	-0.3 ~ 2 MPa	-0.1 ~ 2 MPa	-0.5 ~ 3 MPa
빔 각도 (Beam Angle)	8°	3°	3°	5°	5°	8°	3°
지시부 구조 (Structurer)	Compact, Remote						
정확도 (Accuracy)	±1 mm (≤30mm) ±3 mm (>30mm)		±5 mm	±1 mm (≤30mm) ±3 mm (>30mm)			
주변 온도 (Ambient Temperature)	- 30 ~ + 70℃						
분해능 (Resolution)	Resolution ±1mm (Under ideal laboratory condition)						
사각지대 (Blind zone)	0.15m for 35m, 0.4m for 85m, 0.6m for 120m						
주파수 (Frequency)	76 ~ 81GHz, FM scanning frequency width 5GHz						
재질 (Material)	Wetted Parts : PTFE (KRD-81 ~ 86), Carbon steel / SS304 / SS316 (KRD-87) Shell : Cast Aluminium, SS304, SS316						
전원 (Power Supply)	18~28 VDC, 85~865 VAC						
출력 (Signal Output)	Two-wire / four-wire 4~20mA, HART / RS485 Modbus / Bluetooth						
방폭 등급 (Explosion Proof)	Ex d IIC T6 Gb (Optional)						
지원 언어 (Language)	English, Spanish, Russian, Portuguese, Korean						

제품 구조 및 치수 STRUCTURE & DIMENSION


KRD - 81



Thread Connection



Flange connection

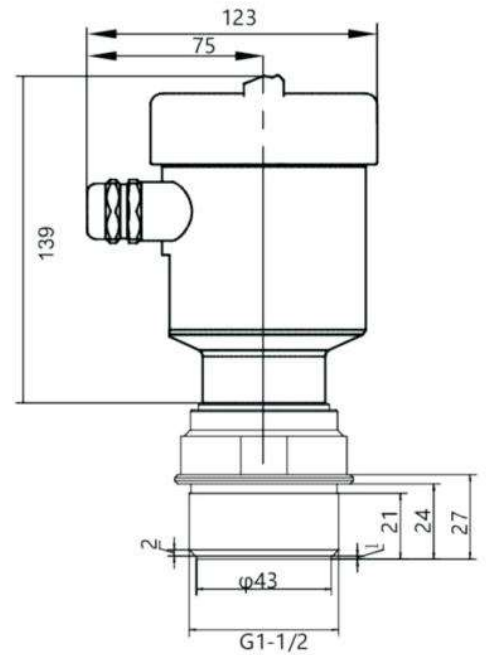


KRD - 82



Thread Connection




Flange connection

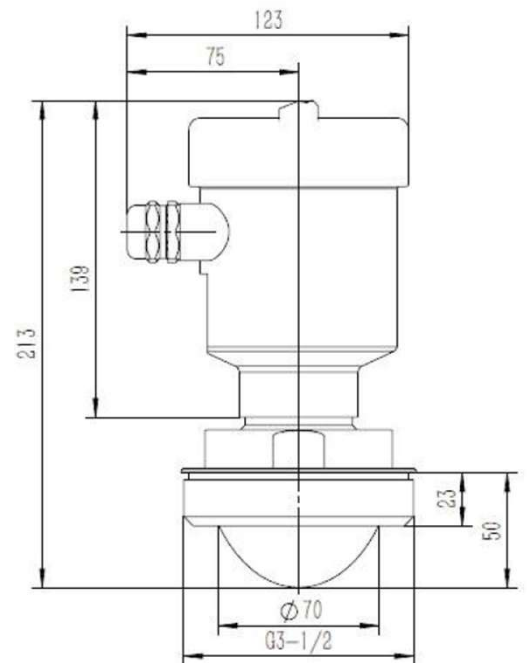


제품 구조 및 치수 STRUCTURE & DIMENSION

KRD - 83

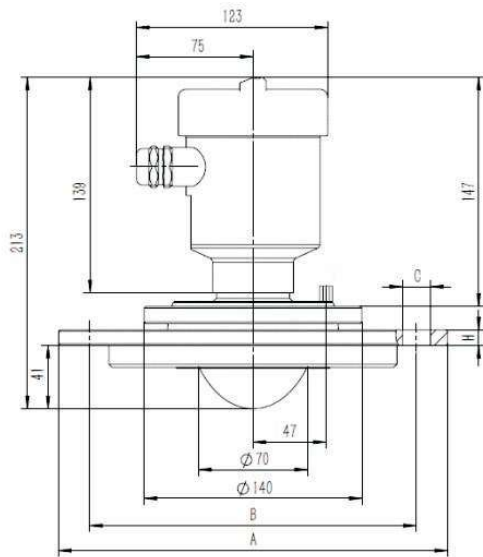


DN	A	B	C	H
DN80	190	150	4-φ18	15
DN100	210	170	4-φ18	15
DN125	240	200	8-φ18	17
DN150	265	225	8-φ18	17
DN200	320	280	8-φ18	19

KRD - 84

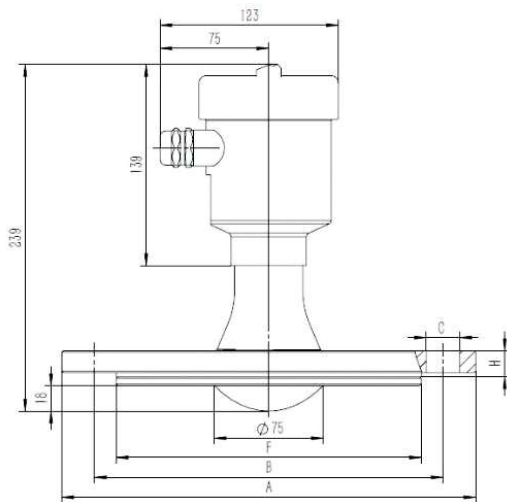

DN	A	B	C	F	H
DN80	φ190	φ150	4-φ18	φ128	18
DN100	φ210	φ170	4-φ18	φ148	18
DN125	φ240	φ200	8-φ18	φ178	20
DN150	φ265	φ225	8-φ18	φ202	20
DN200	φ320	φ280	8-φ18	φ258	20


KRD - 85

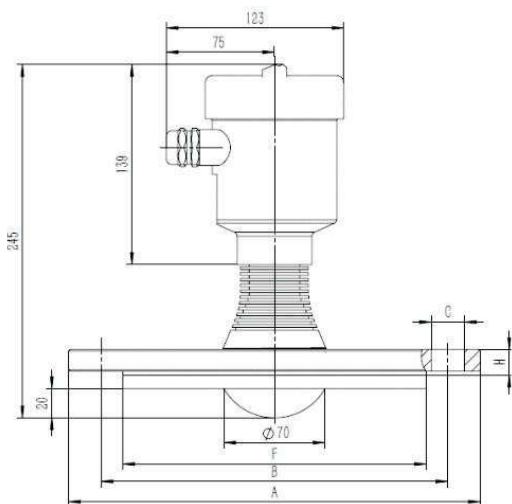

DN	A	B	C	F	H
DN80	φ200	φ160	8-φ18	φ138	20
DN100	φ220	φ180	8-φ18	φ158	22
DN125	φ250	φ210	8-φ18	φ188	22
DN150	φ285	φ240	8-φ22	φ212	24
DN200	φ340	φ295	12-φ22	φ268	26


제품 구조 및 치수 STRUCTURE & DIMENSION

KRD - 86

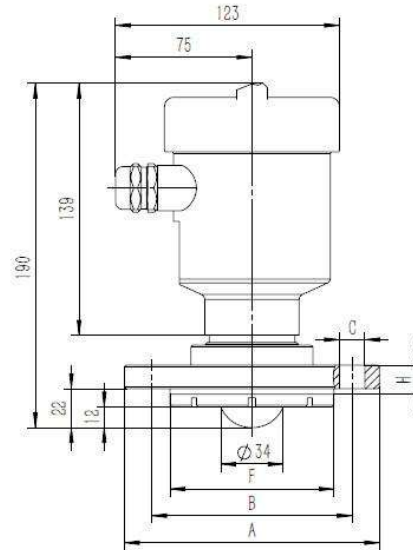

DN	A	B	C	F	H
DN80	Φ140	φ110	4-φ14	φ90	16
DN100	Φ160	Φ130	4-φ14	Φ110	16

KRD - 87

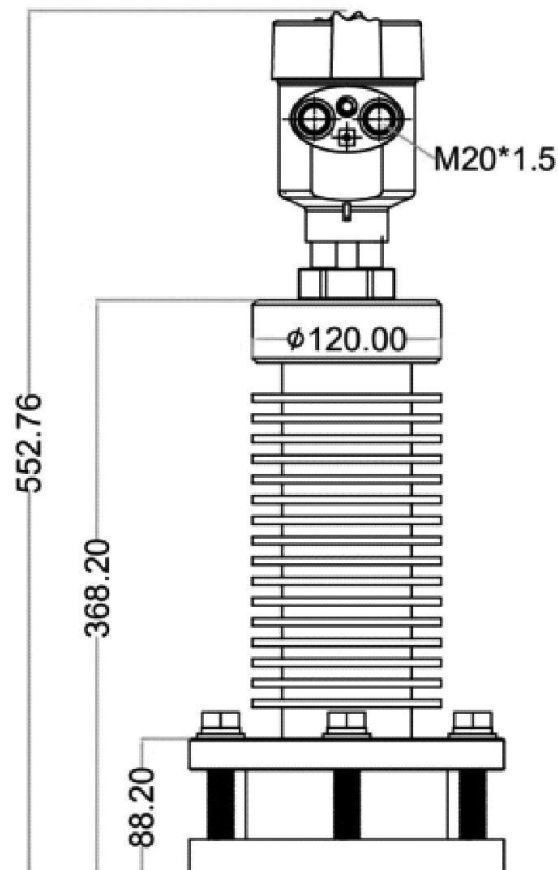

모델 코드표 MODEL SELECTION GUIDE

	KRD-81	X	X	X	X	X	X	X	X
Measuring Range	10m	10							
	20m	20							
	30m	30							
Process Connection	G1½" thread	1							
	1½" NPT thread	2							
	DN40 flange	3							
	DN50 flange	4							
	DN80 flange	5							
	DN100 flange	6							
	DN125 flange	7							
	DN150 flange	8							
Power Supply	18~28 VDC		D						
	85~265 VAC		A						
Medium Temperature	-30~100°C		T						
Signal Output	Two-wire 4~20 mA + HART					H			
	RS485 Modbus					RS			
	Bluetooth					B			
Shell Material	Cast Aluminium						A		
	SS304						4		
	SS316						6		
Explosion Proof	Without							N	
	Ex d IIC T6 Gb							E	
Structure	Compact								C
	Remote (10m cable)								R

모델 코드표 MODEL SELECTION GUIDE

	KRD-82	X	X	X	X	X	X	X	X
Measuring Range	10m	10							
	20m	20							
	30m	30							
	80m	80							
	120m	120							
Process Connection	G3½" thread	1							
	3½" NPT thread	2							
	DN80 flange	3							
	DN100 flange	4							
	DN120 flange	5							
Power Supply	18~28 VDC		D						
	85~265 VAC		A						
Medium Temperature	-30~80℃			T					
Signal Output	Two-wire 4~20 mA + HART					H			
	RS485 Modbus					RS			
	Bluetooth					B			
Shell Material	Cast Aluminium						A		
	SS304						4		
	SS316						6		
Explosion Proof	Without							N	
	Ex d IIC T6 Gb							E	
Structure	Compact								C
	Remote (10m cable)								R

모델 코드표 MODEL SELECTION GUIDE

	KRD-83	X	X	X	X	X	X	X	X
Measuring Range	10m	10							
	20m	20							
	30m	30							
	80m	80							
	120m	120							
Process Connection	DN80 Flange	1							
	DN100 Flange	2							
	DN125 flange	3							
	DN150 flange	4							
Power Supply	18~28 VDC		D						
	85~265 VAC		A						
Medium Temperature	-30~80°C		T						
Signal Output	Two-wire 4~20 mA + HART					H			
	RS485 Modbus					RS			
	Bluetooth					B			
Shell Material	Cast Aluminium						A		
	SS304						4		
	SS316						6		
Explosion Proof	Without							N	
	Ex d IIC T6 Gb							E	
Structure	Compact								C
	Remote (10m cable)								R

모델 코드표 MODEL SELECTION GUIDE

	KRD-84	X	X	X	X	X	X	X	X
Measuring Range	10m	10							
	20m	20							
	30m	30							
	80m	80							
	120m	120							
Process Connection	DN80 Flange	1							
	DN100 Flange	2							
	DN125 flange	3							
	DN150 flange	4							
Power Supply	18~28 VDC		D						
	85~265 VAC		A						
Medium Temperature	-30~75°C		T						
Signal Output	Two-wire 4~20 mA + HART					H			
	RS485 Modbus					RS			
	Bluetooth					B			
Shell Material	Cast Aluminium						A		
	SS304						4		
	SS316						6		
Explosion Proof	Without							N	
	Ex d IIC T6 Gb							E	
Structure	Compact								C
	Remote (10m cable)								R

모델 코드표 MODEL SELECTION GUIDE

	KRD-85	X	X	X	X	X	X	X	X
Measuring Range	10m	10							
	20m	20							
	30m	30							
	80m	80							
	120m	120							
Process Connection	DN80 Flange	1							
	DN100 Flange	2							
	DN125 flange	3							
	DN150 flange	4							
Power Supply	18~28 VDC		D						
	85~265 VAC		A						
Medium Temperature	-30~200°C		T						
Signal Output	Two-wire 4~20 mA + HART					H			
	RS485 Modbus					RS			
	Bluetooth					B			
Shell Material	Cast Aluminium						A		
	SS304						4		
	SS316						6		
Explosion Proof	Without							N	
	Ex d IIC T6 Gb							E	
Structure	Compact								C
	Remote (10m cable)								R

모델 코드표 MODEL SELECTION GUIDE

	KRD-86	X	X	X	X	X	X	X	X
Measuring Range	10m	10							
	20m	20							
	30m	30							
	80m	80							
	120m	120							
Process Connection	DN80 Flange	1							
	DN100 Flange	2							
	DN125 flange	3							
	DN150 flange	4							
Power Supply	18~28 VDC		D						
	85~265 VAC		A						
Medium Temperature	-30~100°C		T						
Signal Output	Two-wire 4~20 mA + HART					H			
	RS485 Modbus					RS			
	Bluetooth					B			
Shell Material	Cast Aluminium						A		
	SS304						4		
	SS316						6		
Explosion Proof	Without							N	
	Ex d IIC T6 Gb							E	
Structure	Compact								C
	Remote (10m cable)								R

모델 코드표 MODEL SELECTION GUIDE

	KRD-87	X	X	X	X	X	X	X	X
Measuring Range	10m	10							
	20m	20							
	30m	30							
	80m	80							
	120m	120							
Process Connection	DN80 Flange	1							
	DN100 Flange	2							
	DN125 flange	3							
	DN150 flange	4							
Power Supply	18~28 VDC		D						
	85~265 VAC		A						
Medium Temperature	-40~1,000°C		T						
Signal Output	Two-wire 4~20 mA + HART					H			
	RS485 Modbus					RS			
	Bluetooth					B			
Shell Material	Cast Aluminium						A		
	SS304						4		
	SS316						6		
Explosion Proof	Without							N	
	Ex d IIC T6 Gb							E	
Structure	Compact								C
	Remote (10m cable)								R

제품 및 검교정 문의 연락처

TEL : 032-512-6230

FAX : 032-513-6230

E-MAIL : info@flowmeters.co.kr

본사 : 인천광역시 부평구 안남로 425-10



(주)엠앤씨 엔지니어링
M&C Engineering Inc.

2026_KRD_R01

정확한 계측과 신뢰도 높은 측정 장치의 기준, 엠앤씨 엔지니어링이 앞장서겠습니다.

www.flowmeters.co.kr, www.kmeter.co.kr



INNOBIZ

KMETER KASTO