



ALIAPANEL

Flow Computer

Model AFC365 Series

GENERAL

ALIAPANEL The AFC365 Series Flow Computer is a microprocessor-based instrument designed to measure compensated flow in the industrial environment. The AFC365 incorporates the Ideal Gas / Steam / Natural Gas compensation. The Backlit LCD display simplifies programming and clearly indicates all parameters as well as engineering units.

FEATURES

- DIN Size (96 * 96 mm), 320 * 240 Pixels, 4-line LCD display
- Built-in 8 MB memory, applicable to long-term data record
- Common input signal: mA, RTD, Frequency etc.
- High Accuracy $\pm 0.1\%$ of Reading
- 4-20 mA / Relay / RS485 output
- Ideal Gas / General Gas / Steam / Energy formula
- 24 VDC Aux. power supply available for 2-Wire system
- Fascia Sealing for IP65 (NEMA 4X) water tight
- Hourly / Daily / Monthly / Yearly history data record



STANDARD SPECIFICATION

- | | | | |
|------------------------|---|------------------------|--|
| ● Number of Inputs | : 3 Channels | ● Display | : 3.5" Mono-screen LCD with Backlit |
| ● Flow Function | | ● Response Time | : 100 ms |
| Input | : 4-20 mA / Frequency (0-10 kHz) | ● Keypad | : 6 keys for programming and display control |
| Display | : 5 Digits flowrate with decimal point | ● Engineering Unit | : 21 different engineering units |
| Accuracy | : $\pm 0.1\%$ of reading | ● Parameter Protection | : 2 Password entries (6 Digits) for Supplier and User |
| ● Temperature Function | : One or Two point (Energy calculator) | ● Logging Rate | : 1-60 minutes Per Data |
| Input | : PT100 / 4-20 mA | ● Recording Capability | : 30 days (1 Data / Minutes) |
| Display | : 4 digits temperature value with decimal point | | : 1800 days (1 Data / Hour) |
| Accuracy | : $\pm 0.1^\circ\text{C}$ | ● Storage Memory | : 8 MB (on board) |
| ● Pressure Function | | ● Recycling Mode | : Newest data overwrites oldest data |
| Input | : 4-20 mA | ● Protection Class | : NEMA4 / IP65 (Fascia sealing) |
| Display | : 5 Digits pressure value with decimal point | ● Weight | : 0.5 kg Maximum |
| Accuracy | : $\pm 0.1\%$ of reading | ● Dimensions | : 96 mm (W) * 96 mm (H) * 150 mm (D) |
| ● Calculation Function | : Ideal Gas, Temperature & Pressure Comp. | ● Ambient Temperature | : $-10\sim 60^\circ\text{C}$ |
| | : General Gases, Temp & Pressure Comp. | ● Ambient Humidity | : 10-85% RH ($5\sim 40^\circ\text{C}$) |
| | : Natural Gas, NX-19 ² Formula | ● Power Supply | : 85-260 VAC, 50/60 Hz |
| | : Saturated Steam, Superheated Steam | ● Vibration Test | : 10-60 Hz, 10 m/s ² for 3 hours |
| | : Liquid Mass, Density calculation | ● Power Consumption | : $\leq 10\text{ W}$ |
| ● Alarm Types | : High & Low alarm, Incr. & Decr. alarm | ● Communication | : RS485 (MODBUS Protocol) |
| ● Aux. Power Output | : 12 VDC / 24 VDC, 100 mA for Flow Transmitter | ● Parameter Storage | : Operation parameters are stored by EEPROM for more than 10 years |
| | : 24 VDC, 100 mA for Temperature Transmitter | | |
| | : 24 VDC, 100 mA for Pressure Transmitter | | |
| ● Output | : 4-20 mA, Load 750 Ω * 1 point | | |
| | : Relay, 3 A / 250 V * 1 point | | |






ALIA TECHNOLOGY LLC

633 W. 5th Street, 26th Floor, Los Angeles, CA 90071, USA
TEL : + 1 - 213 - 533 - 4139 FAX : + 1 - 213 - 223 - 2317




URL : www.alia-inc.com
E-mail : alia@alia-inc.com
AFC365V1.2.3.r4.A4.en


FUNCTIONS

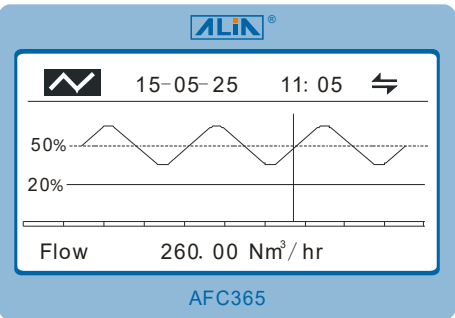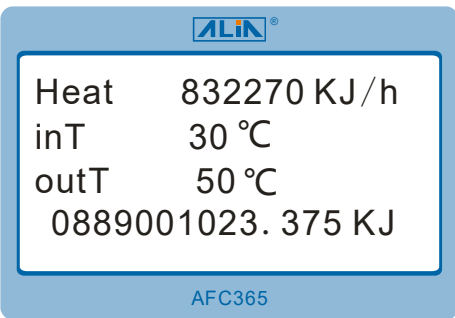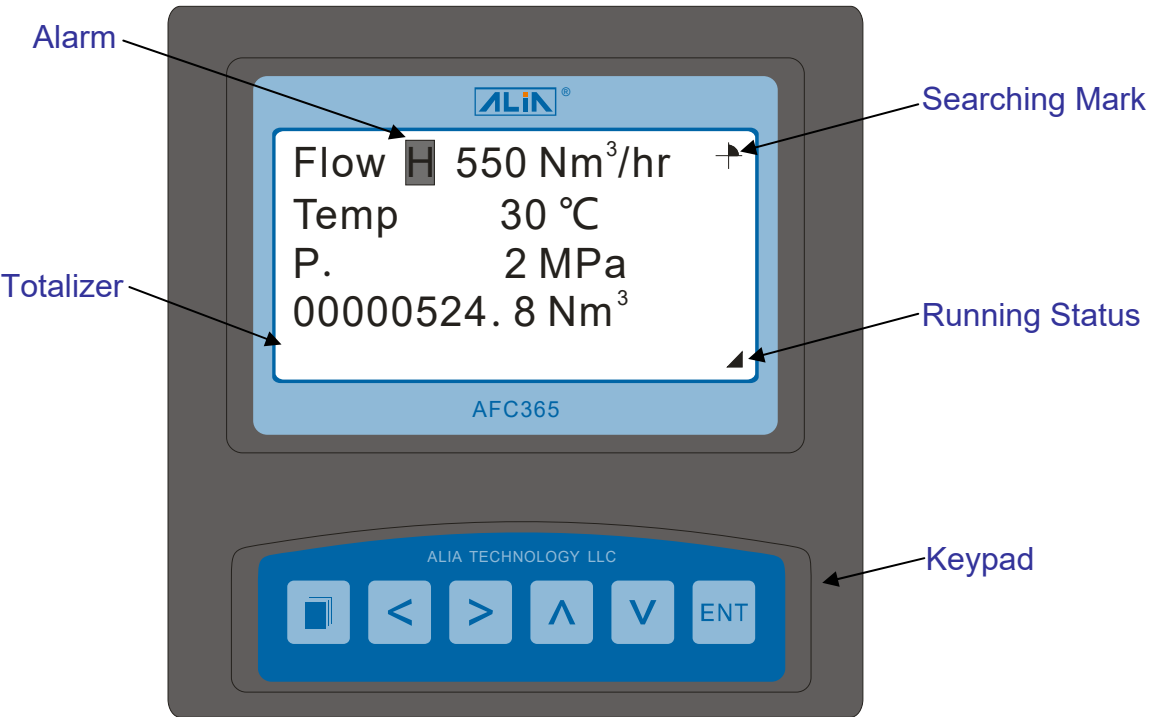

DIMENSIONS

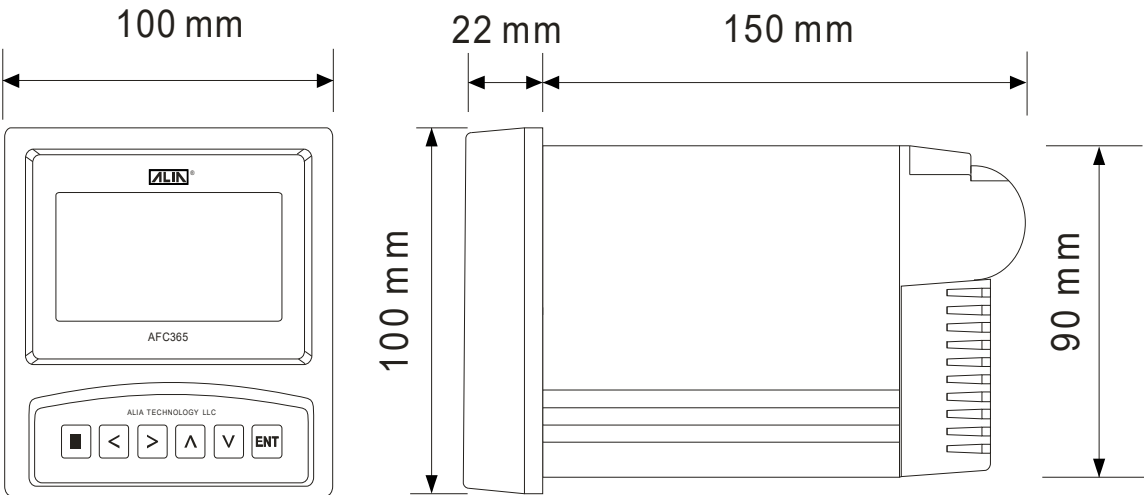


WIRING DIAGRAM

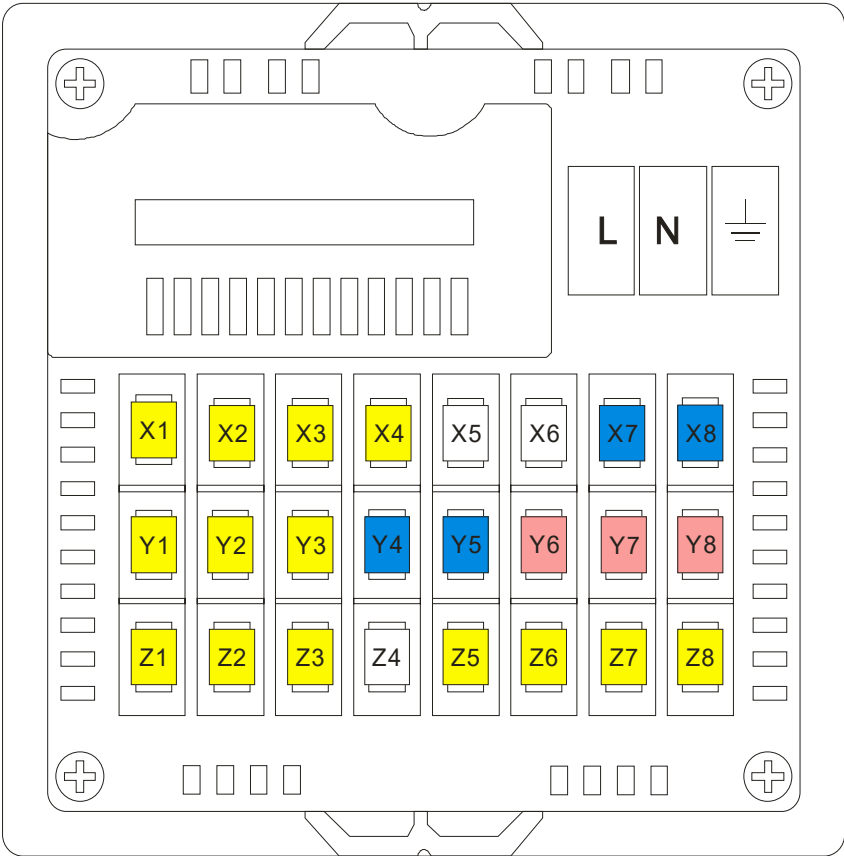


WIRING				EXAMPLE	
Pressure / Rtn Temp.		None		Pressure Input (mA)	Pressure Transmitter (2-Wire)
Temp.(Sup)		mA Output		Temp. Sensor (PT100 Ω)	Temp. Transmitter (2-Wire)
Flow Input (mA)		Flow Input (Pulse)		Flow (4-20 mA)	Flow (Pulse)
				D/P Flowmeter (Orifice)	Vortex Flowmeter

APPLICATION

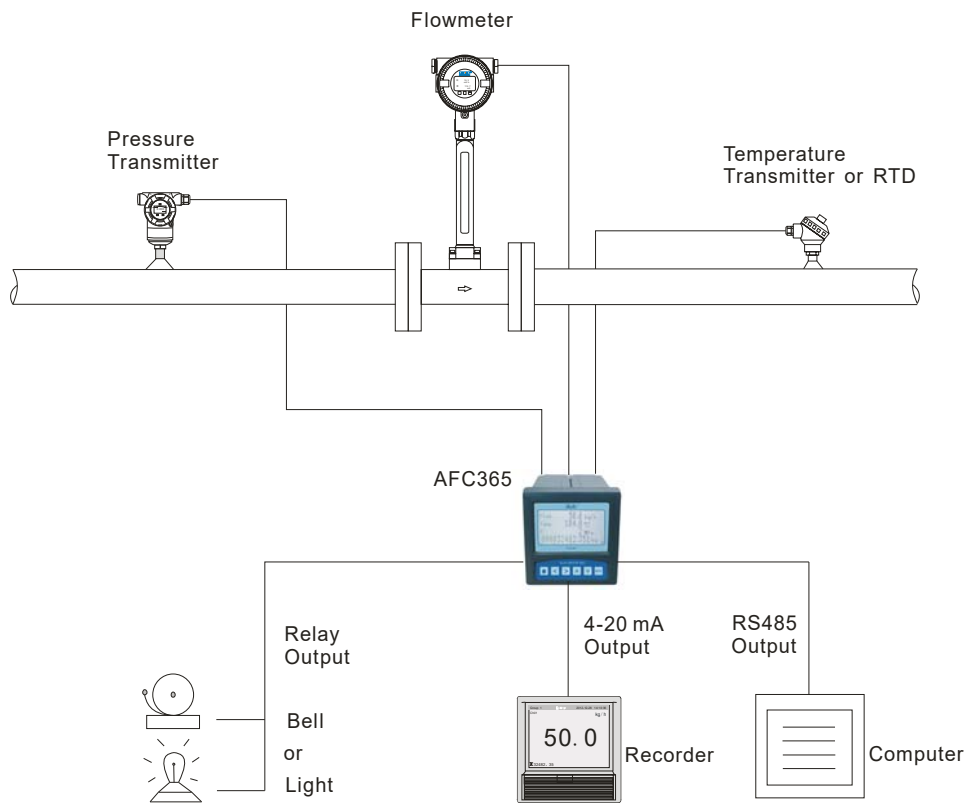

Flow with Temperature / Pressure Compensation

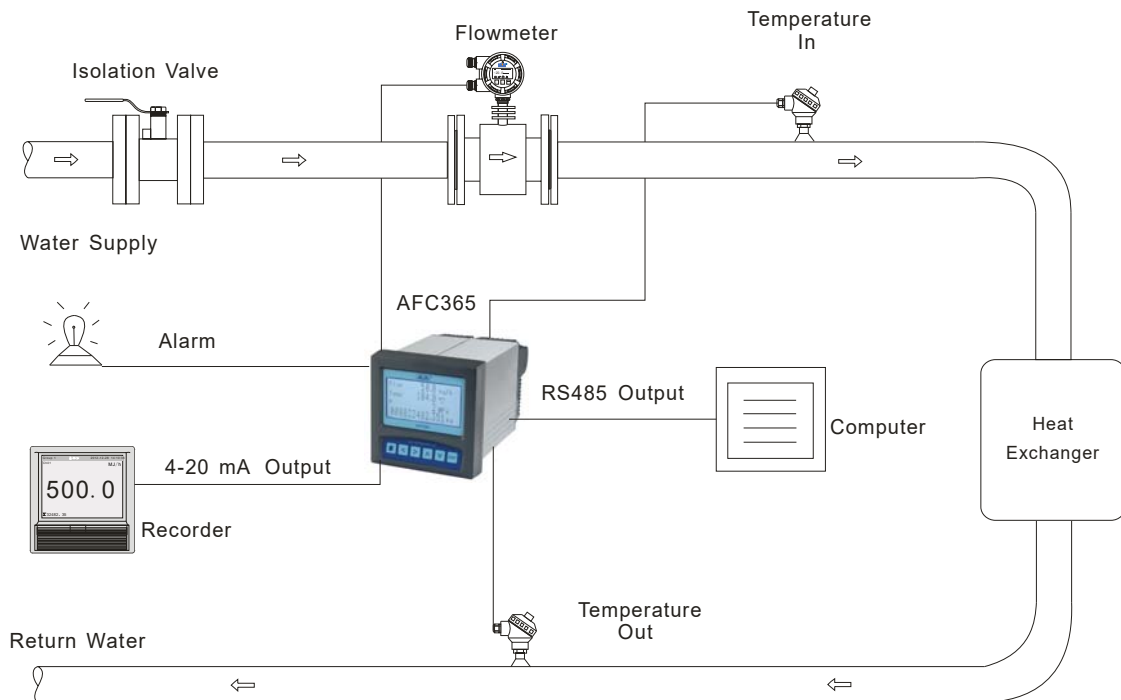

Heating / Cooling Energy Calculator