

ULTRASONIC FLOWMETER

FT-160

FEATURE

- 정확성 : 판독 값의 $\pm 0.5\%$
- 측정 가능 배관 : DN 50mm ~ 7000mm
- 측정 가능 유체 : 대부분의 액체
- 사용 온도 : $-40^{\circ}\text{C} \sim 150^{\circ}\text{C}$
- 사용전원 : 100 ~ 230 VAC
- 디스플레이 : 2 X 16 백라이트 LCD
- 출력 : 4 ~ 20 mA, Pulse

[국제공인교정기관]



(주)엠앤씨엔지니어링

인천광역시 부평구 안남로425-10

TEL : 82-32-512-6230

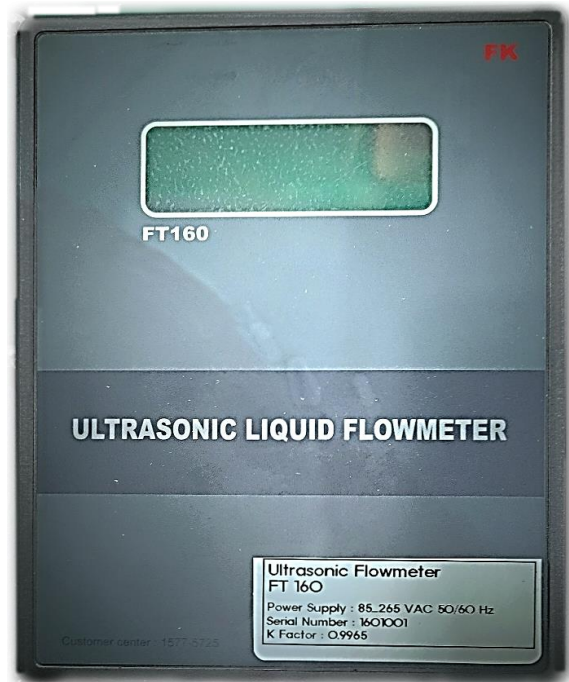
FAX : 82-32-513-6230

E-MAIL : info@flowmeters.co.kr

For more information

www.flowmeters.co.kr

www.kmeter.co.kr



ULTRASONIC FLOWMETER

Model : FT-160

TECHNICAL DATA

정확성	판독값의 $\pm 0.5\%$
재현성	판독값의 $\pm 0.1\%$
응답시간	1초
측정유속	± 10 m/s
측정가능 배관사이즈	50 ~ 7000 mm
디스플레이	2 x 16 백라이트 LCD
측정온도	-40 °C ~ 150 °C
측정가능 유체	물, 해수, 초순수, 폐수, 각종 식음료, 각종 화학품 등
센서	기본 C-RS 1MHz, 0.5MHz, 2MHz 옵션 사항
전원사양	100 ~ 230 VAC
트랜스미터 치수/무게	185 x 150 x 90 mm / 1kg

SENSOR SPECIFICATION

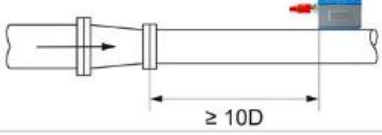
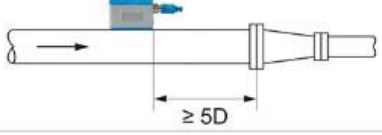
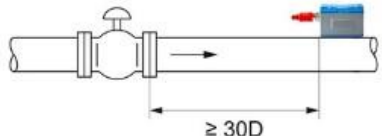
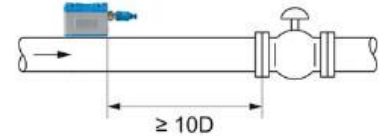
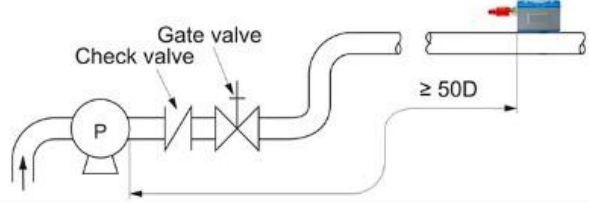
타입	주파수	모델	측정 사이즈	온도
클램프 온 타입 (C-RS)	0.5 Mhz	401	50 ~ 7000 mm	-40°C ~ 150°C
	1 Mhz	402	50 ~ 7000 mm	
	2 Mhz	403	50 ~ 200 mm	

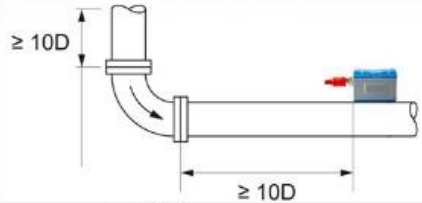
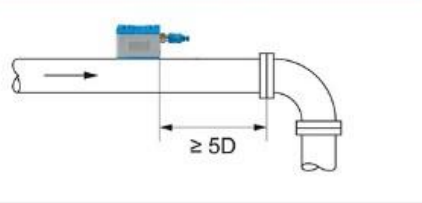
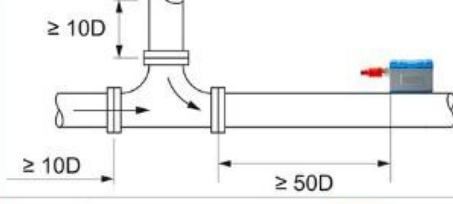
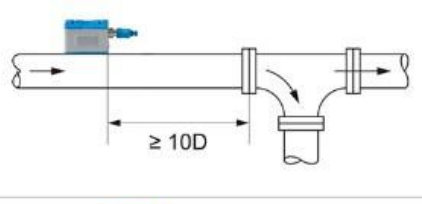
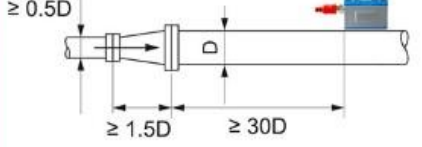
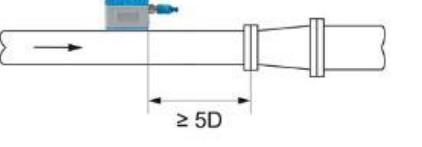
ULTRASONIC FLOWMETER

Model : FT-160

INSTALLATION

(D: inside diameter of pipe)

	Upstream	Downstream
Tapered pipe	 $\geq 10D$	 $\geq 5D$
Valves	 $\geq 30D$ In the case where a flow control valve exists on upstream side	 $\geq 10D$ In the case where a flow control valve exists on downstream side
Pump	 $\geq 50D$	

	Upstream	Downstream
90° bend	 $\geq 10D$ $\geq 10D$	 $\geq 5D$
T-shaped pipe	 $\geq 10D$ $\geq 10D$ $\geq 50D$	 $\geq 10D$
Expanding pipe	 $\geq 0.5D$ $\geq 1.5D$ $\geq 30D$	 $\geq 5D$