

SINGLE PANEL TWO WAYS DETECTION

Inspecta HD 620

TUWAIQ
technology

FAST. RELIABLE. UNMATCHED
DETECTION.



KEY FEAUTRES

1. Metal detection panel
2. Lanyard hole
3. LED Indicator Light
4. Sensitivity adjustment (L: low sensitivity M: medium sensitivity H: high sensitivity)
5. Indicator light (Red: metal alarm; Yellow: low power indicator; Green: power indicator)
6. Alarm mode adjustment (🔔 ring bell, 🚫 silence, 📢 vibration)
7. Power switch
8. Handle
9. Label position
- 10.5 Sensitivity adjusting hole
11. The speaker hole
12. Battery cover
13. Charging probe (optional)

The Inspecta HD 620 is a high-sensitivity handheld metal detector engineered for dependable, accurate, and efficient security screening.

Compact yet powerful, it delivers fast and precise detection of metallic threats from weapons and contraband to concealed metal objects ensuring reliable performance in demanding environments. Its ergonomic design, rapid response time, and ease of operation make it ideal for use at security checkpoints, public events, airports, schools, government buildings, stadiums, transportation hubs, and other high-security facilities.

STANDARD FEATURES:

• Basic Parameters

Dimensions: L360mm × W80mm × H41mm
Power supply: 2*AA batteries (1.5V one-time or 1.2V rechargeable)
Working temperature: 10°C ~ +65°C
Humidity: 0~95%
Alarm signal
 ◦ Sound mode: buzzer and red LED, metal indicator LED
 ◦ Vibration mode: Vibration and red LED, metal indicator LED
Power consumption: maximum 270MW
Working frequency: 22KHZ
Standby current: <5MA
Working voltage: 2.5~9V

• Detection Distance

Pin: 30~60mm
Type 64 pistol: 150mm
Six-inch dagger: 160mm
Diameter 20mm steel ball: 90mm

• Product Features

High sensitivity
LED indicator light shows metal strength
Convenient and easy operating, no need to adjust
Power saving, can work for 40 hours continuously
There are automatic continuous alarm once battery is low
There are voice indicator for power on and off
There is a switch button for sound, LED and vibration

• Method Of Use

When you turn on the device, you will hear a "click" sound, indicating that the power is connected, and the green light will turn on. If there is no sound, the battery is not installed or the battery contact is poor. If the sound appears continuously, then it indicates that the battery can no longer be used and should be replaced with a new one

Highly sensitive detection is possible. Hold the handle and scan the detection surface around the object. When there is a metal object, an alarm sounds and the green light turns to red. If scanning is stopped, the alarm stops and the red light turns to green

• Sensitivity Adjustment

If the detection distance does not meet the specified requirements or the sensitivity is too high, resulting in instability or sound when scanning the human body without metal, the sensitivity should be adjusted

Use a small slotted screwdriver to rotate the button inside the small hole on the handle of the detector (Position 12), turn it clockwise until it makes a sound, then turn it counterclockwise until it stops making a sound, then turn it counterclockwise half a turn until the sensitivity meets the requirements

• Product Usage

Electronic metal detection inspection at airports, prisons, customs, stations and docks
Customs, public security, border defense and other security inspections
Quality inspection of pharmaceutical and food business systems
Security inspection of important places and sports grounds
Precious metal detection, such as gold and silver jewelry factories, electronics factories, hardware factories, warehouses, etc

• Attention

Please use designated batteries and don't forget to turn off the power after use
Please remove the battery when the device is not used for a long time
The device will not make any sound when fixed on a metal object. And it only makes a sound when it sweeps over a metal object
Do not mix old and new batteries and batteries of different types
Please dispose of the replaced old battery according to local regulations


• Replace The Battery

Loosen the screw with a screwdriver to open the back cover of the battery compartment.
Insert batteries correctly according to the positive and negative symbols in the battery box.
Close the battery cover then screw it tightly.


Distributed By:

Note: The product images shown are for illustration only. Actual design may vary slightly depending on manufacturing updates

PRODUCT INTRODUCTION

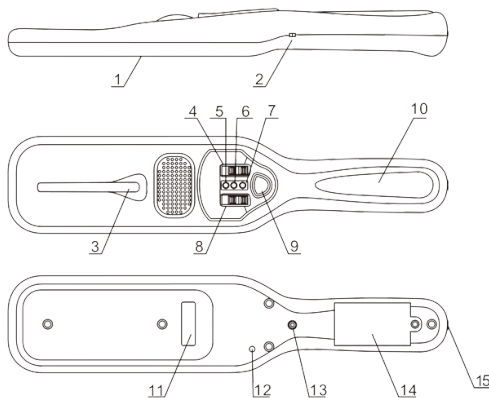

BASIC PARAMETERS

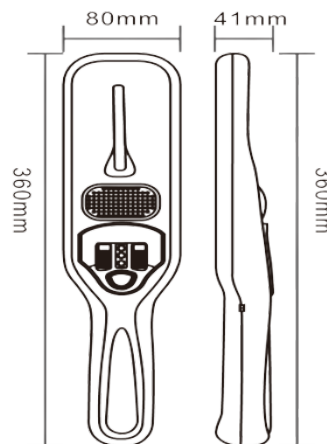

REPLACE THE BATTERY

