


VICINITY MAP - RECORD REFERENCE



NOT TO SCALE

H: NAD83 V: NAVD88 (FT)
EXISTING CONTOUR INTERVAL: 2 FT

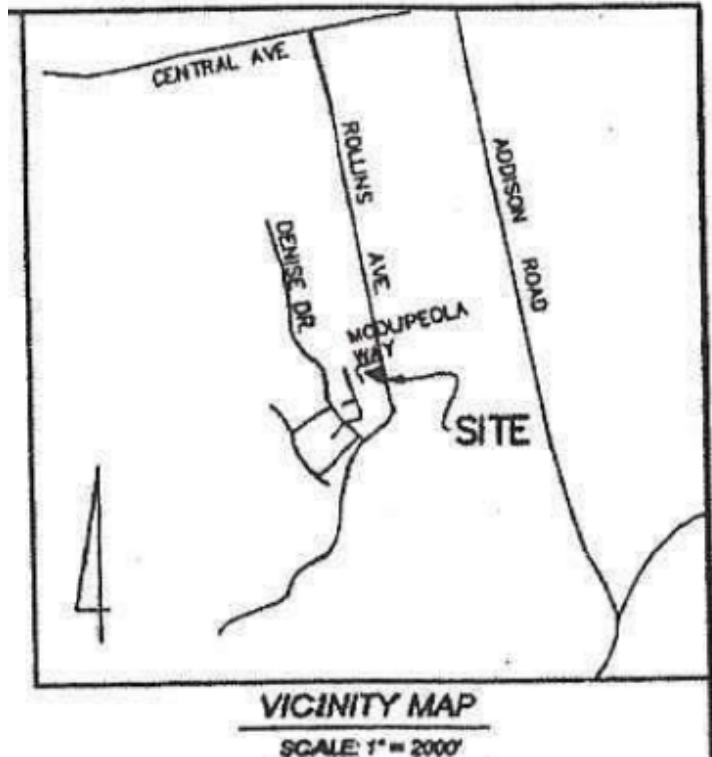

PROPOSED LIMIT OF DISTURBANCE: 19,171 SF

LOD - - - - | FULL-LOT DEVELOPMENT AND DEPICTED FRONTAGE / UTILITY WORK

UPDATED SURFACE TAKEOFF / LOT-WIDE WATER-QUALITY SCREENING

ITEM	LOT 1	LOT 2
Depicted impervious area	1,689.3 SF	1,663.5 SF
Impervious / recorded lot	17.60%	20.77%
WQv screening, P = 1 inch	166.7 CF	158.1 CF

Lot-wide screening only; see dossier page 7 for assumptions and calculation basis. Final tributary and ESD design pending.

SOILS - AeB: ADELPHIA-HOLMDEL-URBAN LAND COMPLEX, 0 TO 5 PERCENT SLOPES

COMPONENT HSG	DRAINAGE CLASS	HYDRIC	K FACTOR
B/D	Somewhat poorly drained	No	0.24
C	Moderately well drained	No	0.37
D	Not reported	No	Not reported

Mapped component properties; site-specific infiltration and groundwater investigation governs facility design.

ABBREVIATIONS

PUE - Public Utility Easement; IPF - Iron Pipe Found; BRL - Building Restriction Line; W / WHC - Water House Connection; S / SHC - Sanitary House Connection; ESD - Environmental Site Design; LOD - Limit of Disturbance. Plat notation: For Public Water and Sewer Only.

GRADING CERTIFICATE - PROFESSIONAL EXECUTION REQUIRED

I HEREBY CERTIFY THAT THIS PLAN CONFORMS TO THE REQUIREMENTS OF SUBTITLE 32, DIVISION 2 OF THE CODE OF PRINCE GEORGE'S COUNTY WATER RESOURCES PROTECTION AND GRADING CODE; AND THAT I OR MY STAFF HAVE INSPECTED THIS SITE AND THAT DRAINAGE FLOWS FROM UPHILL PROPERTIES ONTO THIS SITE, AND FROM THIS SITE ONTO DOWNHILL PROPERTIES, HAVE BEEN ADDRESSED IN SUBSTANTIAL ACCORDANCE WITH APPLICABLE CODES. SIGNED, SEALED AND DATED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF MARYLAND.

RESPONSIBLE PROFESSIONAL / APPLICANT

OWNER / APPLICANT / CONTACT

DESIGNER / ADDRESS / PHONE

CHECKER / DATE

PROFESSIONAL SIGNATURE / SEAL / LICENSE / EXPIRATION

PORTER SUBDIVISION - LOTS 1 & 2

1005 & 1009 ROLLINS AVENUE
PRINCE GEORGE'S COUNTY, MARYLAND
C-001 | SITE DEVELOPMENT / FINE GRADING
REVISION 5 - 10 SEPTEMBER 2026
PRELIMINARY - NOT FOR CONSTRUCTION

SITE DATA - RECORDED AREAS

ITEM	LOT 1	LOT 2
Recorded lot area	9,598 SF	8,008 SF
Frontage	65.00 ft	134.64 ft
Dwelling footprint	1,196 SF	1,196 SF
Dwelling / lot	12.46%	14.94%

Net lots: 17,606 SF. Public dedication: 4,219 SF. Gross recorded tract: 21,825 SF. PM 231 / 50; Tax Map 73, Grid B3. Zoning RSF-65. Footprint ratios exclude other structures and projections.

MEASURED FOOTPRINT CLEARANCES

YARD	LOT 1	LOT 2
Front	31.00 ft	30.30 ft
Sides	8.10 / 10.90	11.10 / 8.15
Rear	62.49 ft	See yard review

Design criteria: front 30 ft; side 8 ft; Lot 1 rear 20 ft. Lot 2 triangular-yard classification requires zoning determination. Dimensions apply to the depicted dwelling footprint; coordinate all building projections.

NOTES OF RECORD - COMPLETE

- Development of this property shall be in accordance with the approved Stormwater Management Concept Plan 41230-2006-00, or any approved revisions thereafter.
- Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4916 Z 08 commitments.
- The applicant, his heirs, successors and or assignees shall utilize an abutting driveway design, constructed per DPW&T standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue, if deemed appropriate by DPW&T upon the issuance of street construction permits.

GENERAL AND CONSTRUCTION NOTES

- Boundary reference: Porter Subdivision, Lots 1 and 2, Plat Book PM 231, page 50. Horizontal basis NAD83. Existing contour interval 2 ft, vertical datum NAVD88.
- Secure applicable permits and approved construction documents before work. Locate utilities and verify utility depths before excavation. Coordinate finished floors, site grades and service inverts with the approved engineering design.
- Install approved construction access and sediment controls before clearing. Maintain controls during construction. Protect stormwater facility areas from sediment and compaction; stabilize contributing areas before placing facilities in service.
- Complete permanent stabilization and frontage work; remove temporary controls after inspector authorization. Tie frontage construction to existing line and grade.
- Water and sanitary routing is preliminary. Recorded easements are the project basis. Coordinate the WSSC junction geometry, service separation and profiles. County details and the source connection sketch appear on this sheet.
- The 46 x 26 dwelling footprint includes the 10-foot one-car garage. Rear basement areaways: 13 x 4 ft per Kingsworth. Lot 2 is shifted 0.70 ft toward Rollins Avenue. Coordinate basement plumbing and final veneer projections.

STANDARD STABILIZATION NOTE

Following initial soil disturbance or re-disturbance, permanent or temporary stabilization must be completed within: a.) Three (3) calendar days as to the surface of all perimeter dikes, swales, ditches, perimeter slopes, and all slopes steeper than 3 horizontal to 1 vertical (3:1); and b.) Seven (7) calendar days as to all other disturbed or graded areas on the project site not under active grading.

DISTURBANCE AND SUPPORTING INFORMATION

Proposed work-limit union: 19,171 SF. Lot 1: 9,598.5 SF; Lot 2: 8,008.8 SF. Work-limit takeoff includes depicted offsite work; coordinate final limits with approved ESC, utility, frontage and conservation documents.

Supporting dossier: recorded conditions and adjoiners, soils data, source references, quantity basis and the application completion worksheet. Stormwater facility labels show preliminary locations and footprints.

REVISION RECORD


REV.	DATE	DESCRIPTION	BY
2	09/09/26	Areaways, leadwalks and record coordination	
3	09/10/26	Updated surface takeoff and drainage screening	
4	09/10/26	Information-block dividers and graphical legend	
5	09/10/26	Revision record added; professional fields relocated	

SITE PLAN LEGEND - LINES AND SYMBOLS

	Property / lot line		Public utility easement
	Adjoining parcel		Private utility easement
	Building restriction (BRL)		Disturbance limit (LOD)
	Existing contour - minor		Proposed dwelling
	Existing contour - index		Paving / walks / stoops
	Water service (W)		Proposed tree
	Sanitary service (S)		ESD facility footprint

AW = basement areaway. ESD locations are preliminary.
See ABBREVIATIONS for additional plan terminology.


CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

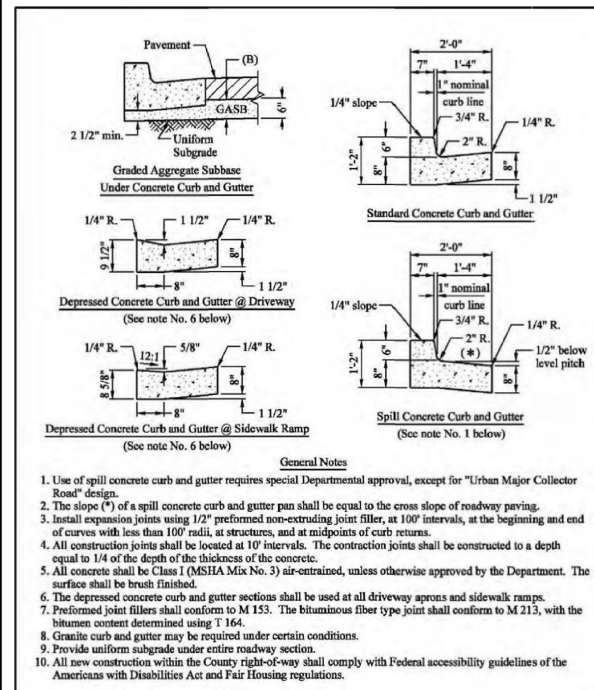

APPROVED	DATE	DESIGNED BY	CHECKED BY

Version 09/19/12
Specification and Standards for Roadways and Bridges
Section 8 - 61
REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.


CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

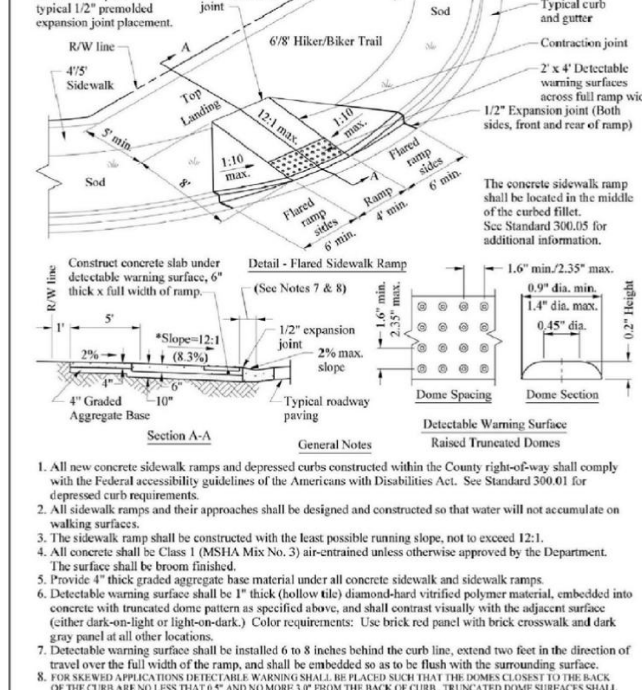

APPROVED	DATE	DESIGNED BY	CHECKED BY

Version 09/19/12
Specification and Standards for Roadways and Bridges
Section 8 - 61
REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

WATER & SEWER CONNECTION SKETCH — RECORDED — SCALE 1" = 60'

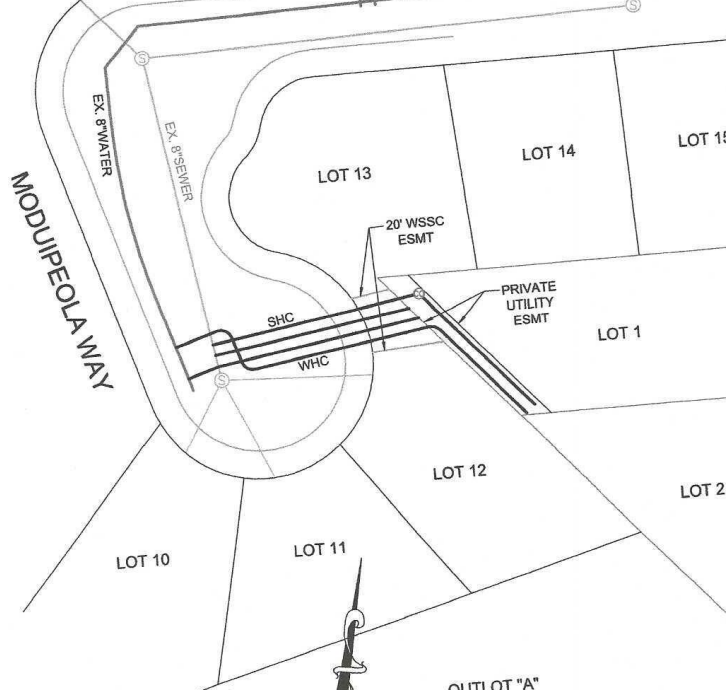

APPROVED	DATE	DESIGNED BY	CHECKED BY

Version 09/19/12
Specification and Standards for Roadways and Bridges
Section 8 - 61
REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

GRAPHIC SCALE — 1" = 20'
0 20 40 60 80 FEET