

Bachelorarbeit

**Design and Implementation of a Distributed, Low-Power,
Signal Strength Measurement System**

Jan Nauber
Matrikelnummer: 3003433



Networked Embedded Systems Group
Institut für Informatik und Wirtschaftsinformatik
Fakultät für Wirtschaftswissenschaften
Universität Duisburg-Essen

February 6, 2017

Erstprüfer: Prof. Dr. Pedro José Marrón
Zweitprüfer: Prof. Dr. Torben Weis
Zeitraum: 18. November 2016 - 10. Februar 2017

Contents

1	Introduction	3
1.1	Motivation	3
1.2	Problem definition	3
1.3	Bachelor Thesis Structure	4
2	Materials and Methods	5
2.1	Wireless Sensor Networks	5
2.2	Radio Tomographic Imaging	5
2.3	Multi-Spin	6
2.4	Testbed	7
2.4.1	TelosB Mote	8
2.4.2	TinyOS	8
3	Approach	13
3.1	General Structure	13
3.2	Calibration	15
3.3	Collection	15
3.4	Creating the Schedule	17
3.4.1	Rooted Circles	17
3.4.2	Creating a Full Schedule	18
3.5	Spreading the Schedule	20
3.5.1	Sampling	21
3.5.2	Message Drops	21
4	Implementation	25
4.1	General Structure	25
4.2	Receiving and Storing Information at the Base Station	28
4.3	Calibration	28
4.4	Collection	30
4.5	Creating the Schedule	32
4.6	Spreading the Schedule	32
4.7	Sampling	33
5	Evaluation	37
5.1	Experiment Setup	37

Contents

5.2	Experiment Night	37
5.3	Experiment Day	40
5.4	Assessment	42
6	Discussion	43
6.1	Comparison to a Timeslot Based Approach	43
6.2	Possible Improvements	43
7	Acknowledgements	45
	Bibliography	47

Abstract

The function of the abstract is to summarize, in one or two paragraphs, the major aspects of the entire bachelor or master thesis. It is usually written after writing most of the chapters.

It should include the following:

- Definition of the problem (the question(s) that you want to answer) and its purpose (Introduction).
- Methods used and experiments designed to solve it. Try to describe it basically, without covering too many details.
- Quantitative results or conclusions. Talk about the final results in a general way and how they can solve the problem (how they answer the question(s)).

Even if the Title can be a reference of the work's meaning, the Abstract should help the reader to understand in a quick view, the full meaning of the work. The abstract length should be around 300 words.

Abstracts are protected under copyright law just as any other form of written speech is protected. However, publishers of scientific articles invariably make abstracts publicly available, even when the article itself is protected by a toll barrier. For example, articles in the biomedical literature are available publicly from MEDLINE which is accessible through PubMed. It is a common misconception that the abstracts in MEDLINE provide sufficient information for medical practitioners, students, scholars and patients[citation needed]. The abstract can convey the main results and conclusions of a scientific article but the full text article must be consulted for details of the methodology, the full experimental results, and a critical discussion of the interpretations and conclusions. Consulting the abstract alone is inadequate for scholarship and may lead to inappropriate medical decisions[2].

An abstract[?, ?, ?, ?] allows one to sift through copious amounts of papers for ones in which the researcher can have more confidence that they will be relevant to his research. Once papers are chosen based on the abstract, they must be read carefully to be evaluated for relevance. It is commonly surmised that one must not base reference citations on the abstract alone, but the entire merits of a paper.

Chapter 1

Introduction

1.1 Motivation

Wireless Sensor Networks (WSN) are an emerging technology that enables a lot of different applications for environmental and habitat monitoring, analysis of structures, or localization and tracking. In the field of localizing and tracking the Radio Tomographic Imaging (RTI) was developed. It is a localization technique that analyses the signal strengths between nodes inside a WSN making it possible to localize and track a person without it carrying a device. To do this a system that measures the signal strengths between every node inside a system is needed. Such a system already exists, but it assumes that all the nodes of the WSN can hear each other. This restricts the possibilities of monitoring large areas where it is not possible any more that all the nodes inside the WSN can hear each other creating the need for a new approach that makes the measurement of the signal strength in a distributed WSN possible.

1.2 Problem definition

To measure the signal strength nodes the nodes need to send messages on the basis of which the signal strength can be measured. The problem is that two messages sent at the same time can collide and distort the measured signal strength. This makes procedure necessary that schedules all the nodes inside the WSN in such a way that only one node sends a message at a given point in time. Moreover to get a full dataset of all the signal strength the measured data from each node need to be collected at a central point making RTI localization possible.

The goal of this thesis is to develop an approach that schedules the nodes message sending in a way that no two or more nodes send at the same time, measures the signal strength and collects the data at a central point to make localization with RTI possible. The system should be self calibrating and usable at any given WSN.

1.3 Bachelor Thesis Structure

First this thesis will give an overview about Wireless Sensor Networks, Radio Tomographic Imaging, the existing signal strength system and a Wireless Sensor Network that is located at the University Duisburg-Essen and used to test the developed approach. Then the developed approach for a signal strength measurement system working in every WSN is explained. Next it will be explained how the developed approach can be implemented. After that the developed system will be evaluated. Lastly there will be a discussion.

Chapter 2

Materials and Methods

2.1 Wireless Sensor Networks

A Wireless Sensor Networks (WSN) is a collection of small, low-cost, low-power sensor nodes that do not only have sensing capacities but also computing capacities. Additionally these nodes are able to communicate with each other via a wireless medium. Such a WSN deployed in an area of interest makes it possible to monitor the area in a desired way enabling applications for environmental and habitat monitoring, analysis of structures, or localization and tracking.

The typical architecture of a WSN includes one node that functions as the sink. This means that this node is the connection to a PC or the Internet to bring the informations collected by the nodes to the user. All the nodes then are spread over the area of interest. When placing the nodes it is important that each node can somehow communicate with the sink, may it be a direct connection or a indirect over other nodes. Are all the nodes in direct range of each other it is a single hop network meaning each node can transmit a message directly to all the other nodes. Otherwise the network is called multi hop. This means nodes can not necessary transmit messages directly to all the other nodes but may need to transmit the message over other node that forward it to the destination.

The application running on the node is designed specific for the purpose of the WSN. Since the nodes should operate independent they are often powered by battery. This makes power one of the constrains of a WSN and applications need to be designed to have a low power consumption. Moreover the the application designed for the nodes needs to take the constrains of low computation capability and low storage of the sensor nodes have into account. [Somb] [LMP⁺]

2.2 Radio Tomographic Imaging

Radio Tomographic Imaging (RTI) is a method to localize people inside an area covered by a WSN. To do so, the WSN monitors the received signal strength (RSS) of each link

inside the network by letting each node send broadcast messages over radio. Whenever a person stays or moves inside the monitored area, it affects RSS of some or all links. The changes can then be processed and a position of the person can be estimated. This makes it possible to localise a person without it having to carry any device [BKP].

2.3 Multi-Spin

When monitoring the RSS of each link inside a WSN it is important to take into account that not only changes inside the environment can effect the RSS. Also multiple messages sent at the same time interfere with each other and distort the measured change of the RSS. To counteract this a method to schedule the messages in a way that only one node sends at a given point in time is needed. The literature suggest the Multi-Spin algorithm that defines for each node a point in time when it should send its message.

In Multi-Spin time is divided into *slots* and *cycles* where a *cycle* is the time all the nodes need to send one message each. Then a *cycle* is divided by the number of nodes inside the network resulting in one *slot* for each node, shown in Figure 2.1. Now each node sends in one of these slots. The order in which the nodes send is defined by their ID. To make this possible the nodes need to somehow synchronize at the beginning. Therefore each node sends messages. When the first message is received the nodes synchronizes themselves with that message and start sending in the order of their IDs. Whenever a node receives a message it can calculate the time until the next *cycle*, so the nodes stay synchronized all the time. [BKP]

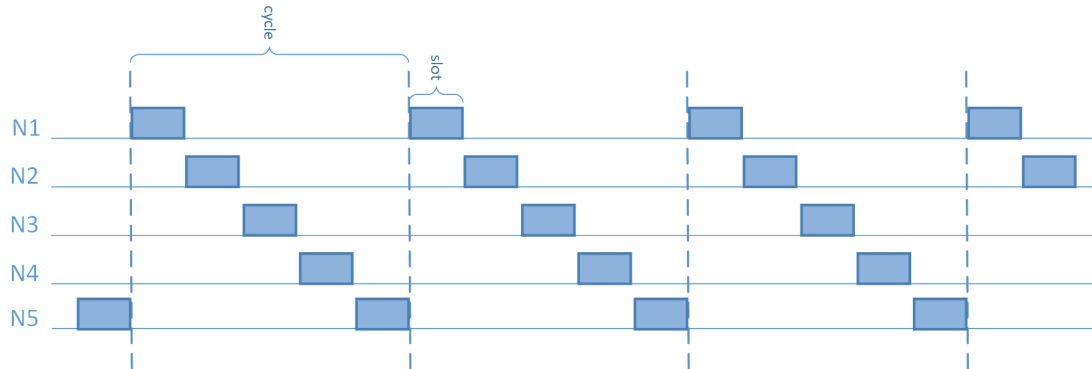


Figure 2.1: Time is divided into *slots* and *cycles*. A *cycle* is the time all the nodes need to send their message. A *cycle* then divided by the number of nodes to create a *slot* for each node where it can send its message. [BKP]

For the collection of the RSS measurements a extra node that overhears all the messages is connected to a PC. The nodes include their ID and the last RSS measurements inside

their messages. The extra node now receives the messages from all the other nodes and forwards them to the PC. [BKP]

This method is really fast, efficient and stable. However it only works under the assumption that all the nodes can hear each other. When not all the nodes hear each other the synchronization would not be that accurate making it necessary to resynchronize for each *cycle*. Moreover the data collection does not work at all since there is no node that is able to hear all the other nodes and therefore collect the information by simply listening to the send messages. Therefore a different method is needed for a widely spread multi hop network.

2.4 Testbed

The Testbed is a WSN located on the third floor of the SA building at the University of Duisburg-Essen. It is set up as a tool for researches on WSNs in an indoor environment. It covers half of the building including a large main corridor, two laboratories, two smaller corridors leading to three offices each, seven smaller storage rooms and one server room. The arrangement of the rooms is laid out in Figure 2.2. All in all the area covers $531 m^2$. All the rooms are in daily use by the people working in the offices and the laboratories, keeping the area under constant change.



Figure 2.2: Floor plan of the area where the Testbed is located. The position of the nodes is shown by the numbered antennas.

To monitor the area 32 nodes are distributed over the rooms like shown in Figure 2.2. The nodes are only placed inside the offices and laboratories and are not always placed at

the same hight. To make programming of the devices easy all the devices are connected to Raspberry Pies via USB. A script then makes it possible to copy the source code to all the Raspberry Pis where the code is compiled and then sent to each node individual. The connection to the Raspberry Pies makes it also possible to collect information directly from each node individually over serial forwarder running on the Raspberry Pies.

2.4.1 TelosB Mote

The sensor nodes used for the Testbed are Crossbow's TelosB Motes TPR2420. The TPR2420 is an open source platform for researchers developed by the University of California, Berkeley. It provides an 8 MHz Texas Instrument MSP430 low power microcontroller with 10kB RAM that is programmable via a USB connector. For communication it includes an IEEE 802.15.4 compliant radio frequency transceiver with an embedded antenna. This makes transmissions in a frequency band from 2.4 to 2.4835 GHz possible. Moreover the TPR2420 has a light sensor, an infra-red sensor, a humidity sensor and a temperature sensor installed making it possible to monitor the environment. Last it has three LED lights installed that can be used for visual output of the mote. The USB connector that can be used to program the microcontroller can also be used to exchange data with and to power the TPR2420. If it is not connected via USB it can also be powered by two AA batteries. [CT]

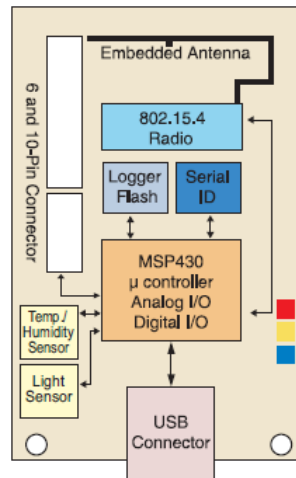


Figure 2.3: The structure of the TPR2420 and the included components [CT]

2.4.2 TinyOS

TinyOS is an operating system for embedded systems, designed to manage the limited resources and power and to provide reactive concurrency and flexibility. It is widely used

by multiple research groups and companies world wide to support their applications.

The main task of TinyOS is to schedule tasks and events to provide safe concurrent operations. Additionally it also provides a large amount of reusable system components, like timers, sender or receiver, that provide a huge variety of functionalities. When compiling an application only the TinyOS components that are used inside the application are included into the application creating an application-specific OS.

To provide functionality each component can have three different types of computational abstractions. First there are commands making it possible for other components to call a functionality of the component providing the command. Then there are events which can be signalled by a component. A component receiving the event can then react to it and act accordingly. These two constructs make interaction between components possible. Last, for component intern functionality there are tasks. These can be posted by a component and then are executed when its their turn.

Whenever a command, event or task gets called it is pushed into the queue of the TinyOS scheduler. The scheduler then executes the tasks inside the queue using a FIFO scheduling policy. [LMP⁺]

2.4.2.1 Programming for TinyOS

Applications for TinyOS are written in nesC which is a C dialect and integrates the possibility to implement configurations, modules, interfaces, commands, events and tasks. An application consists of components, represented by a nesC module, that provide and use interfaces. The components implement the functionality of the application. All the commands and events a component provides are defined by an interface. Moreover an application for TinyOS also has a configuration that defines which components are connected.

The Listings 2.1, 2.2 and 2.3 show an example application for TinyOS with two components of which one provides an interface and the configuration for the application. This example shows the connections between components, interfaces and the configuration and also shows the use of commands, events and tasks. In Listing 2.1 the two components *MainComponent* and *ExampleC* are represented. *MainComponent* uses two interfaces. The first one is the *Boot* interface. It requires the component to implement the *Boot.booted()* event. This event is the first event signalled by TinyOS after the node booted. Moreover the *MainComponent* uses the *ExampleI* interface that is defined in Listing 2.2. It requires the component to implement the *exampleDone(error_t error)* event. The *ExampleI* interface is provided by the *ExampleC* component and requires it to implement the *startExample()* command. Moreover the *ExampleC* component implements a task *doSomething()*.

Now to connect everything the configuration *Application* in Listing 2.3 first calls all the components needed for the application. The first component used in this application is the *MainC* component that provides the *Boot* interface and is given by TinyOS. Next there are the two components from Listing 2.1. Now the configuration needs to connect the interfaces of the components to the components providing the corresponding interfaces. This means *MainComponent.Boot* gets connected to *MainC* and *MainComponent.ExampleI* gets connected to *ExampleC*.

When a device would get programmed with this example the first thing that would happen is that *MainC* signals *Boot.booted()* event resulting in executing the code for the event inside *MainComponent*. This code calls the *ExampleI.startExample* command. Since the interface is connected to the *ExampleC* the corresponding code posting the *doSomething()* task gets executed. Then at the end of *doSomething()* the *ExampleI.exampleDone(...)* gets signalled by *ExampleC*. This means the event gets triggered in *MainComponent* and the corresponding code gets executed. [LMP⁺] [Soma]

Listing 2.1: Two example components. *MainComponent* uses the example interface from 2.2 and the interface *Boot* that TinyOS provides. *Boot* requires the *MainComponent* to implement the *Boot.booted()* event that is the first event that gets signalled by TinyOS after the node booted. The *ExampleC* provides the example interface and therefore needs to implement the event and also implements a task *doSomething()*.

```
module MainComponent {
  uses interface Boot;
  uses interface ExampleI;
} implementation {
  event void Boot.booted() {
    call ExampleI.startExample();
  }

  event void ExampleI.exampleDone(error_t error) {
    if(error == SUCCESS) {
      //some task...
    }
  }
}

module ExampleC {
  provides interface ExampleI;
} implementation {
  task void doSomething() {
    //some task...
  }
}
```

```
    signal ExampleI.exampleDone(SUCCESS);
}

command void startExample() {
    post doSomething();
}
}
```

Listing 2.2: Example interface providing a command *startExample()* and an event *exampleDone()*.

```
interface ExampleI {
    command void startExample();
    event void exampleDone(error_t error);
}
```

Listing 2.3: The configuration *Application* links all the Components

```
configuration Application {
} implementation {
    components MainC;
    components MainComponent
    components ExampleC;

    MainComponent.Boot -> MainC;
    MainComponent.ExampleI -> ExampleC;
}
```

Since whenever a task, command or event gets called it is not executed directly but gets added to the queue of the TinyOS scheduler. This means that all the tasks, commands or events called before execute first including the currently running one.

Chapter 3

Approach

This chapter explains the general structure and functionality of a system that is supposed to measure the received signal strength(RSS) of every link in a multi-hop Wireless Sensor Network (WSN). First, the chapter gives an overview of the general structure of the system. Then each individual task of the system gets explained in detail.

3.1 General Structure

To measure the received signal strength (RSS) of each link all the nodes need to send messages. Since two nodes sending a message at the same time distorts the RSSI measurements we need to make sure that only one node sends a message at a given point in time. One approach to achieve this is the multi-spin method explained in Chapter 2.3. However this method does not work inside a multi-hop WSN. This makes a different approach that schedules the nodes and collects the data from the WSN necessary. A similar approach that also uses timeslots but includes would come into mind. However a problem with such a timeslot based system is that when using a platform like TinyOS, where no full control over the execution of events and tasks is given, timeslots can not be defined completely accurate meaning the timeslots need to include an error that takes into account that a receive event dose not necessarily gets triggered when the message was received.

To eliminate the delay timeslots bring along a different approach is suggested in this thesis which is based on predefined predecessors for each node. Based on this each node is able to send a message directly after receiving a message from its predecessor and at the same time making sure that only one node sends at a given point in time. Moreover each measurement *cycle* is divided into a sampling and a collection phase making it possible for the approach to be used inside a multi-hop WSN.

The approach requires a WSN in which one node functions as the sink. The sink is connected to a base station with high processing power and a lot storage. The structure of the WSN is represented in Figure 3.1a. Since the requirement for the approach is that it works inside a multi-hop WSN it is a challenge to collect data from the network and

to create a fitting schedule that defines predecessors for all the nodes inside the network. To be able to do so a first calibration phase is needed to create paths from every node to the sink and collect information about the connections between nodes. Then the information about the connections need to be collected at the sink and sent to the base station in a collection phase. When the base station received all the information it can create the schedule. After that the base station has to send the schedule to the sink that starts spreading it inside the network.

Is the schedule spread and all the nodes know when to send their messages, the sampling of the RSSI can start. Therefore messages are sent according to the predecessors defined in the schedule. All the nodes receiving the messages are now able to measure the received signal strength to the sending node and store this information. When the schedule is completed another collection of the data is needed to gather the measured RSSI at the base station for further processing. When the collection is done, the system can start sampling again and then again collect the data until the system is stopped. This process is shown in Figure 3.1b.

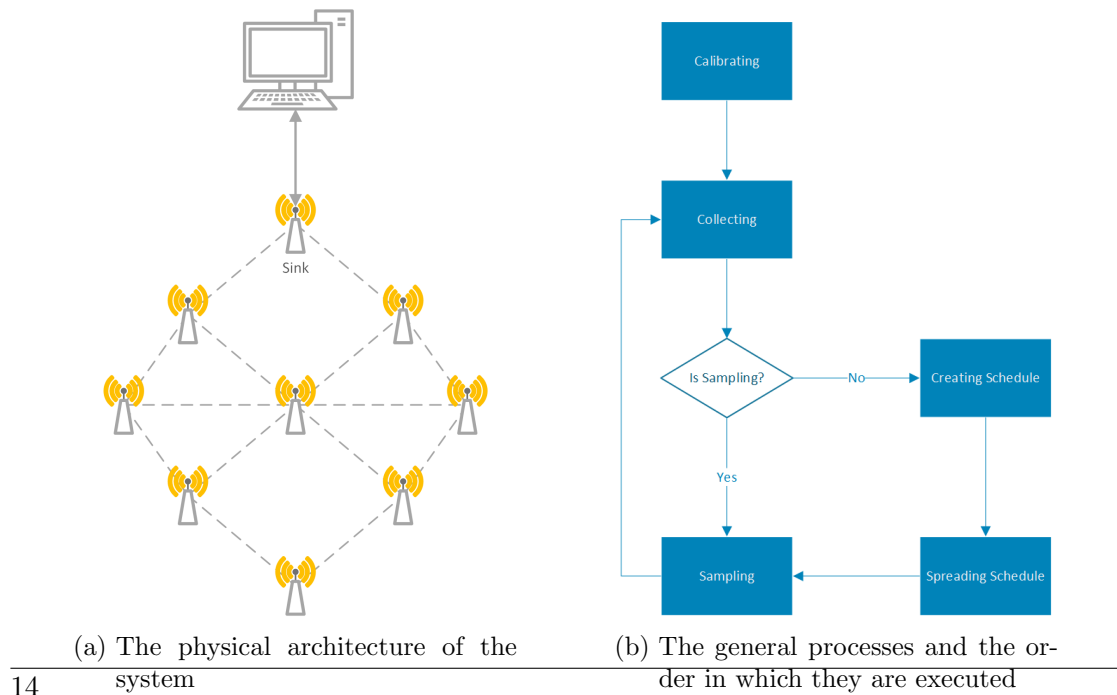


Figure 3.1

3.2 Calibration

The calibration has two tasks. It needs to figure out for each node individually which nodes a node has in its range and it needs to create paths to the sink. These paths are used later to send data to the sink and to spread information inside the network. To achieve these tasks each node broadcasts multiple messages without any specific pattern, meaning they do not need to take into account that messages can collide.

Each node needs to be able to keep track of the nodes in range. Therefore each node needs to have its own neighbour table. When a node receives a message it can put the node it received the message from inside that neighbour table. All the neighbour tables will later be the basis to create the schedule.

To later collect data from each individual node at the sink, each node needs to know to which node it needs to send its data to so it will reach the sink. This node is the parent of the node. Moreover to spread data inside the network each node also needs to know which nodes send to itself in direction of the sink. These nodes are the children of a node. When each node found its parent and its children all the paths together form a tree structure with the sink as the root.

To find the parents for the nodes each node needs to save one extra information and also include this information inside the messages it sends. This information is the quality of the current path a node has to the sink. At the beginning all the nodes except the sink initialize their path quality with the worst possible value. The sink initializes its path quality with the best possible value. Now when a node receives a message it adds to the received path quality of the sending node the quality of the link between itself and the sending node. The result is the path quality to the sink for the node, when it choose the sending node as its parent. The quality of a link is represented by the received signal strength. When the new path quality is calculated the node compares the calculated value with its current path quality. If the calculated value is better the node sets its parent to the sending node and save the new path quality.

Now, to not only know the direction to the sink but also the direction going away from the sink the nodes need to find their children. Therefore each node simply includes their own parent inside the message it sends. A receiving node checks if it is the parent of the sending node. If that is the case the receiving node can save the sending node as a child.

3.3 Collection

To collect the data from the network, we make use of the created paths and their tree structure. The process is shown in Figure ???. The Figure shows a wireless sensor

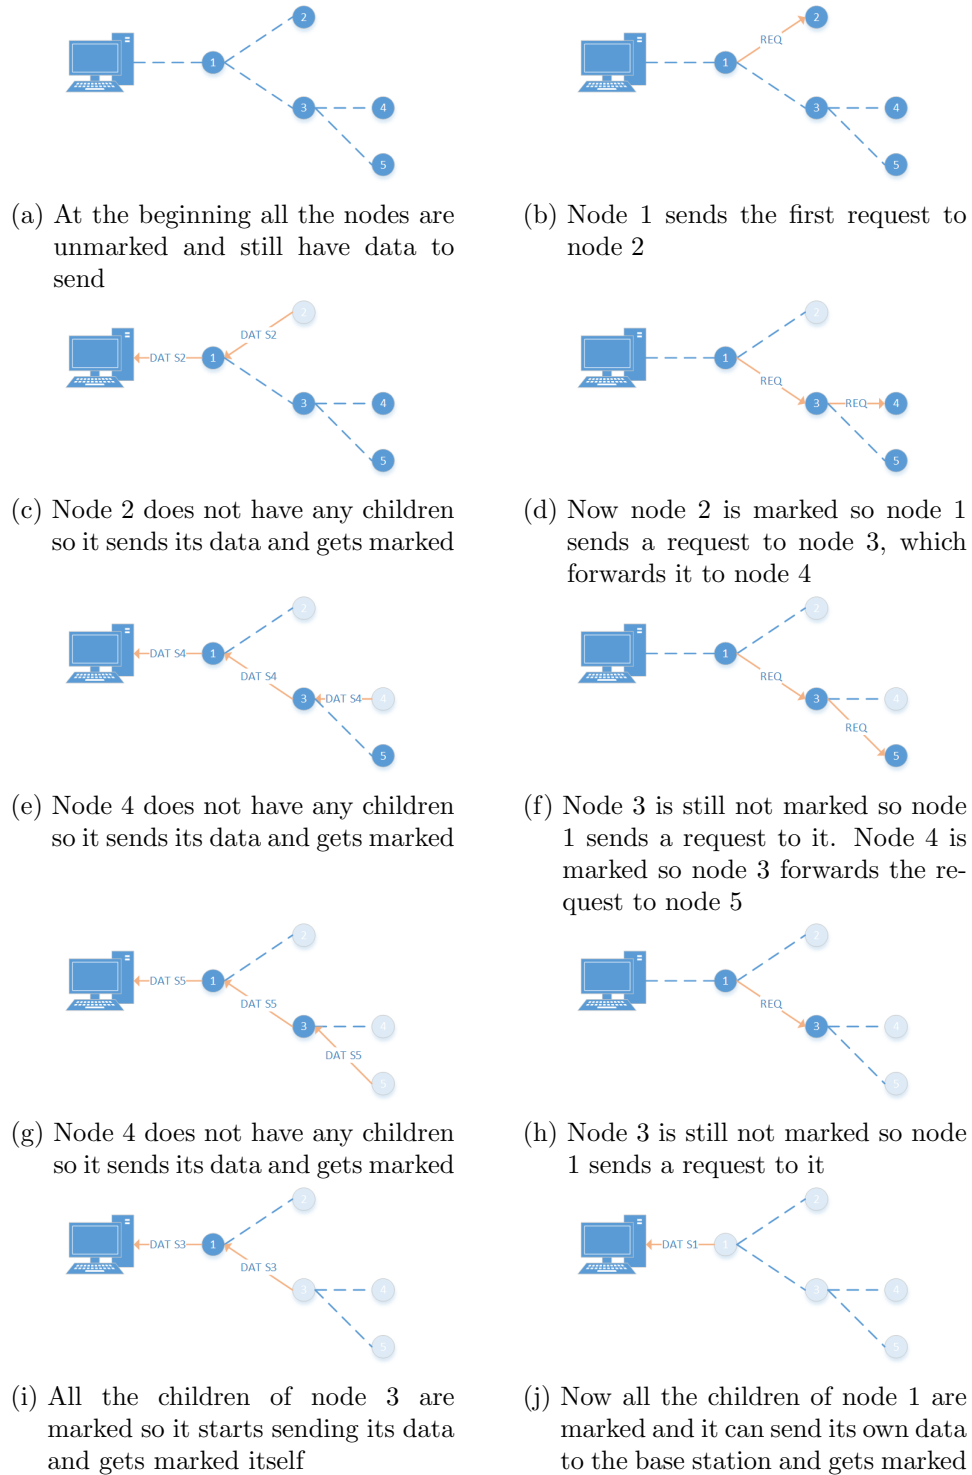


Figure 3.2: This is an example for the collection. REQ means request and DAT Sx stands for data from source x

network represented by the nodes and the paths to the sink created in the calibration phase. Note that the nodes could also have other connections between each other.

To start the collection the sink sends a request to one of its children. The child receiving that request checks if it has any children himself and if that is the case, it forwards the request to one of them. When the request reaches a node without any children, the node sends its data to its parent which forwards the data to its parent, until the data reaches the sink, which forwards it to the base station. Every node that receives a data message locally marks the source node of that data as done. When the sink sent the received data to the base station, it sends a new request to one of its children that has not been marked as done. That child again forwards that request to a child that has not been marked as done. If the request reaches a node that has no children or every child has been marked as done it sends its own data. This process will be repeated until the sink does not have any more children left that are not marked as done. Then the sink can send its own data to the base station and finish the collection. All nodes now need to unmark all the other nodes, so another collection is possible.

3.4 Creating the Schedule

A fitting schedule is a path through the graph structure of the WSN that visits every node at least once and starts and ends at the same node. The schedule needs to form a circle because the sink needs to collect the data after each round the schedule took. This means the sink needs to know when every node send its message which is the case when it is the last node in the schedule. Since the sink also knows when the collection is done it makes sense that it starts the next round and therefore is also the first node of the schedule.

The optimal schedule would be a Hamilton-Circle that is a circle inside a graph that visits each node exactly once. To figure out if a Hamilton-Circle exists, there is however only the way to brute force all the possible combinations. This is highly inefficient and possibly we do not even get a result at the end. Therefore this thesis suggests a simple method that makes sure every node gets visited at least once and the path starts and ends at the same node. This method however is not able to create.

3.4.1 Rooted Circles

The suggested method is based on smaller circles inside the graph. These circles have a root node that is the start and the end point of the circle. All the nodes inside this circle are in range of the root of the circle. These circles will be called rooted circles. In Figure 3.3b such a rooted circle is represented inside the network depicted in Figure 3.3a. To create a rooted circle, one node needs to be chosen as the root. Then the

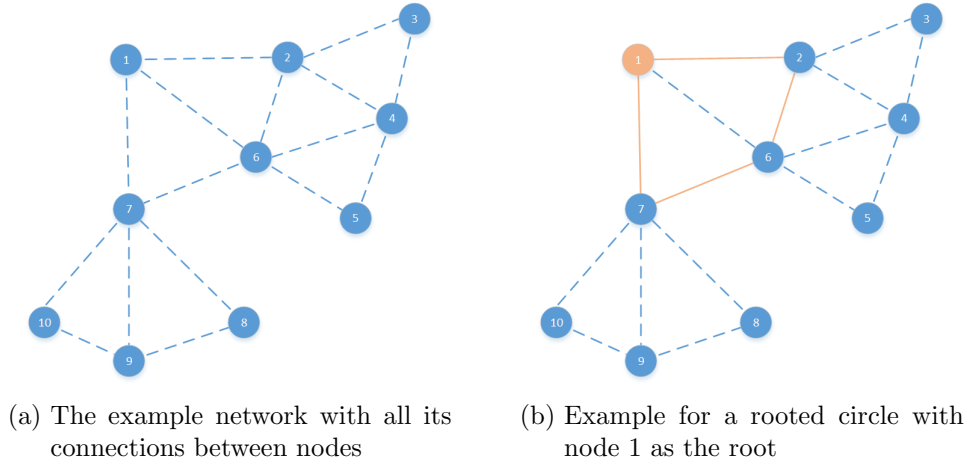


Figure 3.3: A rooted circle inside an example network

base station takes one node from the roots neighbour table and choose it as the second node in the circle. Then the base station looks into the second nodes neighbour table and choose a node that has the root node inside its neighbour table as the next node in the circle. The base station then does the same for the chosen node and this process is repeated until one node does not have a neighbour that has also the root as a neighbour. Then the circle is closed and the path goes to the root. When we look at the example in Figure 3.3b this means node 1 was chosen as the root. Then node 2 was picked as the second node in the circle. Node 2 has multiple neighbours but only one of them, node 6, has the root node 1 as a neighbour. This means node 6 is chosen as the next node in the circle. Node 6 now has node 2 and node 7 as neighbours that also have the root as a neighbour, however node 2 is already inside the circle so node 7 is chosen as the next node. Node 7 now has no more neighbours that have the root as a neighbour and the circle is closed.

3.4.2 Creating a Full Schedule

To create a full schedule the whole graph needs to be filled with rooted circles. Therefore the base station chooses the sink as the first root and create a rooted circle around it. When the circle is done, the base station goes through all the nodes of the circle and, if possible, create rooted circles around them as well. Then we do the same for all the new circles until every node was suggested as a root once. When creating new circles it is not possible to choose a node already inside another circle to be part of the new circle. In Figure 3.4 the network from Figure 3.3a is fully covered by rooted circles. The first circle created was the one that has node 1 as a root. Then all the nodes inside that circle were chosen as new roots to create new rooted circles. The first thing one

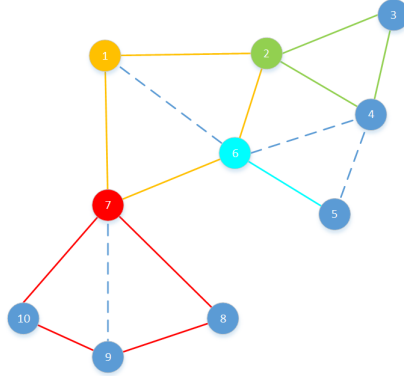


Figure 3.4: Full schedule for the example network of Figure 3.3a. The order in which the nodes send their messages would be: 1 2 3 4 2 6 5 6 7 8 9 10 7 1.

could notice is that the circle with the root 6 only has one other node and does not really form a circle. This happens if the circle is closed directly after the second node following the root is chosen because there are no more neighbours left that also have the root as a neighbour. When running the schedule, this means a message would be sent from node 6 to node 5 and then from node 5 back to node 6. Also note that in theory there is a bigger rooted circle possible with the root 6 when node 4 would be included, but node 2 created its rooted circle first and included node 4 and therefore blocked it for rooted circles created at a later point in time. Listing 3.1 provides the pseudocode of an algorithm to cover a whole graph with rooted circles.

Listing 3.1: Pseudocode that covers a graph with rooted circles

```
RootedCircle createRootedCircle(Node root) {
    Node node = getNextForCircle(root, root)

    If(node != null) {
        RootedCircle rootedCircle = new rootedCircle(root)
        rootedCircle.addNode(node)
        node.setPartOfCircle(true)

        while((node = getNextForCircle(root, node, rootedCircle)) != null) {
            rootedCircle.add(node)
            node.setPartOfCircle(true)
        }

        return rootedCircle
    } else {
        return null
    }
}
```

```

    }
}

Node getNextForCircle(Node root, Node neighbour) {
    for each (Node node in root.getNeighbourList)
        if (node.isNeighbourOf(neighbour) and not node.isPartOfACircle())
            return node
    return null
}

List<RootedCircle> coverGraphWithRootedCircles(Node firstRoot) {
    List<RootedCircle> circleList = new List<RootedCircle>()

    circleList.add(createRootedCircle(firstRoot))

    for each (RootedCircle circle in circleList) {
        for each (Node node in circle) {
            RootedCircle newCircle = createRootedCircle(node)
            if (newCircle != null)
                circleList.add(newCircle);
        }
    }
}

```

3.5 Spreading the Schedule

To spread the schedule we are again making use of the tree structure of the created path. When the sink received the schedule from the base station it forwards it to its first child. The child forwards it to one of his children and so on. When a node that received the schedule has no more children, it sends the schedule back to its parent. The parent receiving the schedule now forwards the schedule to its next child. If a parent received the schedule back from all its children, it forwards it to its own parent. In Figure 3.5 an example for this process is given. The Figure shows a wireless sensor network represented by the nodes and the paths to the sink created in the calibration phase. Note that the nodes could also have other connections between each other.

When looking at the example, one can see that already in Figure 3.5g the schedule is received by all the nodes but still there are messages sent that could seem useless at this point. However at this point in time it is not known if the sink has any more children that did not receive the schedule yet. Therefore the schedule needs to travel all the way back to the sink. Only at the moment the schedule reaches the sink and the sink

does not have any more children left that need to receive the schedule it is sure that the schedule is fully spread.

3.5.1 Sampling

When all nodes received the schedule it is possible to sample the received signal strength by sending messages according to it. Therefore the sink starts broadcasting a message. When its successor receives the message it can broadcast its own message and so on until the last message was send and the sampled data can be collected. However we need to take into account that we do not have a perfect schedule where every node only appears once, meaning a node could have multiple predecessors and successors. Therefore we need to include the successor of the sending node inside the message so a receiving node can see if he is the correct successor at that moment and evaluate the correct successor for itself.

3.5.2 Message Drops

A problem of the proposed method are message drops. If a successor does not receive the message of its predecessor the whole system would stop. Here a similar technique a timeslots based system uses comes in handy. For this method every node needs to know the whole schedule and not only its own predecessors and successors. Then whenever a node receives a message it can look up how many nodes need to send between the node that just send and itself. Than the amount of sending nodes is multiplied by the maximal time a node needs to send a message. The result is the time after the node can send its own message, without receiving a message from its predecessor. Again we need to take into account that a node can appear multiple times in the schedule. Therefore after a node send a message it needs to calculate the maximal time until it can send the next message.

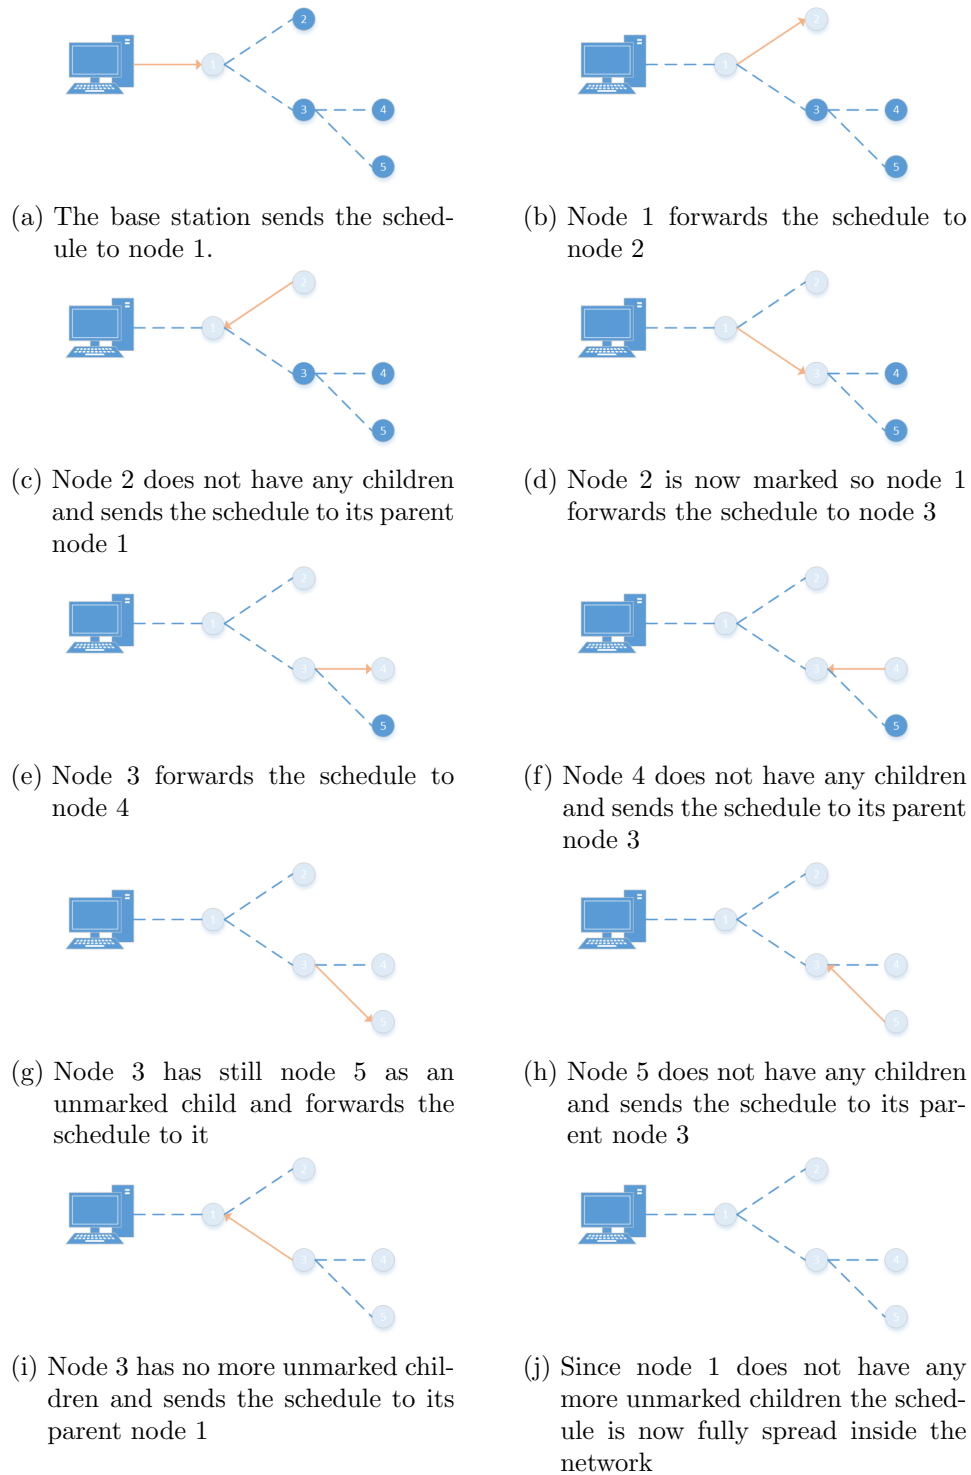


Figure 3.5: This is an example for a path a schedule message takes to be spread inside the network

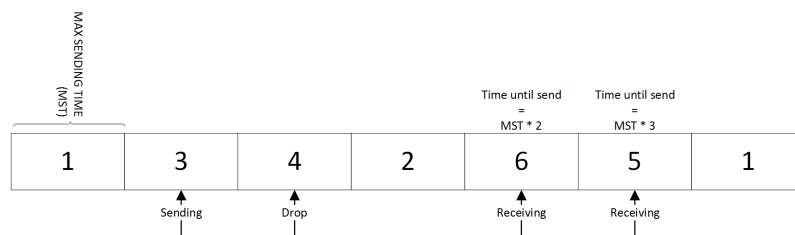


Figure 3.6: Representation of a schedule. Node 3 sends a message. Node 4 drops the message but node 6 and 5 receive it so that they can calculate the time when they should send

Chapter 4

Implementation

In this chapter a way to implement a system like the one described in Chapter 3 will be explained by an example based on TinyOS. First it will give you a general overview of the system's structure. Then the individual parts of the system are explained in more detail.

4.1 General Structure

The system is dividable into two main components. The base station, that stores and processes the data, and the nodes, that collect the data. Both parts of the system need their own hard- and software to complete their tasks.

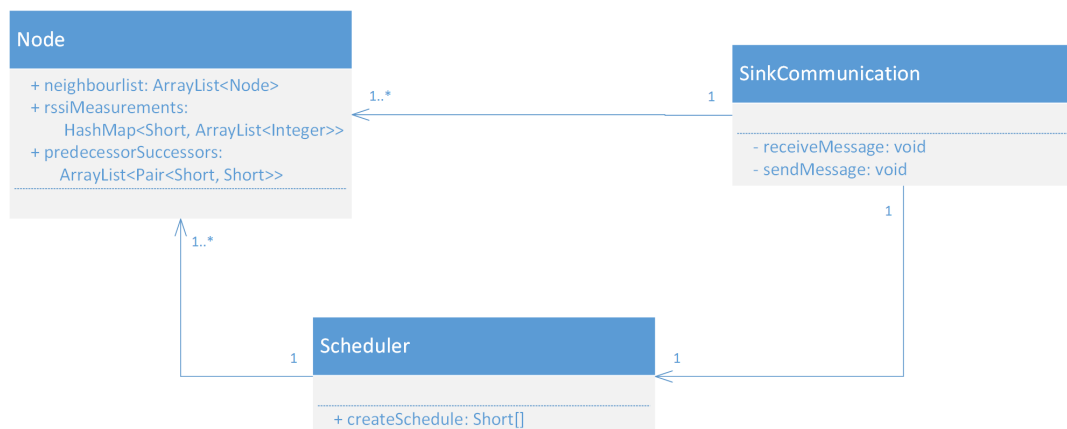


Figure 4.1: General structure and functionality of the base station

The base station can be a computer running a Java application connected to the sink via a USB-Cable. In Figure 4.1 you can see the general structure of the Java application with its classes and their basic functionality. First, there is the *SinkCommunication* class that handles the communication with the sink. It is responsible for receiving and

processing messages and to send messages to the sink. Then there is the *Node* class which stores all the information about one node. It stores the neighbours of the node, the measurements a node made and its predecessors and successors. The last class is the Scheduler that is responsible of creating a schedule based on the data saved in the node classes.

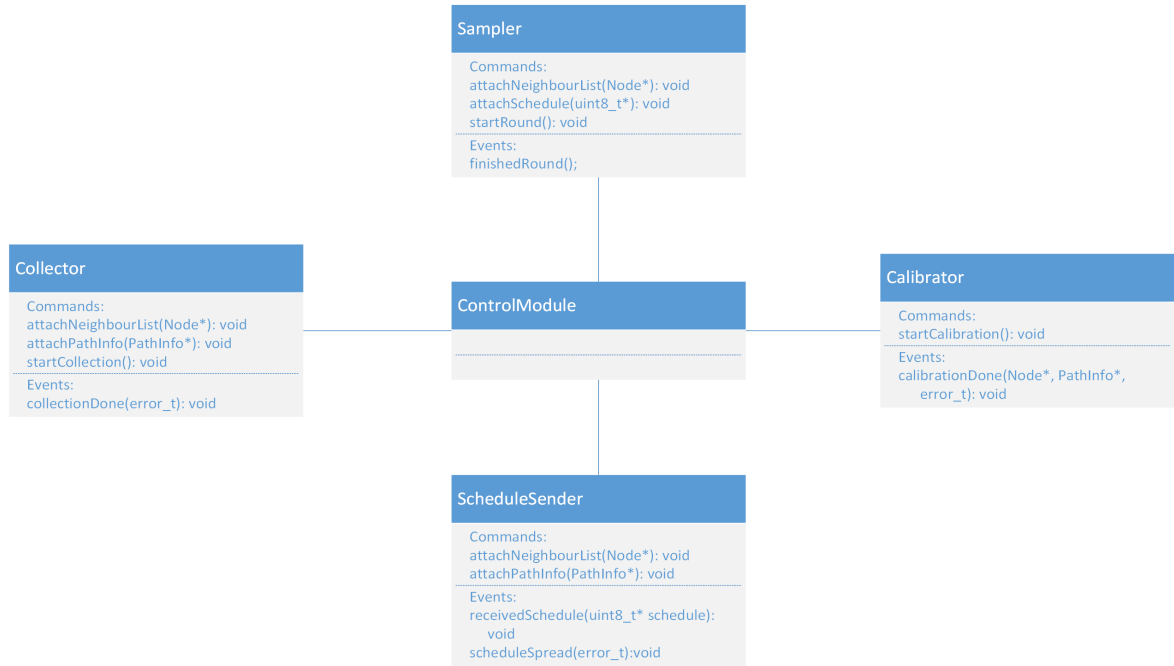


Figure 4.2: The interfaces each component provides. The *ControlModule* does only use all the other interfaces and does not provide one itself.

As nodes the TelosB motes described in Chapter x.y can be used. The application running on the nodes can then be written in NESC for TinyOS. Since the application running on the motes has multiple independent tasks it makes sense to create one component for each task. In Figure 4.2 the suggested structure is displayed, containing the components *Control*, *Calibrator*, *Sampler*, *ScheduleSender* and *Collector* represented by their provided interfaces.

The *Control* component connects all the other components and makes sure the informations the other components provide get delivered correctly to the component needing that information. Therefore it does not need an interface to provide functionality. The *Calibrator* components is responsible for the calibration of the network. It has the *startCalibration* command to start the calibration and the *calibrationDone* event that gets signalled when the calibration is done and provides the gathered informations. The *Collector* component covers the data collection. This component needs to know

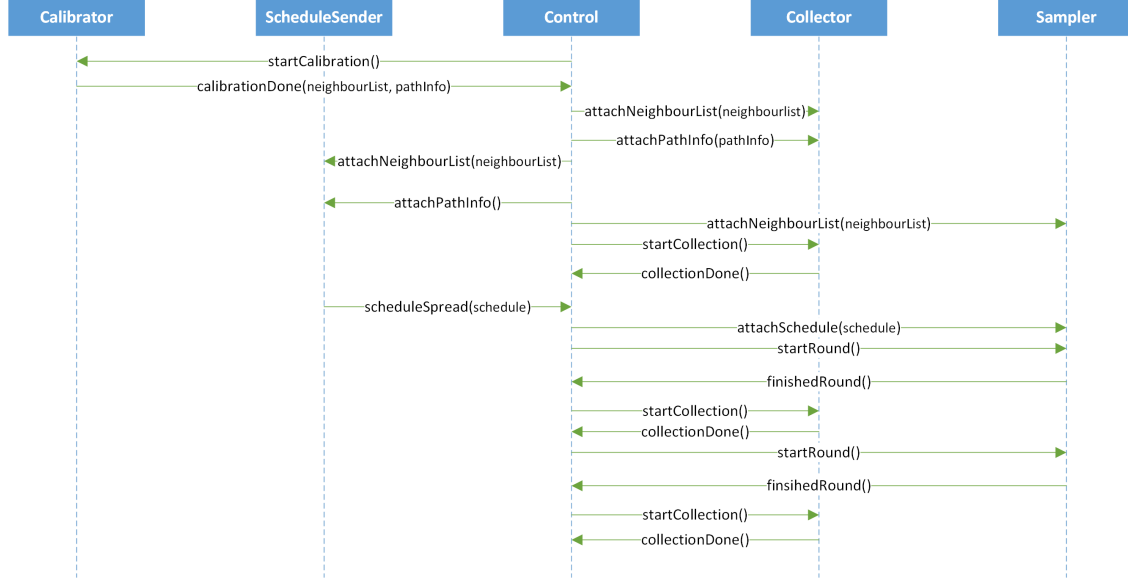


Figure 4.3: A possible order of commands and events.

the neighbours and the information about the node's parent and children. Therefore the interface of the components provides the two commands *attachNeighbourList* and *attachPathInfo* to attach this information to the component. The *Control* component can then simply attach the information to the *Collector* when the *calibrationDone* event triggers. Moreover the *Collector* component needs the event *collectionDone* the signal when the collection is done. To spread the schedule inside the network the application provides the *ScheduleSender* component. It also needs the information about the neighbours and the parent and children of the node and therefore has the same commands as the *Collector* to attach these informations. It does not necessarily need a command to start the spreading since it can directly react when the node receives a schedule message from the base station. Lastly the component has two events *receivedSchedule* and *scheduleSpread*. The component signals the *receivedSchedule* when the node received the schedule and also provides the schedule. When the schedule is spread the sink signals the *scheduleSpread* event. The last component is the *Sampler*. It needs the neighbour list and the schedule and therefore has the commands *attachNeighbourList* and *attachSchedule* to provide these to the component. Moreover it has the *startRound* command to start one round of the schedule and the *finishedRound* event that the component signals when this round is finished. Figure 4.3 represents a possible sequence of the commands and events.

4.2 Receiving and Storing Information at the Base Station

To receive and send messages from the sink it is possible to use of TinyOS Java libraries. These provide the necessary tools to connect the application with the sink via a serial forwarder. To synchronize the message types send by the motes and the Java application TinyOS provides the possibility to generate message classes directly from the nesC message structures. The Java application needs to know two different messages. One that contains the information collected by a node and one that contains the information about the schedule. The application know needs to implement message listener for both types of messages so it is able to receive and react to each message individually.

To store information about all the nodes the Java application needs to implement a hash map containing one *Node* object for every node inside the network with its ID as the key. This makes it easy to access the information of each individual *Node* object. To store the information about a node's neighbours, the *Node* class implements a list containing references to *Node* objects representing the neighbours of the node. To store the RSSI measurements of a node the *Node* class implements a hash map containing lists. Again the key values of the hash map are node IDs. The lists inside the hash map contain all the measurements from the node corresponding to the key.

Now whenever the Java application receives a message containing measurements of a node it gets the corresponding node object from the hash map containing all the nodes. Then it updates the neighbour list of the node and save the measurements inside the measurement hash map of the node object.

4.3 Calibration

To calibrate the the network by using the procedure explained in Chapter 3.2 the Calibration component needs to send messages without a specific pattern. These messages need to contain information about the path quality and the parent of the node. A possible message structure that fulfils these requirements is shown in Listing 4.1.

Listing 4.1: Message structure for the messages, containing information about the parent and the path quality of the sending node

```
nx_struct CalibrationMsg {
    uint8_t parent,
    uint8_t path_quality
}
```

To make sure that all the node send their messages roughly in the same time interval a way to indicate when the calibration starts is needed. This can be achieved by one node starting its calibration phase and the sending of messages. Then when another node

receives a *CalibrationMsg* and hasn't started its calibration it starts its calibration. Another problem is that if all the nodes send their messages directly after another there would be a lot of messages in the network at the same time. To reduce this each node has a small delay between the messages it sends. To make this even more sufficient each node could have a different delay between its messages. This delay can be calculated as

$$\Delta p = T + \text{ID}^2 \% N$$

where T is the minimal time between sends, ID is the node's ID, and N the number of nodes in the whole network. Now whenever a node sends a message it can start a timer that fires after Δp and then send the next message when the timer fires. Whenever a node sends a message it includes its stored parent and path quality.

To collect data from other nodes each node needs a neighbour list where it can store the nodes in range and the measured values. This neighbour list can be implemented by an array of the *Node* struct shown in Listing 4.2 and the size N . The structure can store the last received signal strength, if the node is in range and the parent of the node. The other fields are used for the other phases. Now whenever a node receives a message it first sets the *inRange* field for that node to *true*, store the measured received signal strength in the *last_rssi* field and set the *parent* field to the *parent* field inside the message.

Listing 4.2: Structure to store information about nodes, containing the last RSSI measured, if the stored node is in range, the parent of the stored node, if the node received the data from stored node, if the node received the schedule from the stored node and the messages received from the stored node

```
typedef struct Node {
    int8_t last_rssi;
    int8_t inRange;
    uint8_t parent;
    int8_t receivedData;
    int8_t receivedSchedule;
    uint16_t msg_counter;
}
```

The next thing for the node is to evaluate if it should use the sending node as a parent. This is done like explained in Chapter 3.3. However the link quality is not directly presented by the RSS. Instead the RSS is mapped to a value where a high RSS represents a low value and a low RSS a high value. An example for the mapping of the RSS to the path quality is given in Table 4.1. This mapping is determined by the network and needs to be defined for each individually. When the link quality is mapped it is added to the *path_quality* field stored in the message. Then the calculated value is compared to the stored path quality of the sending node. If the calculated value is smaller than the

Table 4.1: Example mapping of RSSI to a value representing the path quality

RSSI	Quality
-50	1
-70	2
-80	7
-90	14

stored path quality the sending node is a more suitable parent and the stored parent and path quality is adjusted accordingly.

A node concludes its calibration phase and signals the *calibrationDone* event after sending a defined number of messages. This number however is also determined by the network and its complexity.

To make sure the sink does not start to collect data from the network before every other node finished its calibration it needs to wait after sending all its messages before it can signal the *calibrationDone* event. The time the sink needs to wait depends on the number of nodes and the calculation of the break between messages.

4.4 Collection

Before starting the collection the Collection component needs the information gathered by the Calibration component. When the neighbour list and path info is attached to the component the sink can start the collection by sending a request message like the one in Listing 4.3 to one of its children. To find a child a node can go through its neighbour list and simply check if the *parent* field in the *Node* struct is set to the ID of the node. When a node receives a request message it searches for a child of itself and forward it like described in Chapter 3.3.

Listing 4.3: Structures representing a request message

```
typedef nx_struct RequestMsg {
    nx_uint8_t id;
    nx_uint8_t round;
}
```

When the request reaches a node without any children it fills its measurements into the *measurements* field of a data message like the one represented in Listing 4.4. Since it is possible that a node has more measurements than the maximal amount of data fitting into one message we need the field that indicates how much data is left. If a node has more measurements it directly fills multiple messages and send them one after another to

its parent. The receiving node buffers all the data messages until it received the message where the *dataLeft* field is set to zero. Then it forwards all the received messages one after another. Whenever a node received the whole dataset of a node it marks that node as done sending by simply setting the *receivedData* field for the node to true. Note that the receiving node does not necessarily mark the node it directly received the dataset from but the source of the dataset indicated by the *from* field inside the data messages.

Listing 4.4: Structures to send the data from a node to the sink. The NodeMsg contains the measurements from one neighbour including the id of the neighbour and the measured RSSI. Inside the DataMsg the source of the measurements, the answered request id and how much data is left is stored

```
typedef nx_struct Measurement {
    nx_uint8_t id;
    nx_int8_t rssi;
}

typedef nx_struct DataMsg {
    nx_uint8_t from;
    nx_uint8_t request_id;
    nx_uint8_t dataLeft;
    Measurement measurements[MAX_MSG_PAYLOAD - 3];
}
```

A problem that needs to be addressed are message drops. Without detecting a message drop and resending the message afterwards the collection simply stops if one message does not get received. To detect a message drop each node receiving a message directly sends an acknowledgement to the sending node. This is required for both the request and the data message and is done before any processing of the message. Now if the sending node did not get an acknowledgement for a message it resends that message. Since not only the actual message can drop but also the acknowledgement, it can happen that a message gets retransmitted one or multiple times although the message was already received and processed at the receiving node. The processing of the same message multiple times however can create chaotic behaviour, resulting in the system to stop working and/or messages still being sent after the collection is already finished and thus distorting the RSSI measurements.

To prevent this each request gets an ID from the sink in ascending order and the round of the collection. Whenever a node sent its data it increases its saved round by one and set the saved request ID to zero. When a node receives a request it checks if the round of the request equals the saved round. If not it throws away the request. If yes it checks if the id of the request is larger than its saved last request ID. Is that the case it saves the received request ID and process the request, otherwise it throws it away. To catch

already received data messages we include the request id the data was requested with inside the data message. When a node receives a data message it can then check if the data is corresponding to the request the node sent. If that is the case it also checks if the *dataLeft* field in the message is smaller than the one in the data message previously received. If that is not the case the data inside that message were already received and the message gets thrown away.

4.5 Creating the Schedule

The creation of the schedule happens at the base station when it received the data about the connections between nodes. The method presented in Listing 3.1 could be directly translated into the fitting Java code. To do so another class for the rooted circle needs to be added to the general structure of the application. When implementing the method it is important to take into account that links are not always bidirectional meaning when a node 1 is in the neighbour list of another node 2 this only means that node 2 can receive data from node 1, not necessarily that node 1 also receives messages from node 2. This means when we chose a node from a neighbour list this node can never be a successor but only a predecessor of a node. This results in the schedule being created backwards.

Moreover it is a good idea to not simply pick a random node as a predecessor from the neighbour list of a node, but the one with the highest measured RSSI. This reduces message drops while running the schedule, resulting in less time needed for one round.

To bring the schedule into a form that is readable for all the nodes an array can be created that contains all the node IDs in the order they send messages. For the example in Figure 3.4 the array could look like this:

$$\text{Short[] } schedule = \{1, 2, 3, 4, 2, 6, 5, 6, 7, 8, 9, 10, 7, 1\}$$

4.6 Spreading the Schedule

Before the spreading of the schedule can start the *ScheduleSender* component needs the information collected in the Calibration. If the information is attached to the c the spreading of the schedule automatically starts when the base station sends a schedule message like the one in Listing 4.5 to the sink. The message contains the schedule array created by the base station, then the information about how much of the schedule is left and an ID to detect already received messages. When the sink receives the schedule message it forwards it like described in Chapter 3.5.

Listing 4.5: Schedule message structure

```
typedef nx_struct ScheduleMsg {  
    nx_uint8_t msgid;  
    nx_uint8_t dataLeft;  
    nx_uint8_t schedule [MAX_MSG_PAYLOAD-2];  
}
```

Whenever a node receives a message it first checks if it already received that part of the schedule on the basis of the *dataLeft* field. If it did not receive that schedule part yet it copies it to the right place in its own schedule array. Then it marks the node it got the message from and forwards it like described in Chapter 3.5. Last, it checks if the *dataLeft* field inside the just forwarded schedule message equals to zero. When that is the case the component signals the *receivedSchedule* event and provide the full schedule array to the *Control* component. To make it possible to receive multiple schedule parts it is important that whenever a node sends the schedule to its parent, it needs to unmark all its marked nodes, so if necessary it can later send the next schedule part to them.

If the schedule message reaches the sink and the sink does not have any more unmarked children it forwards the schedule to the base station and unmark all its marked nodes. This way the base station knows that either the schedule is spread or it can send the next schedule part that then is spread the same way as the first one. If the sink sent the last part of the schedule to the base station the sink signals the *scheduleSpread* event to let the *Control* component know that every node knows the schedule and the sampling can be started.

Again we need to make sure that no messages get lost, so in this phase as well each message is directly replied by an acknowledgement message. If the sending node did not get the acknowledgement it resends its message. To check if a message was already received we have the *msgid* field in the message. Whenever a node forwards the schedule it increases this field and save the value. Then when a node receives a message it checks if the *msgid* is larger as the saved one. If that is the case it is a new message and needs to be processed. Otherwise the message gets thrown away.

4.7 Sampling

When the schedule is spread and the sample component knows about the schedule and the neighbour list, the sampling can start. The sink starts by broadcasting a message like the one shown in Listing 4.6. The *receiver* field is set to the node ID of the successor of the sink. Then all the nodes receiving the message measure the received signal strength and save it inside their neighbour lists. Then each node that received the message compares their own id with the id saved in the *receiver* field of the message. If they are

equal the node evaluates the fitting successor, save it inside a new message and then also broadcasts it. When the sink receives a message and does not have another successor it signals the *finishedRound* event.

To evaluate the fitting successor the approach coming in mind would be to just go through the schedule array and searching for the sending node followed by the searching nodes id. The successor then would be the node after that. This however is inefficient and unnecessarily stretches the timeslot to catch message drops. Therefore it is suggested to evaluate all the predecessors and successors of a node before the sampling starts by going through the whole schedule once and save them, in the order of appearance, in a structure like the one shown in Listing 4.7. Additionally each node stores the index of the next predecessor successor pair. Then when a node is the successor it can simply check if the predecessor at the saved index is correct and if yes send the new message storing corresponding saved successor and calculate the next index as

$$I + 1 = (I + 1) \% \text{numberOfPS}$$

It can happen that the predecessor at the saved index is corresponding to the sending node. This can happen when a message drops and the node gets skipped. In that case we have through go to all the predecessor successor pairs to find the right successor and adjust the saved index accordingly. However this is still much more efficient than going through the whole schedule.

Listing 4.6: Sample message structure

```
typedef nx_struct SampleMsg {
    nx_uint8_t receiver;
}
```

Listing 4.7: Structures to save the successor and predecessors

```
typedef struct PredecessorSuccessor {
    uint8_t predecessor;
    uint8_t successor;
}

typedef struct SchedulePSCollection {
    uint8_t numberOfPS;
    PredecessorSuccessor preSuc[MAX_PREDECESSORS_SUCCESSORS];
}
```

To catch the message drops like explained in Chapter 3.5.2 every time a node receives a message and is not the successor it needs to run through the schedule array and calculate how many nodes send between the sending node and the receiving node and calculate the time it needs for the schedule to reach the node. Then the node starts a timer that

fires after exactly that time. Moreover the node needs to save the successor in case of the drop. The timer is reset to the new time whenever the node receives a message. When the timer fires the node simply sends a message with the *receiver* set as the saved successor. Since a node can appear multiple times inside the schedule it also needs to calculate the time to its next send directly after it send a message. If it does appear again in the schedule it starts the timer.

Chapter 5

Evaluation

5.1 Experiment Setup

To test the suggested approach for a RSS measurement system described in Chapter 3 the approach was implemented like described in Chapter 4. System was then deployed and tested inside the Testbed described in Chapter 2.4. Two experiments were run. The first one was at night where no one was inside the building where the Testbed is located. The second one was at daytime when there were people working inside the offices covered by the Testbed and also in the other parts of the building.

The implemented system still had some bugs that could not be addressed due to lack of time. However these bugs only made the system stop at one point during the collection and did not influence the measured times for the different phases. This made it necessary to start the system multiple times for each experiment. The application was restarted after half an hour to catch stops. This however made it impossible to evaluate how long it takes until a new calibration is needed.

To calibrate the system 700 messages were sent with a minimum break of 20 ms. After the sink sent all its messages it takes a 50 second break to make sure every node sent its message. The timeslot for the drops was defined as 18 ms. This is really big but when running the system inside a simulation it could be measured that the processing and sending of a message took between 5 ms and 16 ms the extra 2 ms cover a possible error while measuring these values.

5.2 Experiment Night

The first experiment took place at night between 02:00h and 05:30h. At this time no one was present at the whole floor. In this time system was started and restarted 7 times. Between 03:30 and 04:30 the application actually ran the whole 30 minutes and was not stopped by the bug but by the next restart. In all the other cases the application

stopped during a collection. In Table 5.1 the times for each start of the application are shown as well as the over all average times for each phase.

Table 5.1: Measured values for each run of the system. CT = Calibration Times; HOP = Number of hops inside the schedule; ST = Spread time; ACT = Average collection time; CSTD = Standard deviation of collection time; ART = Average round time; RSTD = Standard deviation of round time;

Time	CT	HOP	ST	ACT	CSTD	ART	RSTD	Rounds
02:14 - 02:38	65611	44	784	3592	267	540	55	338
02:45 - 02:51	64545	42	842	3637	280	519	38	73
03:17 - 03:19	64630	42	767	4211	444	502	32	13
04:49 - 04:19	64539	41	740	3609	300	501	62	420
04:21 - 04:51	64565	44	804	3581	245	544	51	419
04:53 - 04:57	64699	40	756	4287	343	429	48	35
05:24 - 05:26	64587	44	787	4150	343	496	23	9
Average	64739	42	782	3625	276	524	54	

The average calibration time was 64739 ms. The time of all the different calibrations did not really change since the exact amount of messages and the break between messages is defined. It takes quite long since a huge amount of messages are sent by each node with a break up to 32 ms. Also the break the sink takes after it sends its message was not calculated perfectly making it possible to reduce resulting in a shorter calibration. When the calibration phase took roughly 64 seconds and the sink took a 50 second it means the sink was done after 14 seconds. Now with the defined break for all the nodes in Chapter (imp szutt) we can calculate the maximum time a node needs to send all its messages. The result would be that the node would take around 40 seconds. This means the calibration time could be reduced by 20 seconds when calculating a correct break for the sink.

The average schedule has 42 hops meaning that 42 messages need to be sent in one round the schedule takes. The schedule with the largest amount of hops has 44 and the smallest has 40 hops. The different schedules emerge through different measured RSS values while calibrating.

Spreading the schedule took averagely 782 ms. This is really fast since one schedule of 40+ hops needs two messages. This means that to spread one schedule part inside the whole network took around 370 ms.

The collection of the gathered information took averagely 3625 ms with an average standard deviation of 276 ms. Compared with the spreading of the schedule this is really slow. However we need to take into account that the collection takes a lot more messages and processing than the spreading. To analyse if the time of the collection

changes during the course of time and if a new calibration is needed. Figure 5.1 shows the times of all the collections between 03:30h and 04:00h. However the Figure does not show any significant change over the 30 minutes of time indicating that there would be no new calibration necessary to maintain the highest possible performance of the application.

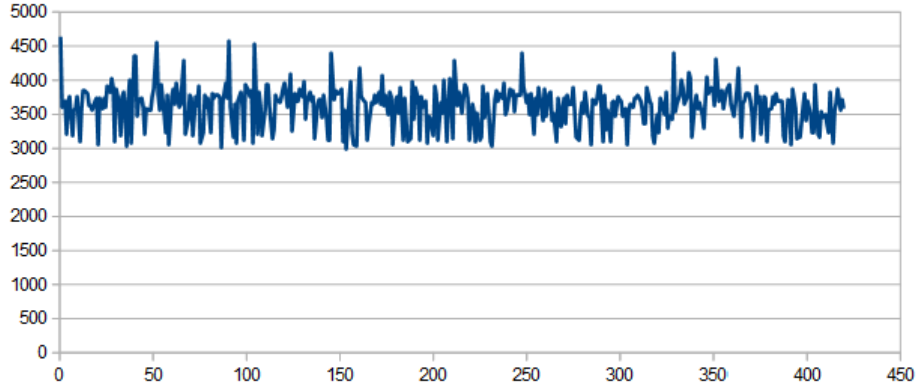


Figure 5.1: Collection times of the measurements from 03:30h to 04:00h

Sending all the messages for one round takes averagely 524 ms with a average standard deviation of 54 ms. Again we want to analyse if the time changes during the course of time. Therefore the times of all the rounds between 03:30h and 04:00h are shown in Figure 5.2. Again we do not see a significant change in the time one round takes. This means that message drops do not increase making the measurements still usable for localisation.

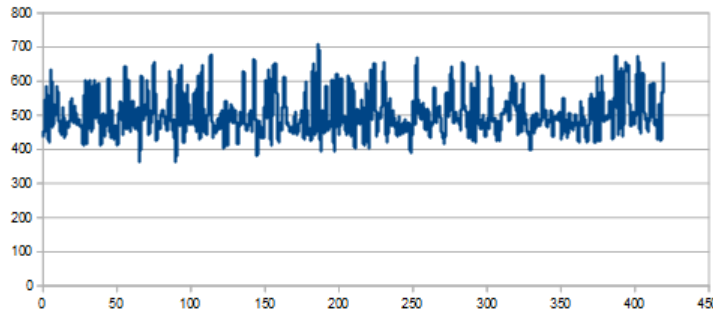


Figure 5.2: Sampling times of the measurements from 03:30h to 04:00h

5.3 Experiment Day

The second experiment took place from 09:15h to 12:45h. In this timespan the application was started and restarted 9 times. The first person arrived at 10:00h, the second at 11:20h, the third at 13:00h and the last one at 13:30. Moreover one person arrived and left somewhere between 10:30h and 12:30h. All these people were working in their offices. The results of the experiment are shown in Table 5.2

Table 5.2: Measured values for each run of the system. CT = Calibration Times; HOP = Number of hops inside the schedule; ST = Spread time; ACT = Average collection time; CSTD = Standard deviation of collection time; ART = Average round time; RSTD = Standard deviation of round time;

Time	Persons	CT	HOP	ST	ACT	CSTD	ART	RSTD	Rounds
09:32 - 09:38	0	64647	43	823	4401	296	492	41	63
10:04 - 10:14	1	64558	44	796	4035	322	563	59	121
10:36 - 10:53	1	64644	41	850	3740	282	482	40	231
11:07 - 11:09	1	64577	41	849	3746	423	533	60	14
11:39 - 12:09	2	64607	39	797	3498	358	495	42	433
12:11 - 12:28	2	64654	41	764	3556	294	495	45	240
12:43 - 13:13	2	64583	44	824	4160	511	539	65	368
13:15 - 13:29	3	64544	44	797	3697	398	542	58	183
13:47 - 13:53	4	64580	41	778	3494	371	528	46	73
Average		64599	42	809	3773	372	514	50	

ToDo: Edu arrived at 9:00 and left at 12:00 via elevator (very likely creating the eruption in the measurements) (This is not integrated jet)

All the values are not significantly different to the values at night. Again we look at the individual times of the collection in Figure 5.3 to see if they change over time. In general the time for a collection does not increase over time, however at around collection 400 we can see a huge eruption. Here the collection once takes 5186 ms and once 7293 ms. After that the collection time normalizes again. This eruption could indicate that at that point in time a, for the links inside the Tesbed, huge change in the environment caused a lot of message drops creating this long collection. This could be an open door that has not been open before or maybe someone calling the elevator and going down with it.

Rounds slight decrease ? more analyse necessary...

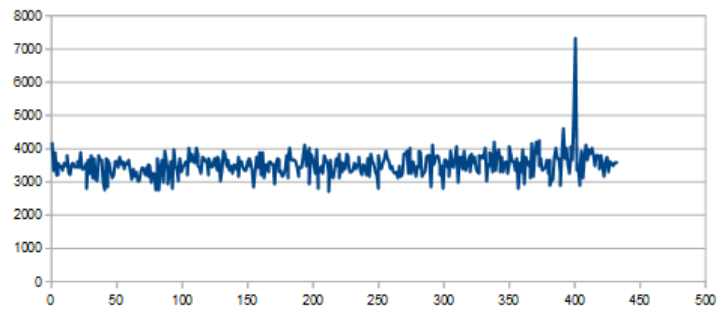


Figure 5.3: Collection times of the measurements from 03:30h to 04:00h

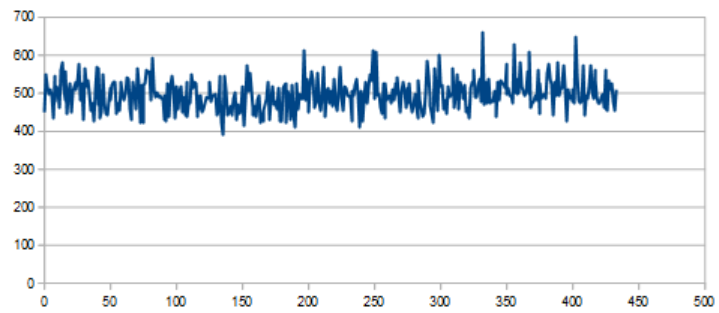


Figure 5.4: Sampling times of the measurements from 03:30h to 04:00h

5.4 Assessment

The experiments show that the system is usable in an office environment for at least half an hour and delivers one full RSS measurement averagely every 4 seconds. The measurement should be fast enough to detect a moving person, however due to the long collection phase the tracking of the person could be quite bad since there are jumps of 3.5 seconds between each measurement.

The experiments also show that the spreading is really fast compared to the collection and also faster than the rounds with the created schedule. This could indicate that changing the collection into something similar and following the same path while taking measurements could improve the system.

Chapter 6

Discussion

6.1 Comparison to a Timeslot Based Approach

The approach suggested by this thesis tries to improve a fully timeslot based approach like Multi-Spin by defining predecessors and successors for each node to eliminate the in a timeslot included error. These two it is possible to calculate how long each round takes in a fully timeslot based system by using the timeslot used for message drops in the suggested approach.

In the experiments a timeslot of 18 ms was used. There are 32 nodes inside the network meaning one round would take 576 ms. The average time a round needed in the experiments was around 520 ms which is actually faster although there are in average 10 messages more that need to be send with the successor predecessor. This however raises the question if the timeslot was chosen to big and therefore distorts the comparison since receiving a message from a predecessor saves to much time. Anyway a predecessor successor approach with a perfect schedule should always be at least equally fast as a timeslot based system.

Moreover an advantage of the timeslot based approach would be that the round would be that rounds would have a very stable time and also every node definitely sends a message while on the suggested approach it can happen that nodes to not send a message due to not receiving a single message until it is its turn.

6.2 Possible Improvements

The first improvement for the calibration was already explained here time can be saved by simply calculating the correct break and not having the system do nothing for 20 seconds.

The next improvement is for the collection. When using nodes with a lot memory it could be a good idea to not always send the data from one node directly to the sink but

first collect all the data of a nodes children before forwarding it. This way the requests and data messages would take the same path as the schedule while spreading it. This would reduce the amount of requests and the over all collection time.

Another thing that can be improved is the algorithm that creates the schedule. Instead of just covering the network with rooted circles it is possible to later connect circles in a way that reduces the amount of messages. Also to improve choosing a next node it would be a good idea to change the calibration in a way that not only the last measured RSS for each link gets saved but a average RSS for a link. A different way to maybe improve the schedule is to simply pick the same path a schedule message would take while spreading it. The experiments already show that spreading the schedule is faster than the rounds with the created schedule.

Chapter 7

Acknowledgements

(This part is optional, and it could be completely excluded by deleting
`\include {content/chapters/chapter7}`
from the `Firstname_Lastname_Diplom_Master_arbeit.tex` file)

This paragraph could mention people or institutions that supported you to some extent
with your work or friends and relatives that supported you during your study period.

Bibliography

- [BKP] BOCCA, MAURIZIO, OSSI KALTIOKALLIO and NEAL PATWARI: *Radio Tomographic Imaging for Ambient Assisted Living*.
- [CT] CROSSBOW TECHNOLOGY, INC.: *TelosB Mote Platform Datasheet*.
- [LMP⁺] LEVIS, P., S. MADDEN, J. POLASTRE, R. SZEWCZYK, K. WHITEHOUSE, A. WOO, D. GAY, J. HILL, M. WELSH, E. BREWER and D. CULLER: *TinyOS: An Operating System for Sensor Networks*.
- [Soma] SOMEONE: <http://tinyos.stanford.edu/tinyos-wiki/index.php/TinyOSDocumentationWiki>.
- [Somb] SOMEONE: *WSN book*.

Erklärung

German

Hiermit versichere ich, dass ich die vorliegende Bachelorarbeit selbständig verfasst, keine anderen als die angegebenen Quellen und Hilfsmittel benutzt, sowie Zitate kenntlich gemacht habe.

English

I hereby declare that I have written this Bachelor thesis independently, using no other than the specified sources and resources, and that all quotations have been indicated.

Essen, February 6, 2017
(Place, Date)

Jan Nauber