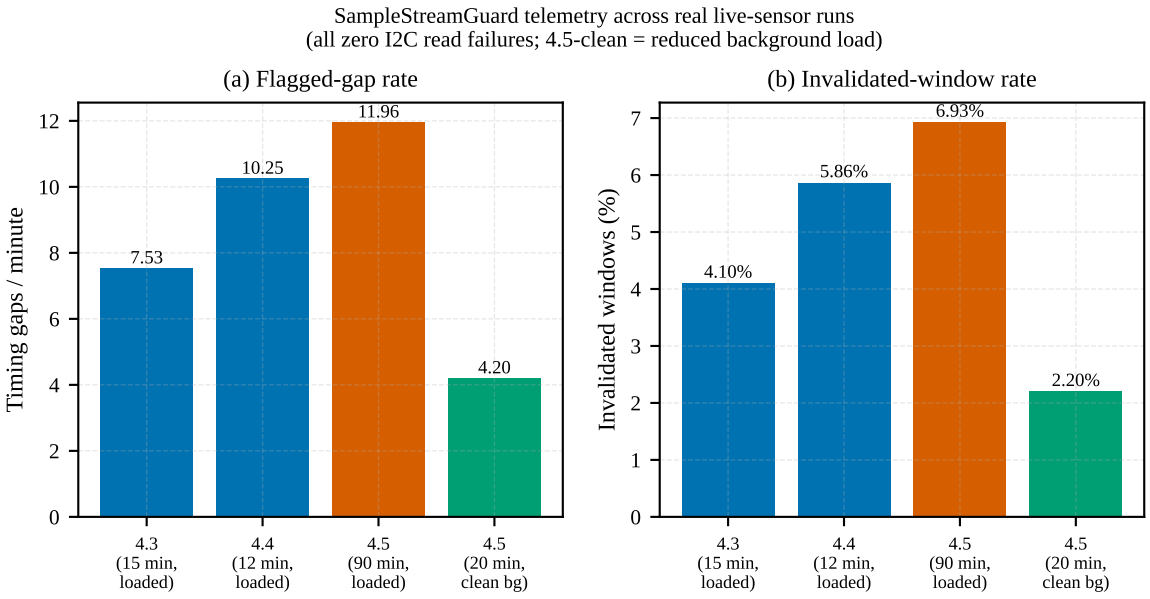
SampleStreamGuard telemetry across real live-sensor runs
(all zero I2C read failures; 4.5-clean = reduced background load)
(a) Flagged-gap rate
Timing gaps / minute
0
2
4
6
8
10
12
7.53
10.25
11.96
4.20
4.3 (15 min, loaded)
4.4 (12 min, loaded)
4.5 (90 min, loaded)
4.5 (20 min, clean bg)
(b) Invalidated-window rate
Invalidated windows (%)
0
1
2
3
4
5
6
7
4.10%
5.86%
6.93%
2.20%
4.3 (15 min, loaded)
4.4 (12 min, loaded)
4.5 (90 min, loaded)
4.5 (20 min, clean bg)