

EAU: 1,800,000

FCA standards and specifications are subject to frequent revisions. It is the user's responsibility to comply with current versions.

For more information contact Engineering Standards Group at email engstds@fcagroup.com and/or Normazione Group at normazione@fcagroup.com

Author GAMBREL STEVEN - steven.gambrel@stellantis.com
Supervisor WARD KEVIN - kevin.ward@stellantis.com

Author Department FCA US -- FASTENERS - 5850
Supervisor department FCA US -- FASTENERS - 5850

 FIAT CHRYSLER AUTOMOBILES	LARGE ROUND WASHER SCREWS WITH HEADER POINT AND 6 LOBED DRIVE	SP-A0413
		Standard Parts
		Page: 1/6
		Date: 14-MAY-2021
ASF CONTROLLED WHEN RED 10f6 11/3/22 DS REGIONAL DOCUMENT		
Change level	Date	Description of change
-	04-JUL-2017	Initial release
A	29-JAN-2020	UPDATED REF STANDARDS AND TEMPLATE
B	14-MAY-2021	Updated missing part number 06104114AA
ANY PRINTED COPY IS TO BE DEEMED AS UNCHECKED; THEREFORE THE UPDATED COPY MUST BE CHECKED IN THE APPROPRIATE WEB SITE CONFIDENTIAL THIS DOCUMENT MUST NOT BE REPRODUCED OR CIRCULATED TO THIRD PARTIES WITHOUT PRIOR WRITTEN CONSENT BY THE RELEVANT FCA COMPANY. IN CASE OF DISPUTE, THE ONLY VALID REFERENCE IS THE ENGLISH EDITION		

06104124AA



FIAT CHRYSLER AUTOMOBILES

SP-A0413

Page: 2/6

Change Level: B

LARGE ROUND WASHER SCREWS WITH HEADER POINT AND 6 LOBED DRIVE

TABLE OF CONTENTS

1 GENERAL	3
1.2 Coverage of this Standard	3
1.3 Limitations on Usage	3
2 REFERENCES	3
3 DEFINITIONS/ABBREVIATIONS/ACRONYMS/SYMBOLS	4
4 CORRELATION TO OTHER STANDARDS	4
5 REGULATED SUBSTANCES & RECIPLABILITY	4
6 GEOMETRY	4
7 TABLE OF PART NUMBERS	5
8 GENERAL SPECIFICATION	6
9 MATERIALS, FINISH AND SURFACE COATING	6
10 SPECIAL QUALITY REQUIREMENTS	6
11 APPROVED SOURCE LIST	6

**ASF
CONTROLLED
WHEN RED**
2086 11/3/22
RS

Printed by W47530A@auth.fcagroup.com on August 10, 2022 04:44 PM

 FIAT CHRYSLER AUTOMOBILES	SP-A0413	Page: 3/6 Change Level: B	
1 GENERAL The Large round washer head screws covered by this standard is for general high volume usage with pre-threaded nuts spanning over normal clearance holes or slots. All parts in this standard are released as Change (PCL) A. The document change control follows normal corporate change increments. 1.2 Coverage of this Standard Standard Parts shall be identified by the category code: 020.300 (Screw/Large round washer Head). 1.3 Limitations on Usage Not applicable. 2 REFERENCES			
Table 1 - References			
Document Number	Shield/Designator (if applicable)	Document Title	downloadable for suppliers from beStandard
01307		STEEL BOLTS AND NUTS - REPRESENTATION, DESIGNATION AND MARKING FOR THREADS, SCREWS AND NUTS	Y
ISO 261		ISO GENERAL PURPOSE METRIC SCREW THREADS	N
ISO 4759		GENERAL TOLERANCES	N
ISO 8992		GENERAL REQUIREMENTS	N
ISO 965		ISO GENERAL PURPOSE METRIC SCREW THREADS	N
MS.50077	<S>	EXTERNALLY THREADED FASTENERS FOR NORMAL USE (HARMONIZED 2 IN 1)	Y
PF.90348	<S>	INSPECTION OF THREADED FASTENERS FOR NORMAL USE AND SPECIAL USE AND SURFACE DISCONTINUITIES ON THREADED FASTENERS	Y
PS.20001		"TORX" - 6-LOBE INTERNAL RECESS - INSPECTION PRACTICE	Y
PS-11036		CORROSION RESISTANT COATING - ZINC-RICH / ALUMINUM-RICH - CHROMIUM-FREE- NON-ELECTROLYTIC	Y
PS-7099		GENERAL SPECIFICATIONS - FASTENERS AND FITTINGS	Y

**ASF
CONTROLLED
WHEN RED**
326 11/3/22 B



FIAT CHRYSLER AUTOMOBILES

SP-A0413

Page: 4/6

Change Level: B

3 DEFINITIONS/ABBREVIATIONS/ACRONYMS/SYMBOLS

SP	STANDARD PARTS
CATEGORY	NUMERICAL CODE THAT PRE DEFINES A NOUN NAME OF A FASTENER
CODE	TYPE
ISO	INTERNATIONAL STANDARDS ORGANIZATION
FCA	FIAT CHRYSLER AUTOMOBILES

4 CORRELATION TO OTHER STANDARDS

Not applicable.

5 REGULATED SUBSTANCES & RECIBLABILITY

Not applicable.

6 GEOMETRY

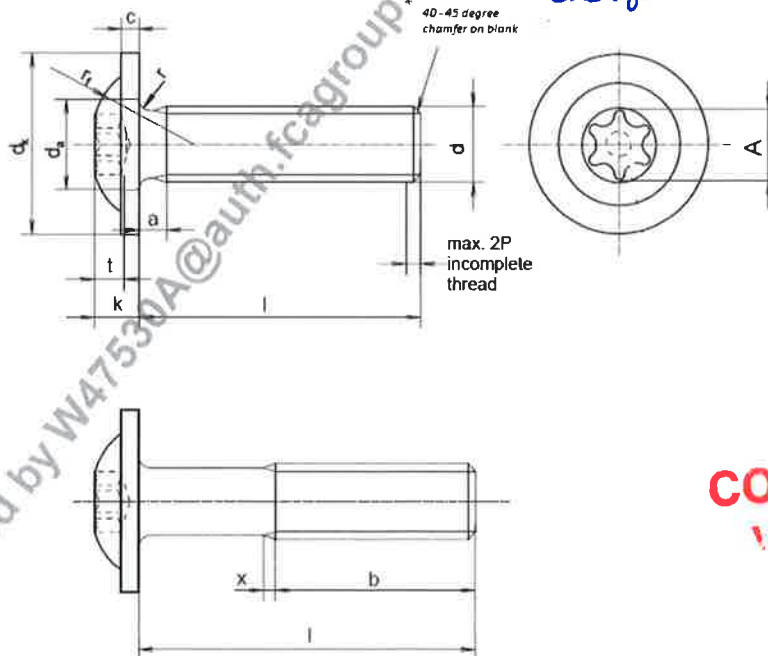


Figure 1 - Large round washer Head screws



FIAT CHRYSLER AUTOMOBILES

SP-A0413

Page: 5/6

Change Level: B

Table 2 - Large round washer Head screws dimensions

Thread dia		M5	M6	M8
p ¹		0.8	1.00	1.25
a	Max	1.6	2	2.5
b		40	50	65
d _a	Max	5.7	6.8	9.2
d _k	Max	11.5	14.5	19.00
	min	10.8	13.8	18.16
k	Max	3.95	4.75	6.15
	Min	3.65	4.45	5.85
C	Max	1.35	1.8	2.2
	Min	1.05	1.4	1.8
r	min	0.2	0.25	0.4
r _f	approx	6.6	8.2	11
x	Max	2	2.5	3.2
Drive Size		T25	T30	T45
A	Ref	4.5	5.6	7.95
t	Max	1.91	2.42	3.18
	min	1.52	2.02	2.79

ASF
CONTROLLED
WHEN RED
5 of 6
11/3/22 AS

7 TABLE OF PART NUMBERS

Table 3 - Part Numbers and Sixes

	Pitch	Length	Finish	Strength (Property class)	Nominal Size
M5	0.8	8	PS-11036	8.8	06104114AA
M5	0.8	10	PS-11036	8.8	06104115AA
M5	0.8	12	PS-11036	8.8	06104116AA
M5	0.8	16	PS-11036	8.8	06104117AA
M5	0.8	20	PS-11036	8.8	06104118AA
M6	1.00	10	PS-11036	8.8	06104119AA
M6	1.00	12	PS-11036	8.8	06104120AA
M6	1.00	16	PS-11036	8.8	06104121AA
M6	1.00	20	PS-11036	8.8	06104122AA
M6	1.00	25	PS-11036	8.8	06104123AA
M6	1.00	30	PS-11036	8.8	06104124AA
M6	1.00	35	PS-11036	8.8	06104125AA
M6	1.00	40	PS-11036	8.8	06104126AA
M8	1.25	12	PS-11036	8.8	06104127AA
M8	1.25	16	PS-11036	8.8	06104128AA
M8	1.25	20	PS-11036	8.8	06104129AA
M8	1.25	25	PS-11036	8.8	06104130AA



FIAT CHRYSLER AUTOMOBILES

SP-A0413

Page: 6/6

Change Level: B

Table 3 - Part Numbers and Sixes

	Pitch	Length	Finish	Strength (Property class)	Nominal Size
M8	1.25	30	PS-11036	8.8	06104131AA
M8	1.25	40	PS-11036	8.8	06104132AA
M8	1.25	45	PS-11036	8.8	06104133AA

Application: The Large round washer head screws covered by this standard are for general high volume usage with pre-threaded nuts spanning over normal clearance holes and slots.

8 GENERAL SPECIFICATION

- A. **Unspecified dimensions:** For detail pertaining to dimensions or unspecified specification, screws shall conform to the specification shown in ISO 8992, ISO 261, ISO 965 and ISO 4759-1, unless otherwise noted. In addition, specification PS-7099 shall also apply unless specified otherwise.
- B. **Threads:** ISO Metric Screw Threads tolerance class 6g.
- C. **Defects:** Large round washer head screws must be free from all defects which might affect their serviceability and conform to specification PF.90348.
- D. **Identification:** 01307
- E. **Material:** Steel – MS.50077<S>, (8.8 property classes) as noted in part number tables.
- F. **Torx/6 lobed recess:** Torx penetration socket engagement shall conform to inspection and specifications in PS.20001.

9 MATERIALS, FINISH AND SURFACE COATING

Screws: Material specification shall be as designated and according to specification Steel MS.50077<S> (for property class 8.8 and 10.9 as noted)

Finish: Parts made from this standard shall be coated as per specification.
PS-11036 – Aluminum Rich dip spin coating

10 SPECIAL QUALITY REQUIREMENTS

Not applicable.

11 APPROVED SOURCE LIST

Not applicable.

**ASF
CONTROLLED
WHEN RED**

6 of 6 DS 11/3/22