


Professional Waterproofing Solutions

Perfection Always



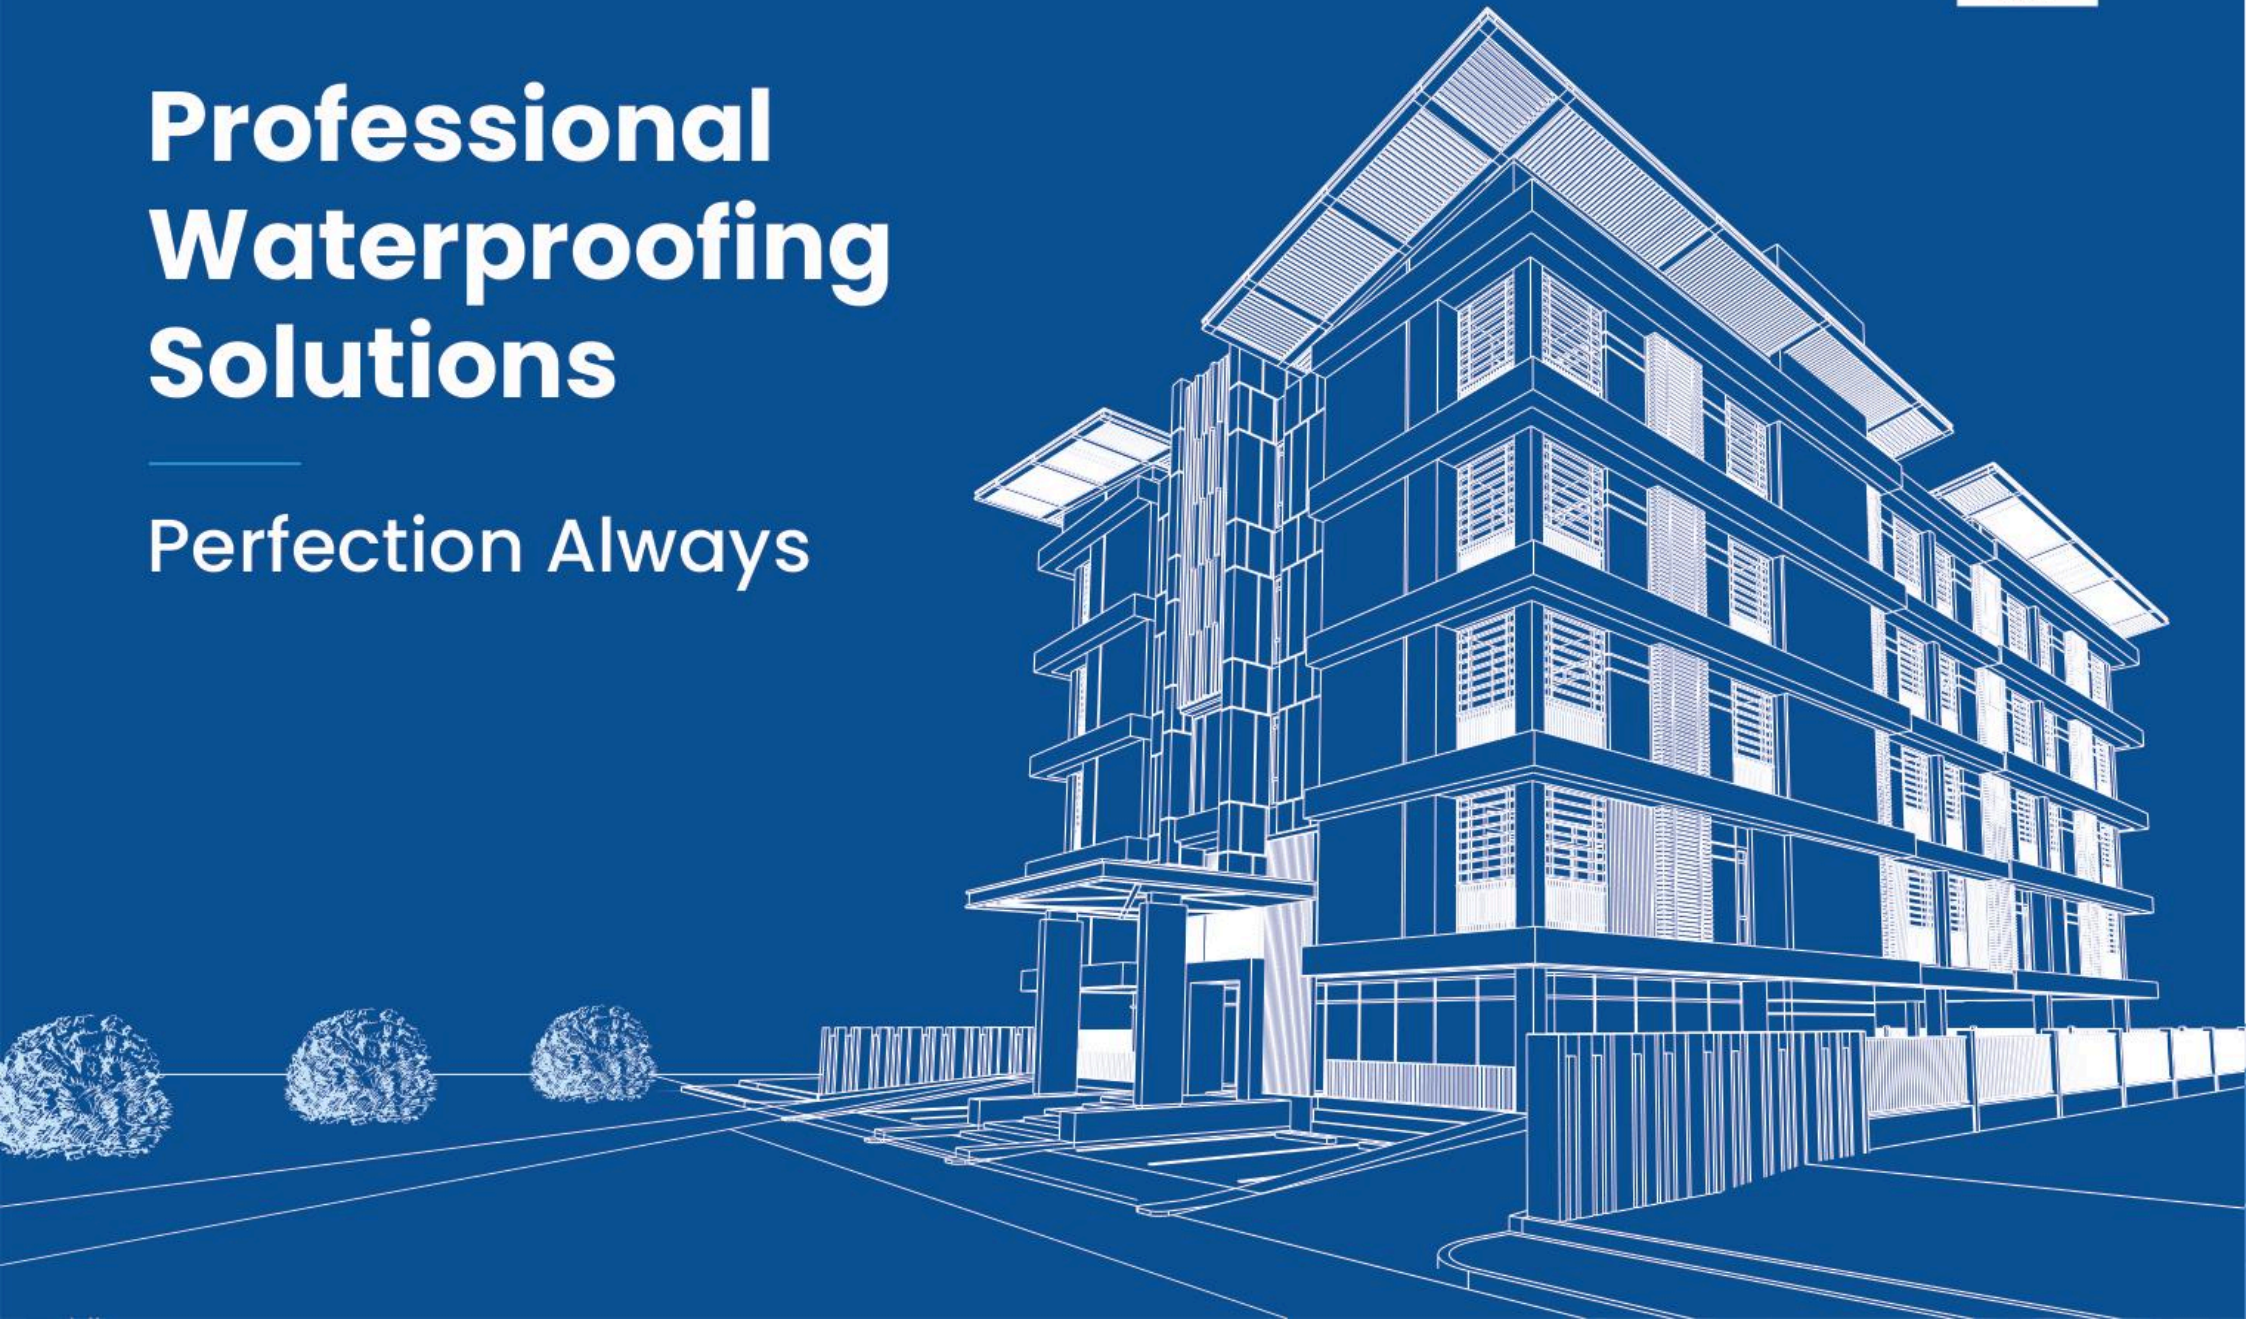

Grasim Industries Ltd. (Birla Paints Div.)

P.O Birlagram, Nagda-456 331, Ujjain,
Madhya Pradesh, India.

www.birlaopusprime.com



Scan to know more about how we
can help you select.

Big In Your Life



Cement



Fashion



Metals



Real Estate



Carbon Black



Textiles



Paints



Financial Services

About Aditya Birla Group

- **165 year old** legacy based on trust, credibility and purpose

- **5,00,000 crore*** INR turnover

- Present in **40 countries**

- **20+ diverse** industries

- **1,87,000+** employees

- **No. 1 position** in multiple industries and domains in both global and Indian marketplace



UltraTech Cement



Grasim Industries



Hindalco Industries



Aditya Birla Fashion & Retail



Aditya Birla Capital



Aditya Birla AMC



Vodafone-idea JV



Century Textiles and Industries

ABOUT BIRLA OPUS PRIME

We do more than just waterproofing, we help clients tell their own story. That's why we've spent **INR 10,000 Cr in investment** with a **production capacity of 1.3 billion litres** per annum across **6 automated plants** and supported by a team of **120+ research experts** with **1000+ years of combined experience**.



Specialized System
Solutions



Large Team of
Techno Commercial
Professionals




Personalized
Engagements



Excellent
Services



PRODUCT PORTFOLIO

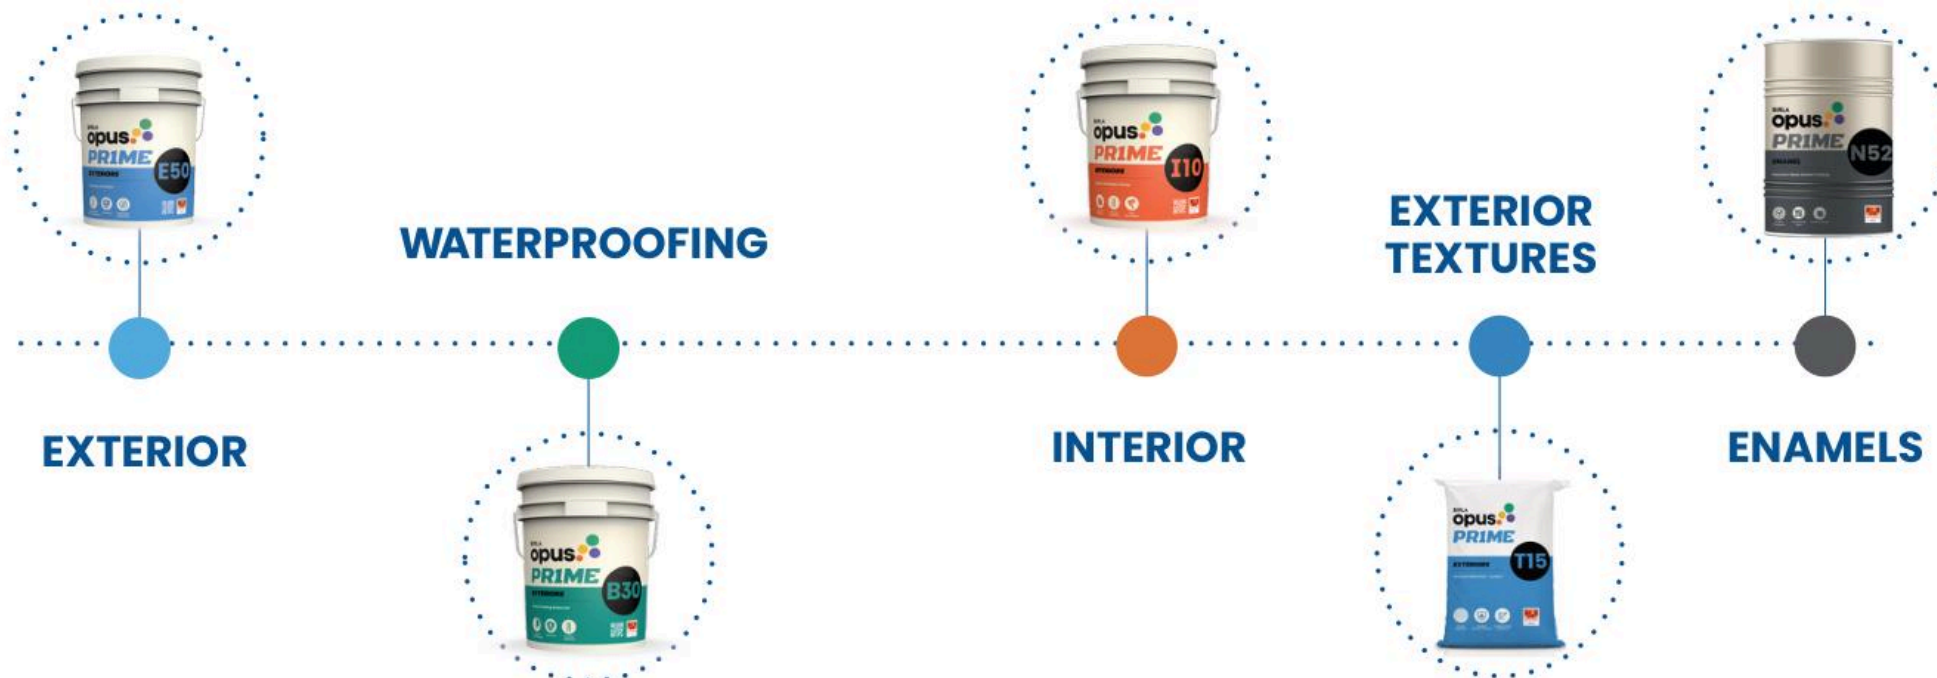

WIDE RANGE OF
28 PRODUCTS
ACROSS CATEGORIES

Application Areas



Basement



Podium



Wet Areas



Swimming
Pool




Water Retaining
Structures



Terrace



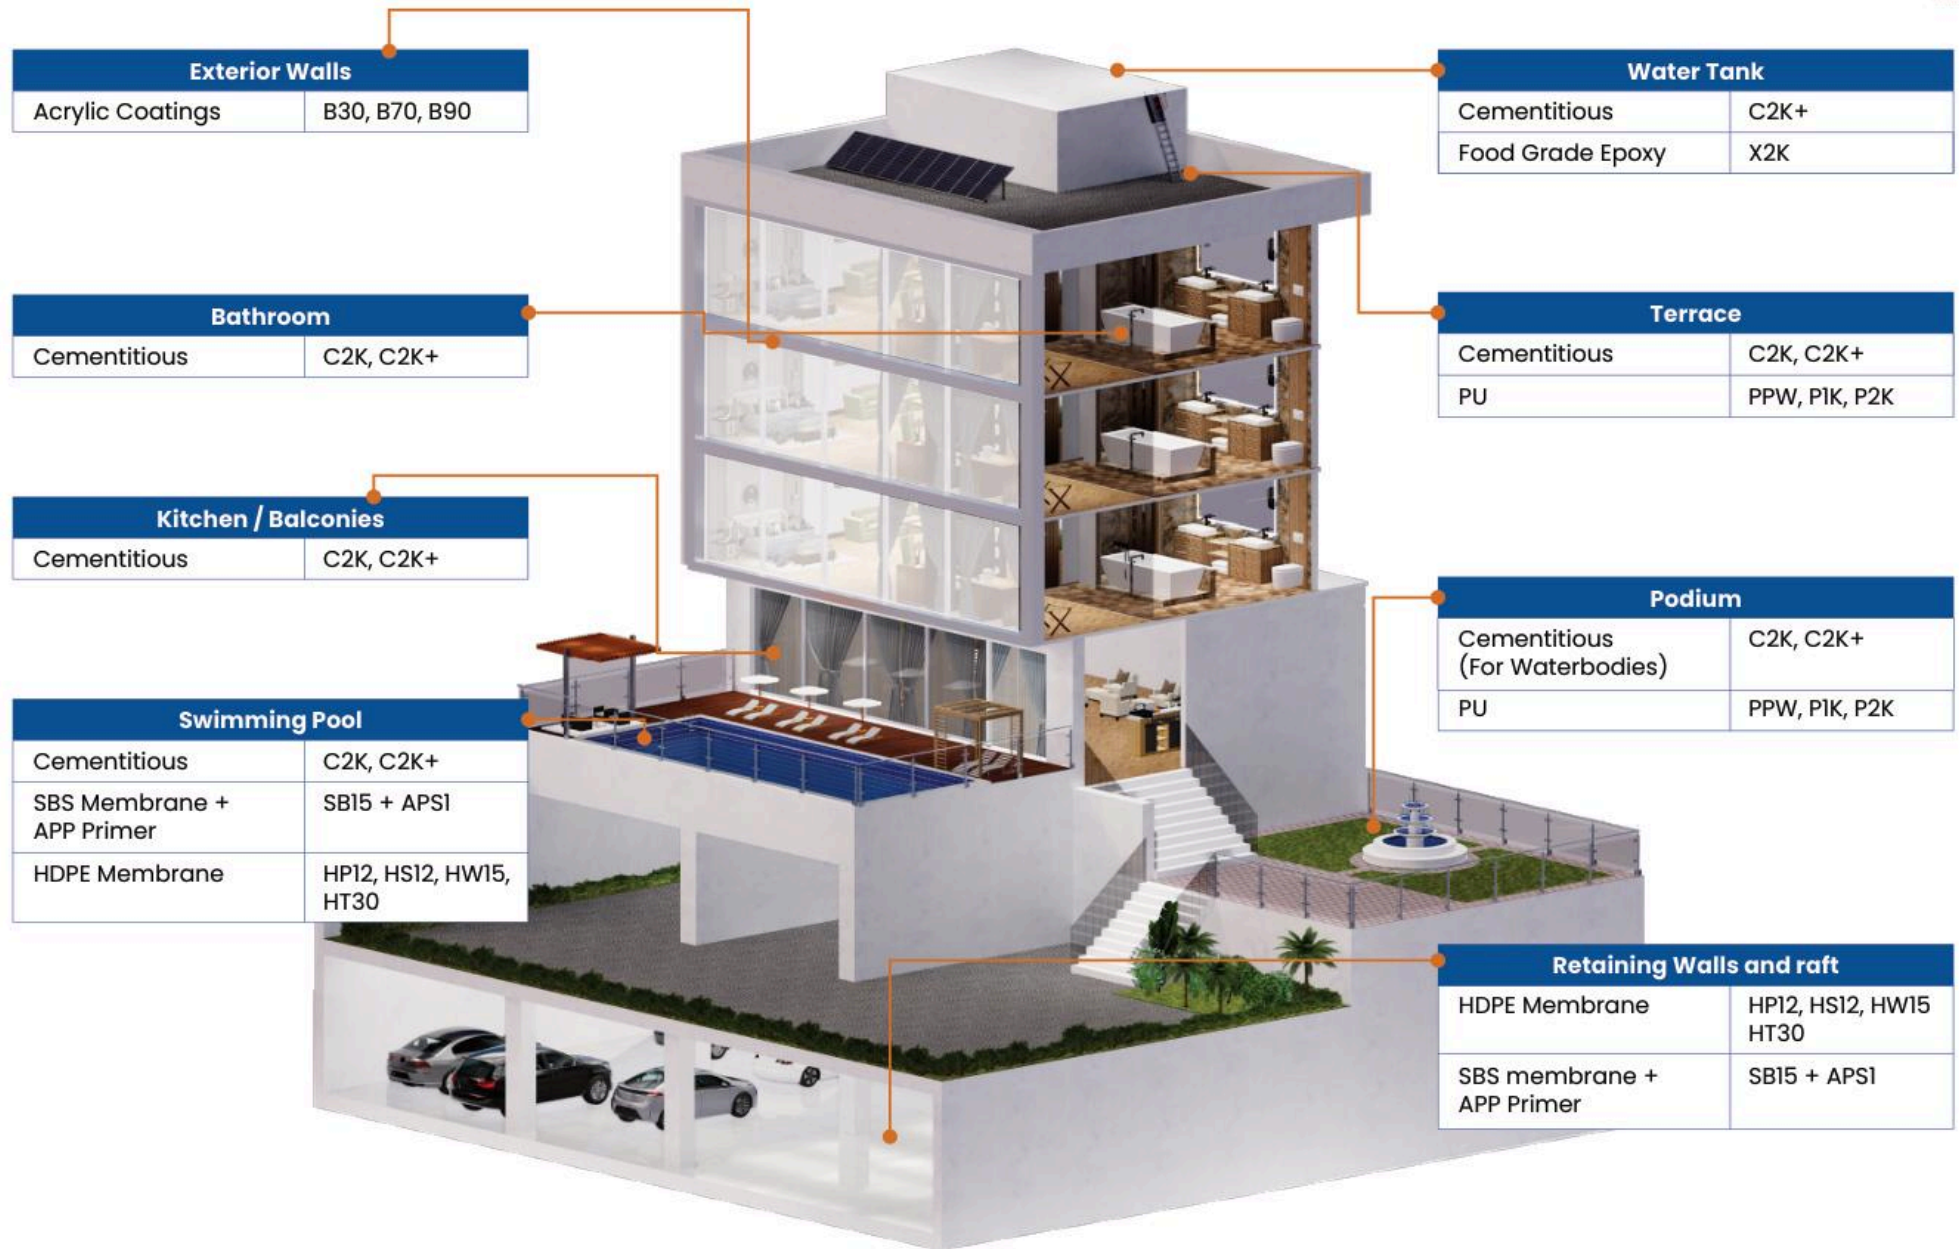

For surface cracks – AllDry Crack Master Paste and AllDry Repair Master




BASEMENT



Basement Application Area

Confined

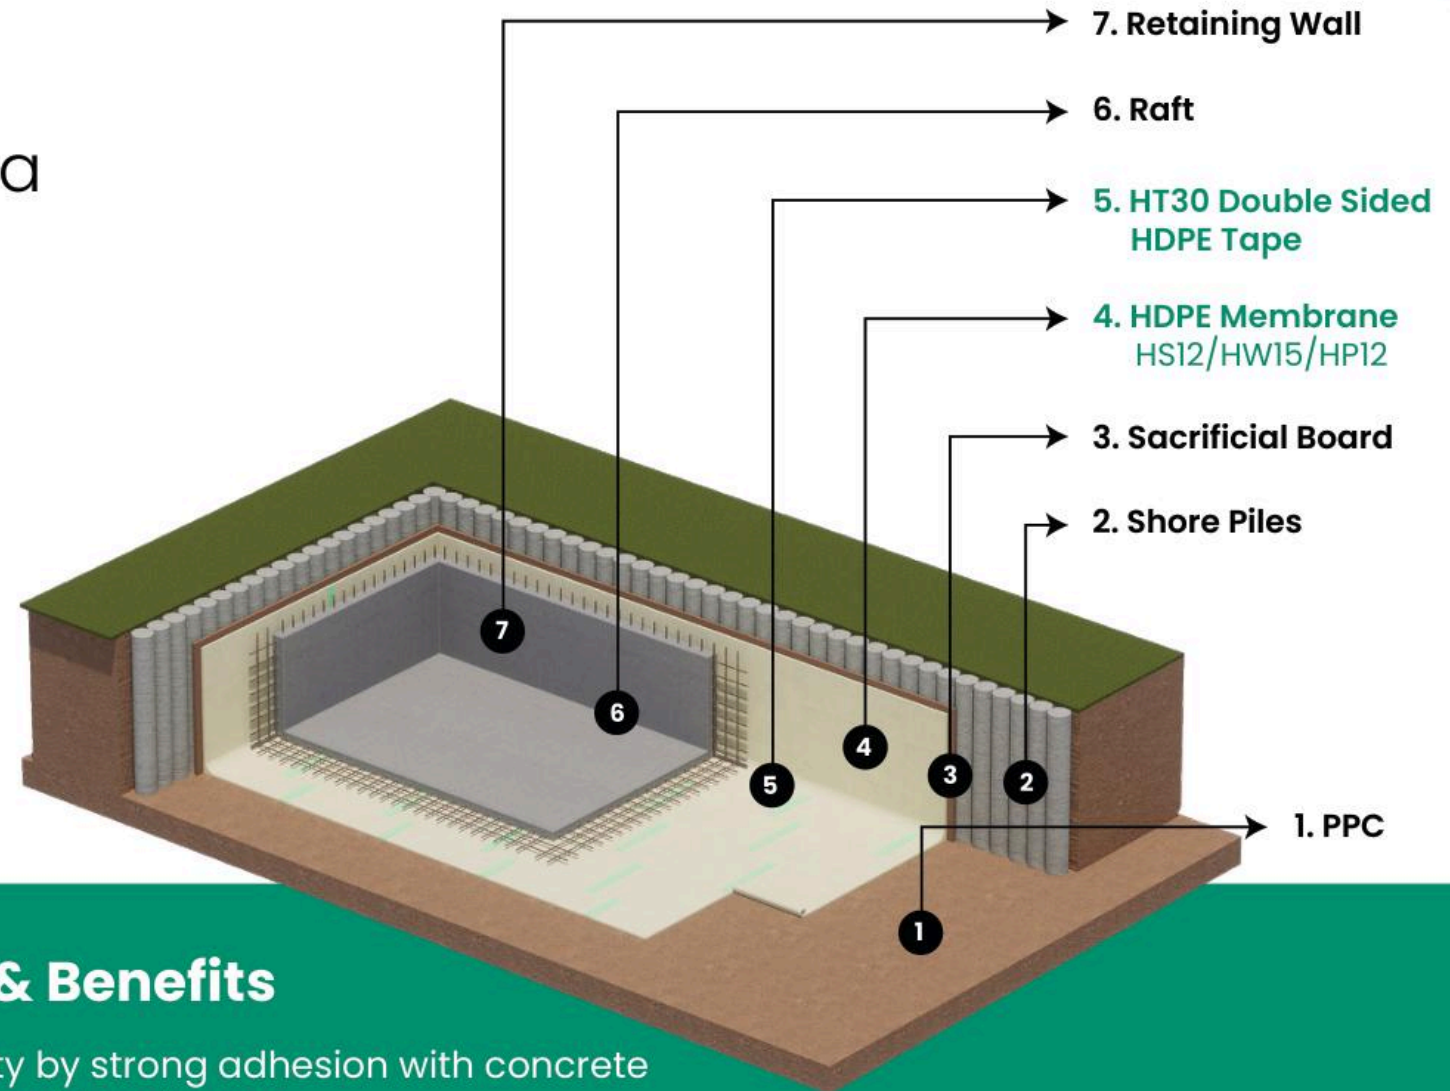


System Features & Benefits

- Ensures structural integrity by strong adhesion with concrete
- Prevents water, gas and moisture ingress
- Offers reliable anti-puncture performance
- Highly resistant to a wide range of chemicals
- Offer resistance to UV radiation, preventing degradation
- Excellent tensile and tear strength
- High cold flexibility

Basement Application Area

Unconfined

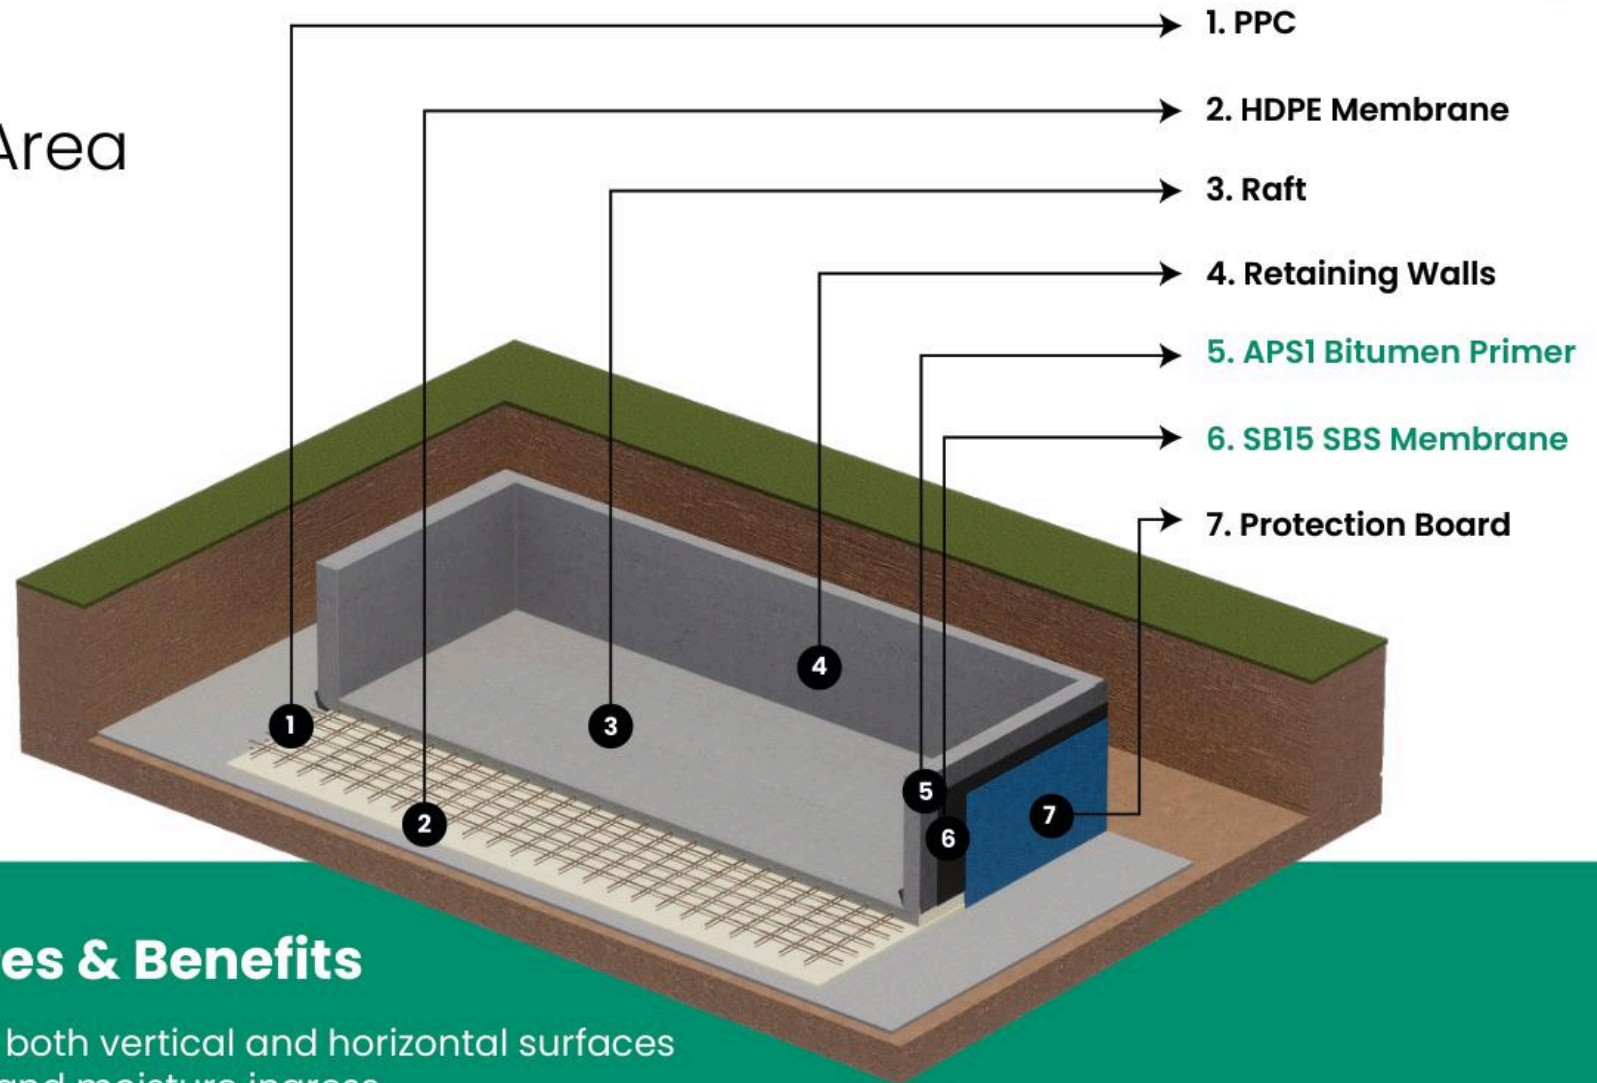

System Features & Benefits


- Ensures adhesion to both vertical and horizontal surfaces
- Prevents water, gas and moisture ingress
- High cold flexibility
- Highly resistant to a wide range of chemicals
- Offers reliable anti-puncture performance
- Excellent tensile and tear strength



SWIMMING POOL


Swimming Pool Application Area

On Podium

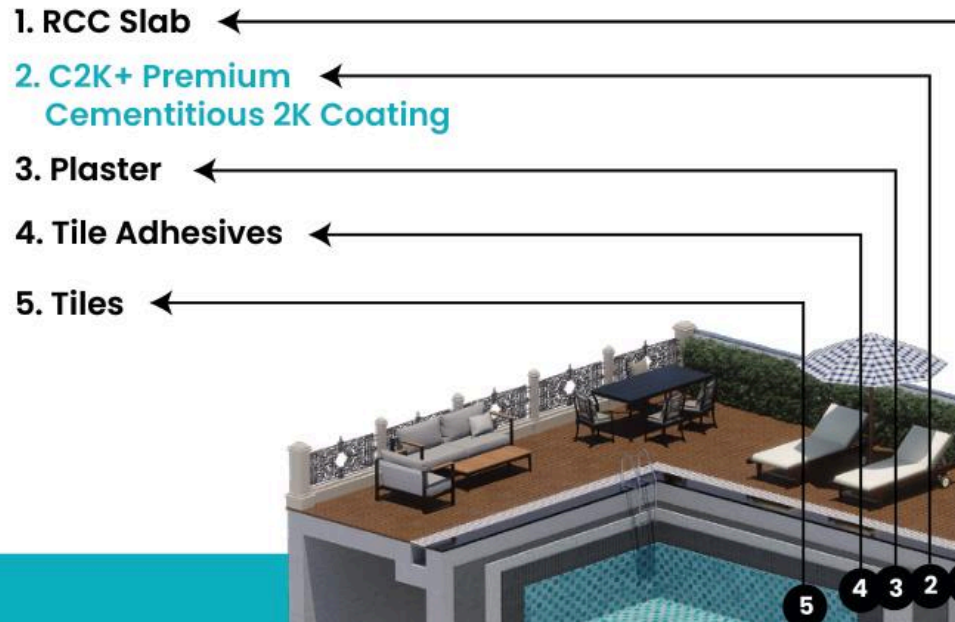


System Features & Benefits

- Mitigates the salt formation
- Highly elastomeric coating provides crack bridging
- Upto 5 bar positive hydrostatic pressure
- Certified potable water safe
- Prevents water ingress
- Ensures adhesion to the concrete
- High tensile strength and elongation
- Upto 10 years of waterproofing warranty*

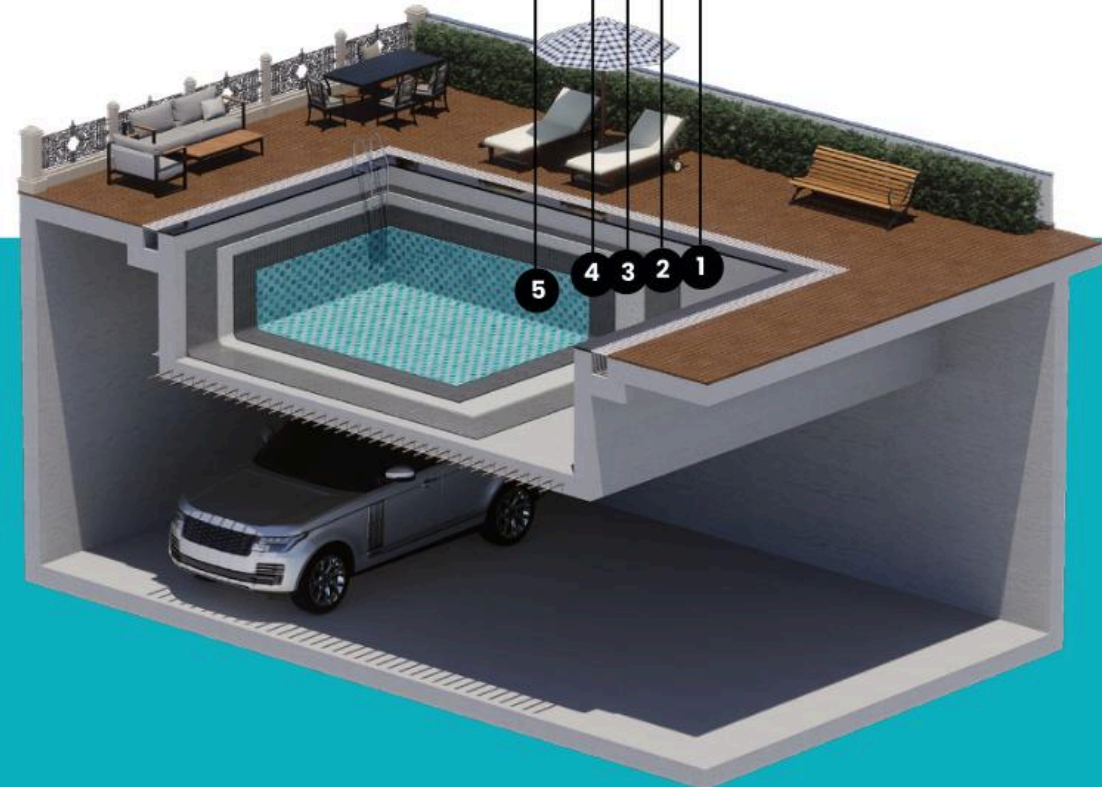

Swimming Pool Application Area

On Ground

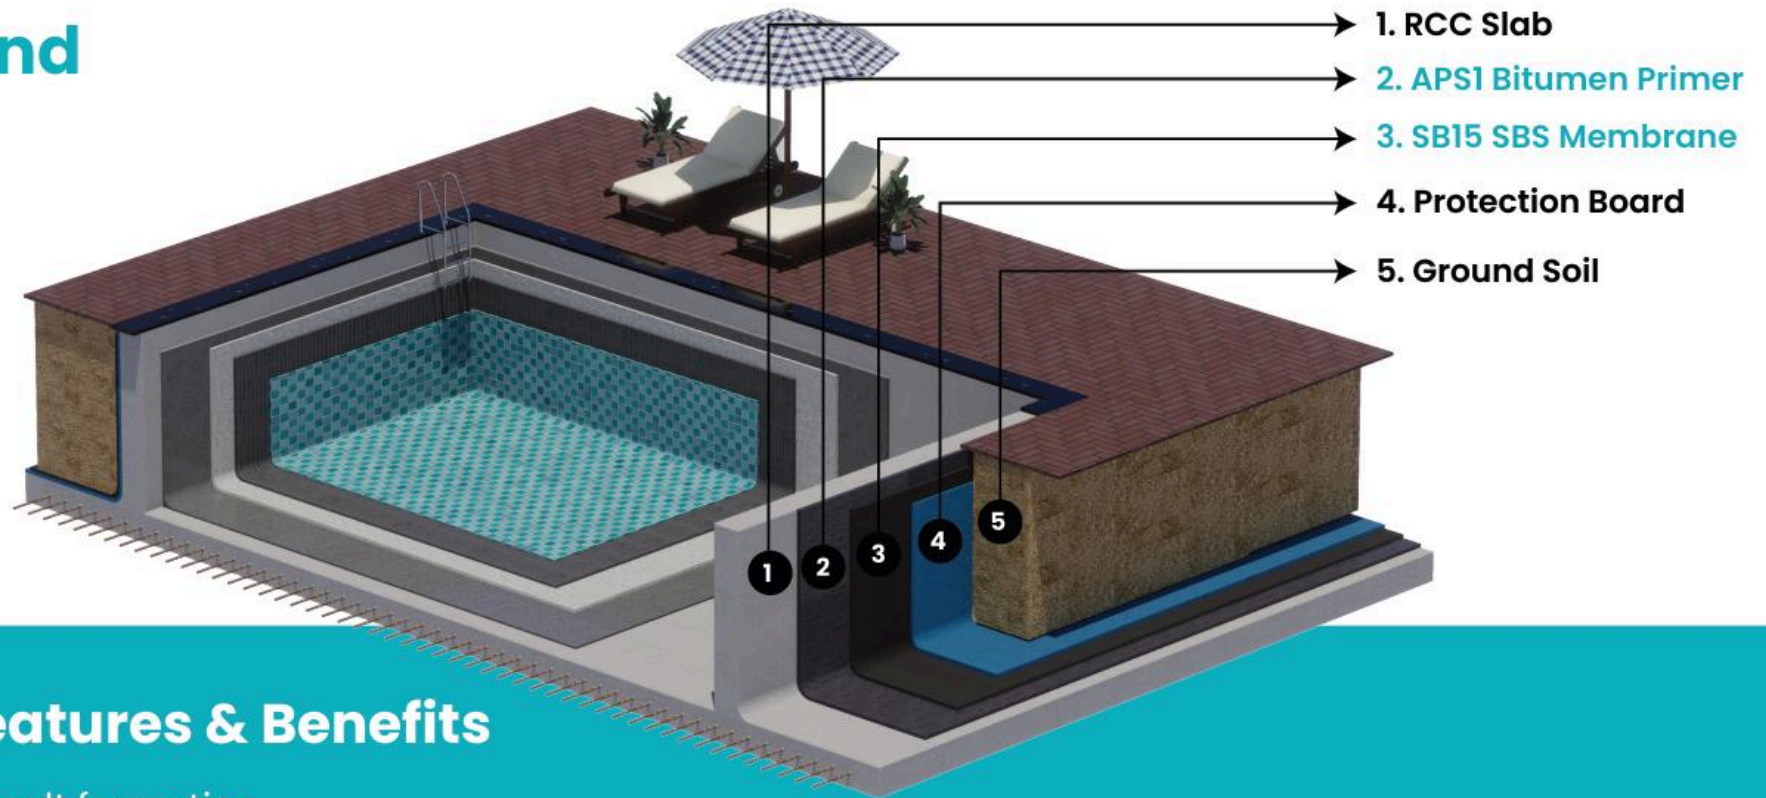

System Features & Benefits


- Mitigates the salt formation
- Highly elastomeric coating provides crack bridging
- Upto 5 bar positive hydrostatic pressure
- Certified potable water safe
- Prevents water ingress
- Ensures adhesion to the concrete
- High tensile strength and elongation



PODIUM

Podium Application Area

Landscape

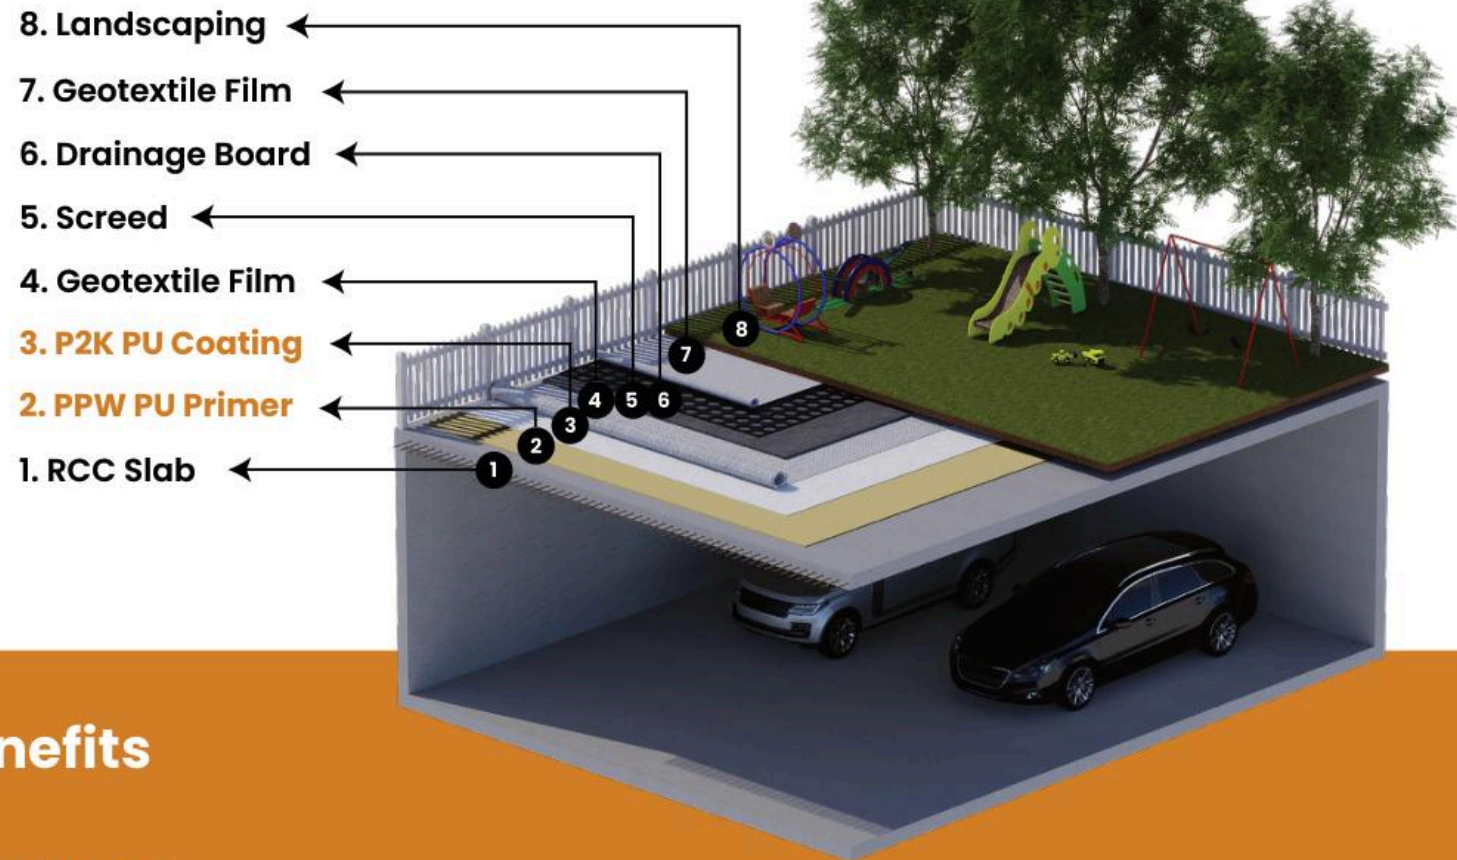


System Features & Benefits

- High solid content
- Prevents water, gas and moisture ingress
- High elongation
- Highly resistant to a wide range of chemicals
- Ensures high crack bridging ability
- High tensile strength
- Strong adhesion to concrete
- Easy to apply

Podium Application Area

Hardscape

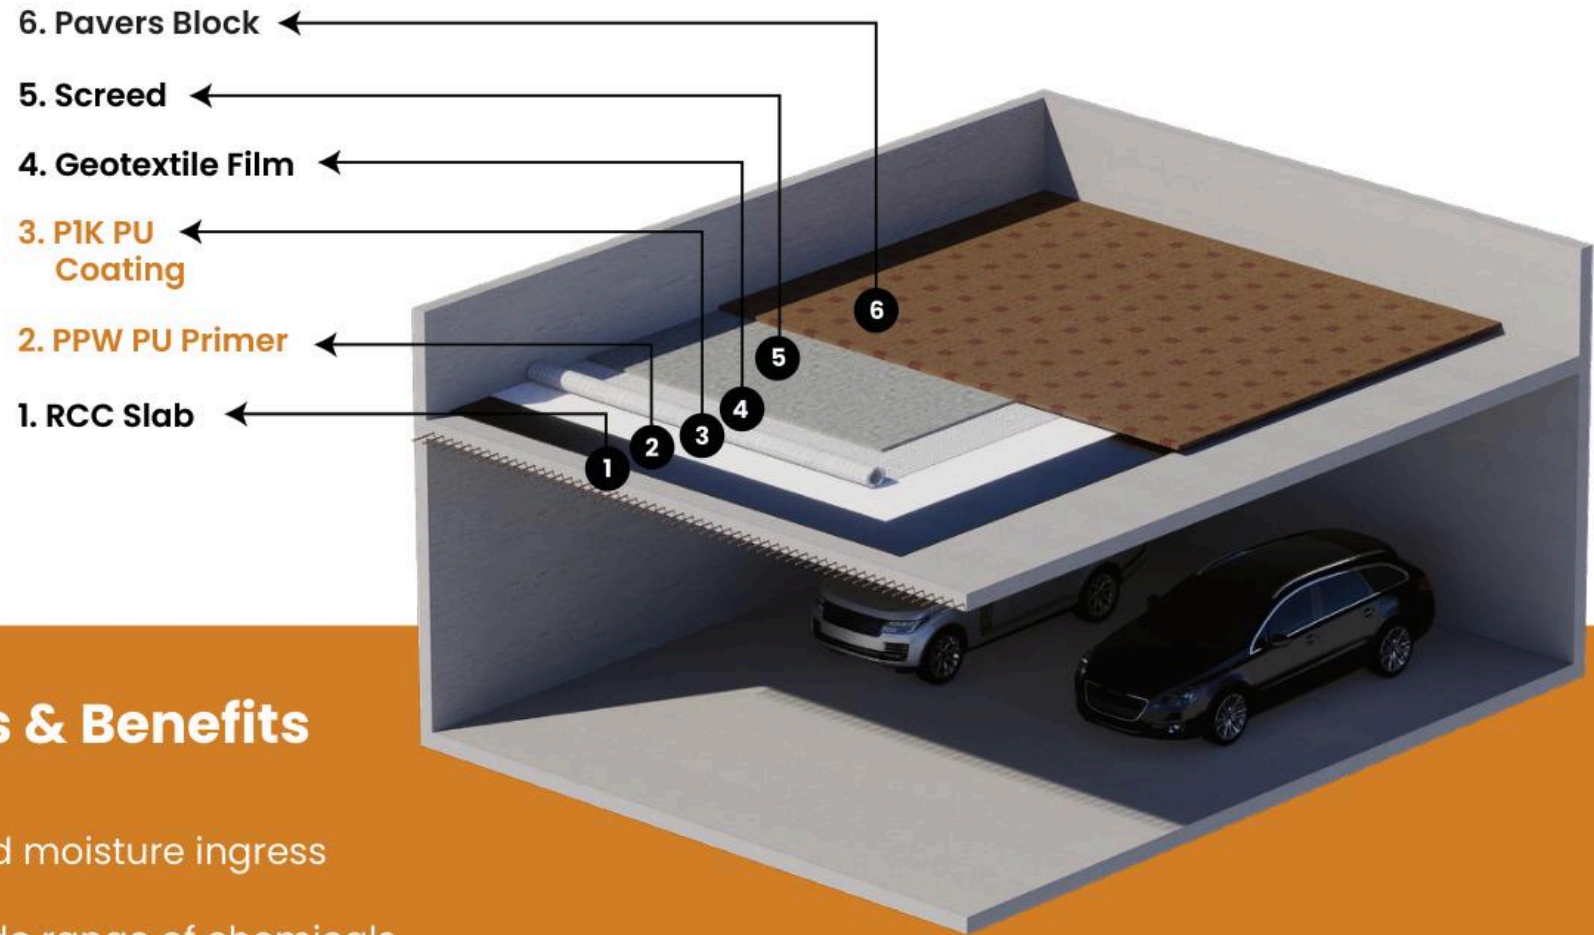


System Features & Benefits

- High solid content
- Prevents water, gas and moisture ingress
- High elongation
- Highly resistant to a wide range of chemicals
- Ensures high crack bridging ability
- High tensile strength
- Strong adhesion to concrete

Podium Application Area

Waterbodies

4. Tiles
3. Screed
2. C2K+ Premium
Cementitious 2K Coating
1. RCC Slab

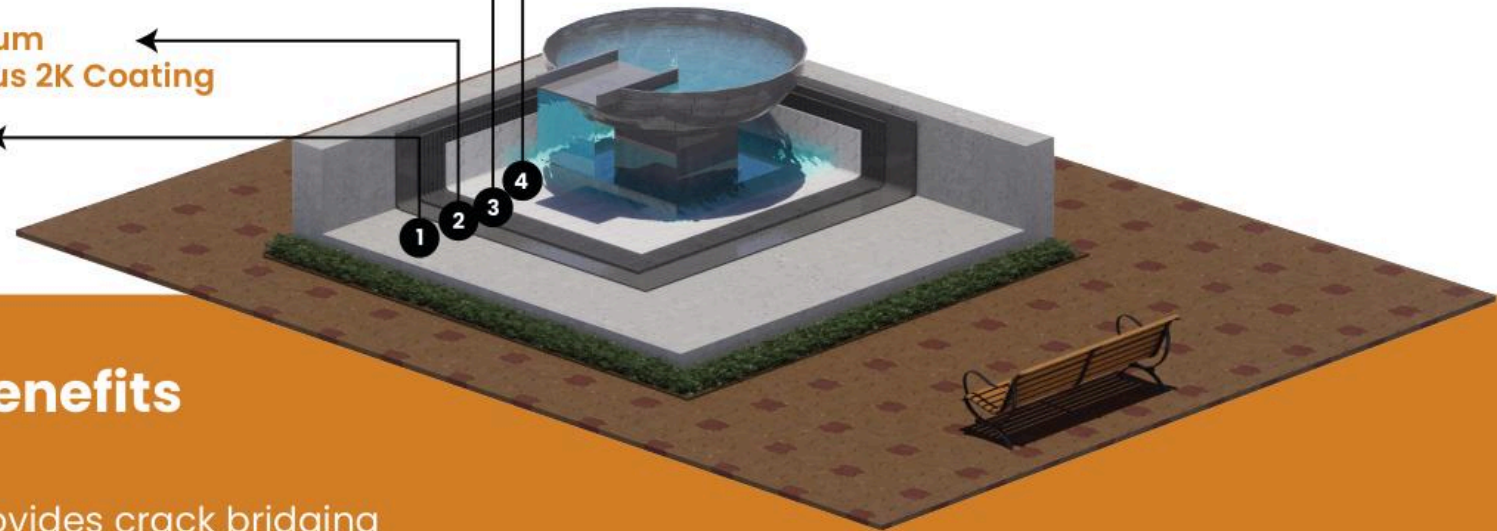

System Features & Benefits

- Mitigates the salt formation
- Highly elastomeric coating provides crack bridging
- 5 bar positive hydrostatic pressure
- Certified potable water safe
- Prevents water ingress
- Ensures adhesion to the concrete
- High tensile strength and elongation
- Upto 10 years of waterproofing warranty*




TERRACE

Terrace

Application Area

Commercial and Residential

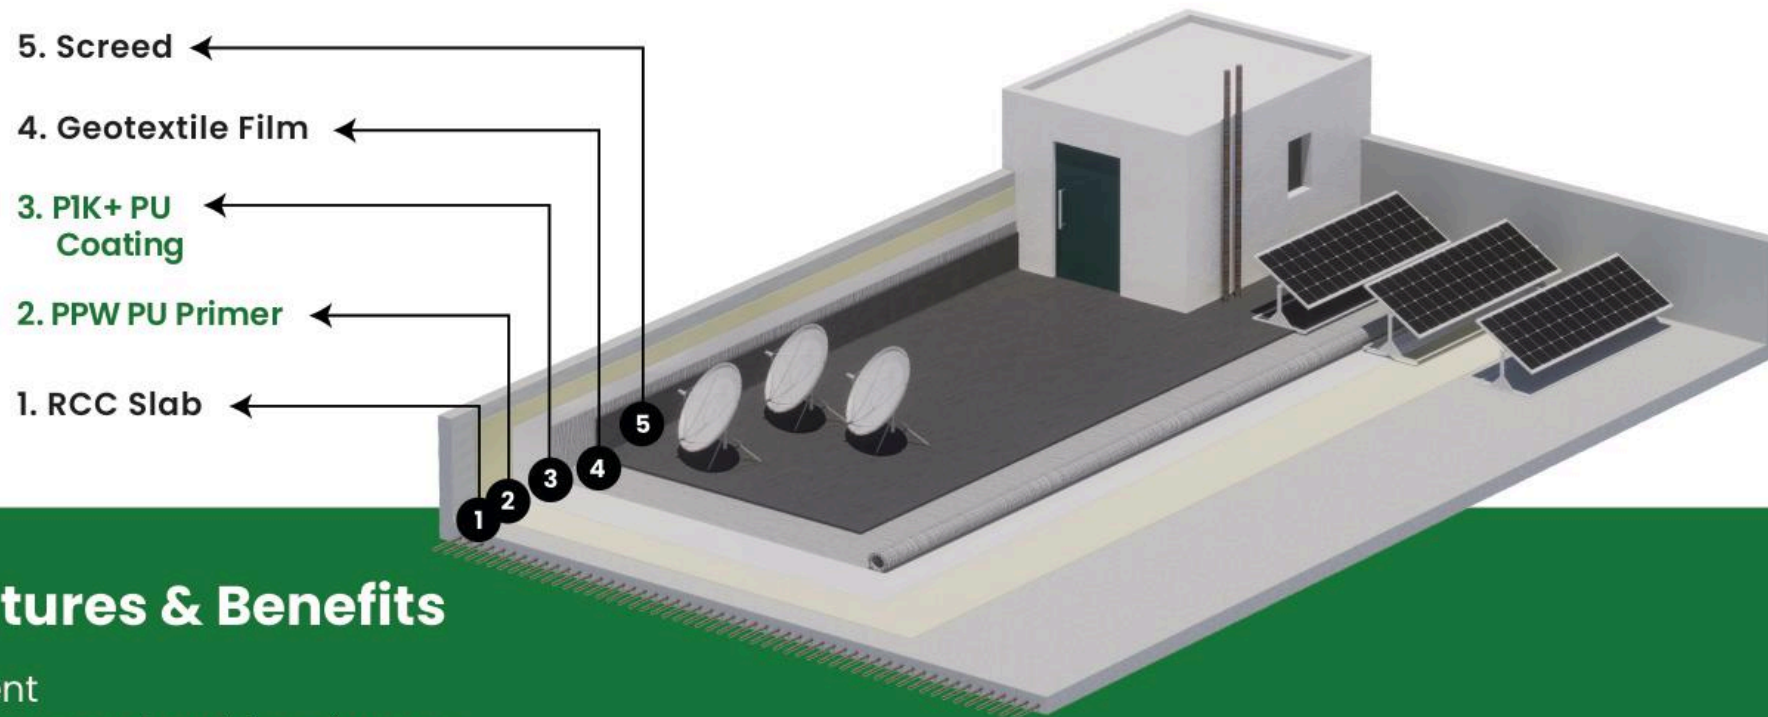

System Features & Benefits


- High solid content
- Prevents water, gas and moisture ingress
- High elongation
- Highly resistant to a wide range of chemicals
- Ensures high crack bridging ability
- High tensile strength
- Strong adhesion to concrete

Terrace

Application Area

Residential

(with less than 2000 sq.ft.)

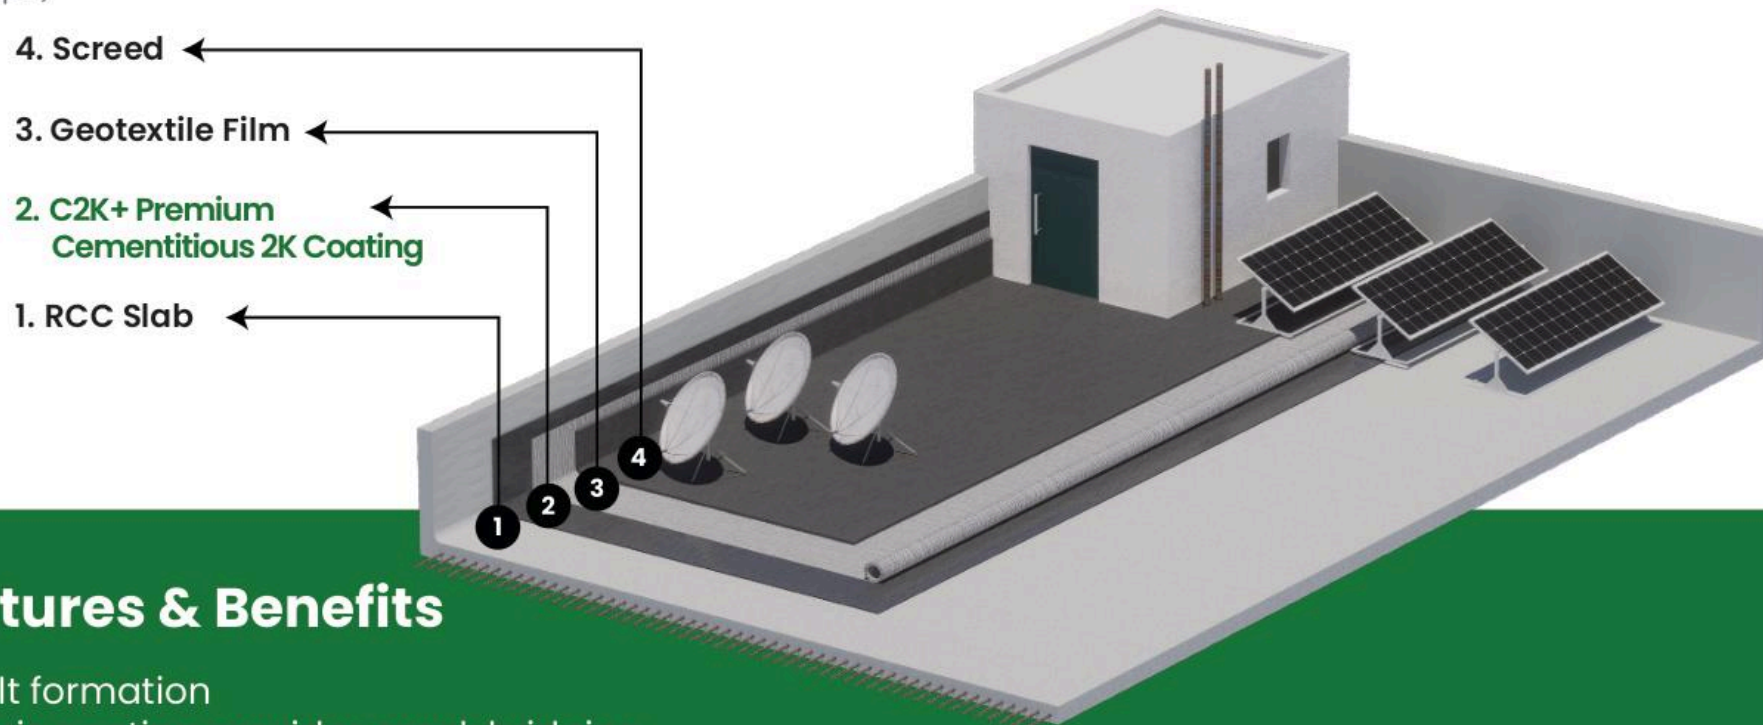

System Features & Benefits

- Mitigates the salt formation
- Highly elastomeric coating provides crack bridging
- Upto 5 bar positive hydrostatic pressure
- Certified potable water safe
- Prevents water ingress
- Ensures adhesion to the concrete
- High tensile strength and elongation
- Upto 10 years of waterproofing warranty*




WET AREAS

Bathroom Application Area

Wet Areas

7. Tiles + Tile Grouting
6. Tile Adhesive
5. Plaster
4. Brick Bat
3. Concrete Screed
2. C2K Cementitious Coating
1. RCC Slab

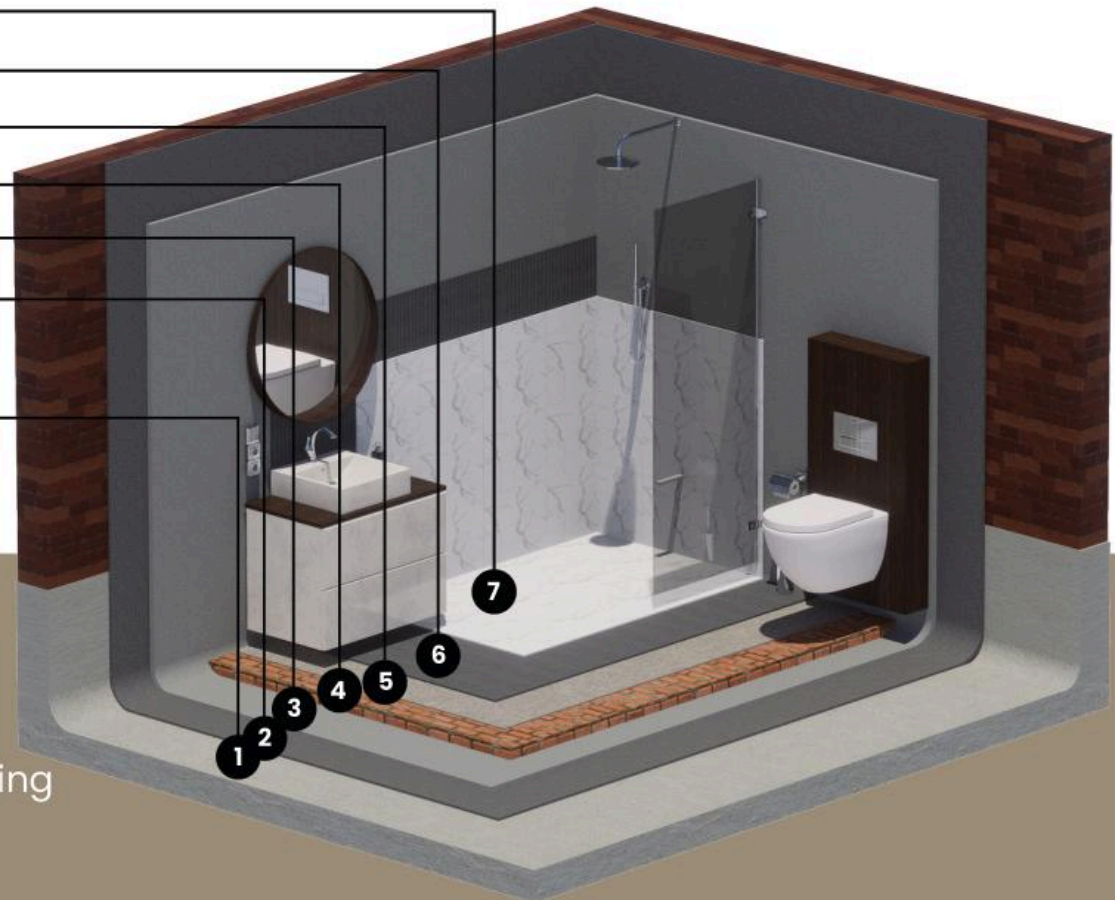

System Features & Benefits

- Mitigates the salt formation
- Highly elastomeric coating provides crack bridging
- Upto 5 bar positive hydrostatic pressure
- Certified potable water safe
- Prevents water ingress
- Ensures adhesion to the concrete
- High tensile strength and elongation
- Upto 7 years waterproofing warranty*



WATER TANK




Water Tank

Application Area

On Terrace

4. Food Grade Epoxy
3. Concrete Screed
2. C2K+ Premium
Cementitious 2K Coating
1. RCC Slab

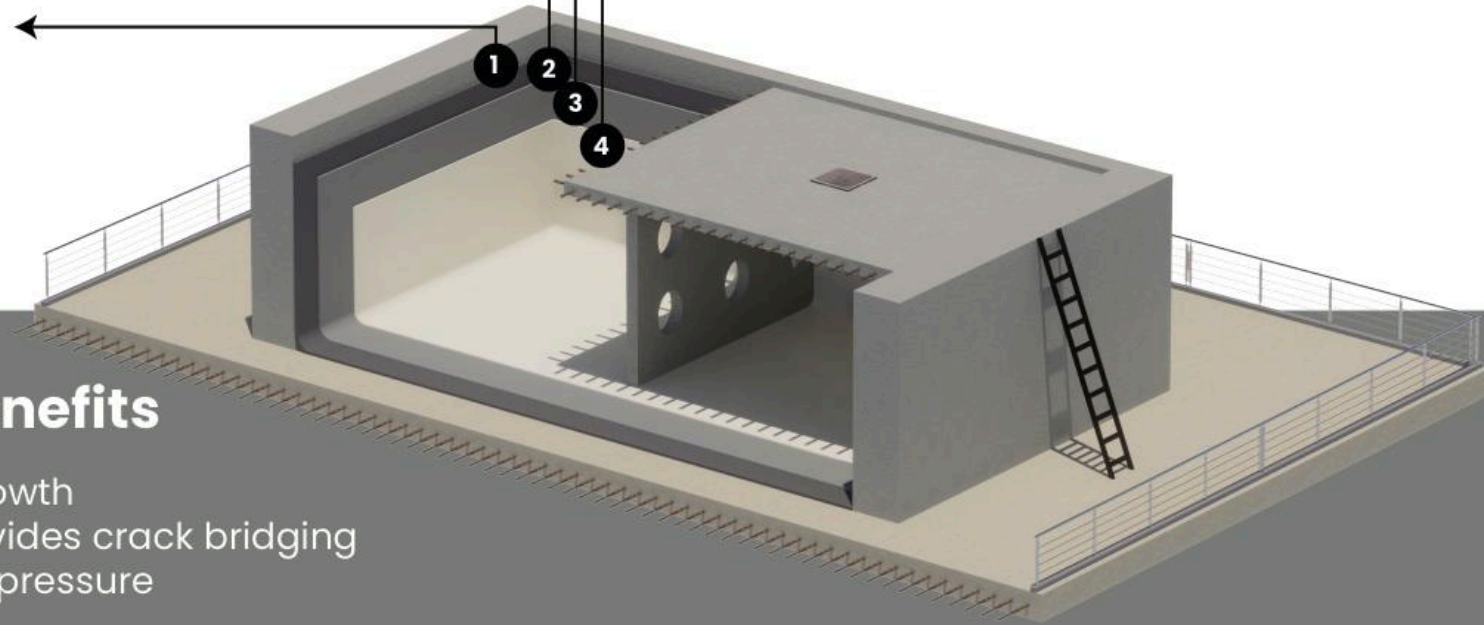

System Features & Benefits


- High resistance to microbial growth
- Highly elastomeric coating provides crack bridging
- Upto 5 bar positive hydrostatic pressure
- Potable water safe
- Prevents water, gas and moisture ingress
- Ensures adhesion to the concrete
- Upto 10 years of waterproofing warranty*

WIDE WATERPROOFING RANGE

ACRYLIC



CEMENTITIOUS

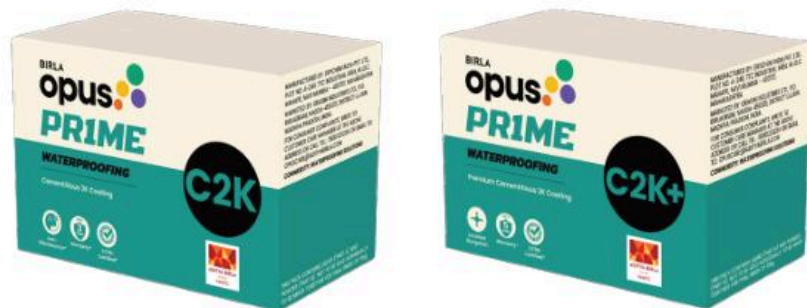

MEMBRANES

HDPE



APP




SBS



REPAIR



MEMBRANES

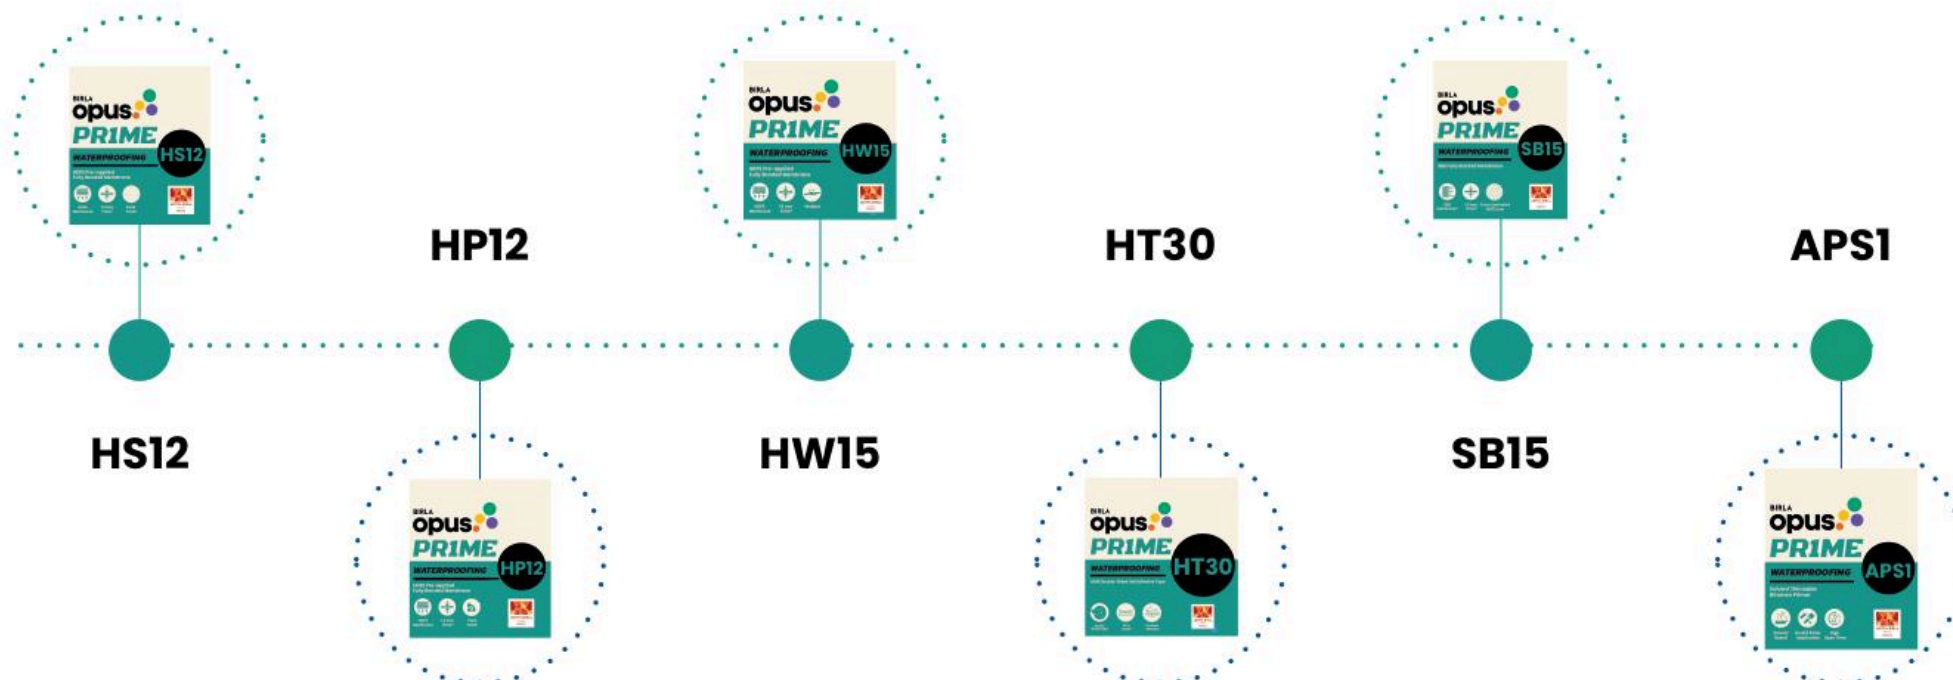

Waterproofing Membranes – HS12

Pre-applied Fully Bonded HDPE Membrane – 1.2mm Thick – Sand Finish

Birla Opus Prime HS12 HDPE Pre-applied Fully Bonded Membrane represents an innovative waterproofing solution crafted from high-density polyethylene (HDPE). This membrane comes with a pre-applied fully-formed adhesive layer and release liner on one side. Specifically designed for below-ground applications. It offers chemical and physical protection against water and water vapor, serving to safeguard structures for long period of time. The membrane is formulated with a specialized pressure sensitive adhesive which adheres to poured concrete, facilitating convenient application for rafts, retaining walls and underground structures.

PRODUCT FEATURES

Outstanding Tensile Strength	Excellent Adhesion to Poured Concrete	Excellent Puncture Resistance	Chemically Inert	Resistant to Chlorides, Sulphates, Alkalis and Acids
-------------------------------------	--	--------------------------------------	-------------------------	---

PRODUCT DETAILS

CHEMICAL BASE

HDPE membrane with adhesive layer at one side covered with engineered sand finish

APPEARANCE / COLOUR

White / Off-White

THICKNESS

1.2mm

PACKAGING

Roll Length	20m
Roll Width	1.2m

SHELF LIFE

12 months*

*When stored in a vertical position within a covered area. Avoid exposure to direct sunlight, UV radiation, and other heat sources.

AREAS OF APPLICATION

Birla Opus Prime HS12 is designed to protect concrete from water and dampness.

- Vertical and Horizontal Applications**
- Basements and below Ground Structures**
- Retaining Walls**
- Subways and Tunnels**

Waterproofing Membranes – HS12

Pre-applied Fully Bonded HDPE Membrane – 1.2mm Thick – Sand Finish

TECHNICAL INFORMATION*

Properties	Standard Values	Standard Test Method
Tensile Strength, MPa (Longitudinal)	25	ASTM D 412
Tensile Strength, MPa (Transverse)	25	ASTM D 412
Elongation at Break, % (Longitudinal)	500	ASTM D 412
Elongation at Break, % (Transverse)	500	ASTM D 412
Puncture Resistance, N	950	ASTM E 154
Resistance to Hydrostatic Head, m	71	ASTM D 5385
Peel Adhesion to Concrete, N/m	1200	ASTM D 903
Low Temperature Flexibility, °C	≤ -25	ASTM D 1970
Dimensional Stability	1% max.	ASTM D 1204
UV Resistance – 45 days	80% retention of Tensile & Elongation values	ASTM D 412
Water Vapour Permeance, Perms	≤ 0.10	ASTM E 96

*Certified by third party lab tests

Waterproofing Membranes – HP12

Pre-applied Fully Bonded HDPE Membrane – 1.2mm Thick – Plain Finish

Birla Opus Prime HP12 HDPE Pre applied Fully Bonded Membrane represents an innovative waterproofing solution crafted from high density polyethylene (HDPE). This membrane comes with a pre-applied fully-formed adhesive layer and release liner on one side. Specifically designed for below ground applications. It offers chemical and physical protection against water and water vapor, serving to safeguard structures for long period of time. The membrane is formulated with a specialized pressure sensitive adhesive which adheres to poured concrete, facilitating convenient application for rafts, retaining walls and underground structures.

PRODUCT FEATURES

Outstanding Tensile Strength	Excellent Adhesion to Poured Concrete	Excellent Puncture Resistance	Chemically Inert	Resistant to Chlorides, Sulphates, Alkalis and Acids
-------------------------------------	--	--------------------------------------	-------------------------	---

PRODUCT DETAILS

CHEMICAL BASE

HDPE sheet membrane with adhesive layer at one side covered with liner

APPEARANCE / COLOUR

White / Off-White

THICKNESS

1.2mm

PACKAGING

Roll Length	20m
Roll Width	1.2m

SHELF LIFE

12 months*

*When stored in a vertical position within a covered area. Avoid exposure to direct sunlight, UV radiation, and other heat sources.

AREAS OF APPLICATION

Birla Opus Prime HP12 is designed to protect concrete from water and dampness.

- Vertical and Horizontal Applications**
- Basements and below Ground Structures**
- Retaining Walls**
- Subways and Tunnels**

Waterproofing Membranes – HP12

Pre-applied Fully Bonded HDPE Membrane – 1.2mm Thick – Plain Finish

TECHNICAL INFORMATION*

Properties	Standard Values	Standard Test Method
Tensile Strength, MPa (Longitudinal)	28	ASTM D 412
Tensile Strength, MPa (Transverse)	28	ASTM D 412
Elongation at Break, % (Longitudinal)	550	ASTM D 412
Elongation at Break, % (Transverse)	550	ASTM D 412
Puncture Resistance, N	1000	ASTM E 154
Resistance to Hydrostatic Head, m	71	ASTM D 5385
Peel Adhesion to Concrete, N/m	1500	ASTM D 903
Low Temperature Flexibility, °C	≤ -25	ASTM D 1970
Dimensional Stability	1% max.	ASTM D 1204
UV Resistance – 45 days	80% retention of Tensile & Elongation values	ASTM D 412
Water Vapour Permeance, Perms	≤ 0.10	ASTM E 96

*Certified by third party lab tests

Waterproofing Membranes – HW15

Pre-applied Fully Bonded HDPE Membrane – 1.5mm Thick – Sand Finish – Weldable

Birla Opus Prime HW15 are pre-formed HDPE fully bonded weldable membranes consisting of a thick HDPE film, pressure-sensitive adhesive and weather-resistant protective coating. These membranes adhere to wet concrete poured onto them, creating a superior seal that efficiently halts lateral water movement. As a result, they prevent water from infiltrating the structure and prevent the tracking of water between the membrane and structure. Reinforcement can be placed directly on top of the membrane.

PRODUCT FEATURES

Outstanding Tensile Strength	Excellent Adhesion to Poured Concrete	Excellent Puncture Resistance	Heat Welded for Leak Proof Joints	Resistant to Chlorides, Sulphates, Alkalis and Acids
-------------------------------------	--	--------------------------------------	--	---

PRODUCT DETAILS

PRODUCT DETAILS		AREAS OF APPLICATION					
CHEMICAL BASE HDPE sheet membrane with adhesive layer and sand topping	PACKAGING <table><tr><td>Roll Length</td><td>20m</td></tr><tr><td>Roll Width</td><td>2.4m</td></tr></table>	Roll Length	20m	Roll Width	2.4m	Birla Opus Prime HW15 is designed to protect concrete from water and dampness.	
Roll Length	20m						
Roll Width	2.4m						
APPEARANCE / COLOUR White / Off-White	SHELF LIFE 12 months*	- Vertical and Horizontal Applications - Retaining Walls	- Basements and below Ground Structures - Subways and Tunnels				
THICKNESS 1.5mm	*When stored in a vertical position within a covered area. Avoid exposure to direct sunlight, UV radiation, and other heat sources.						

Waterproofing Membranes – HW15

Pre-applied Fully Bonded HDPE Membrane – 1.5mm Thick – Sand Finish – Weldable

TECHNICAL INFORMATION*

Properties	Standard Values	Standard Test Method
Tensile Strength, MPa (Longitudinal)	≥28	ASTM D 412
Tensile Strength, MPa (Transverse)	≥28	ASTM D 412
Elongation at Break, % (Longitudinal)	≥600	ASTM D 412
Elongation at Break, % (Transverse)	≥600	ASTM D 412
Low Temperature Flexibility	≤ -25°C, Pass	ASTM D 1970
Puncture Resistance	≥1100 N	ASTM E 154
Peel Adhesion to concrete, N/m	1800	ASTM D 903
Joint strength of weld, N/m	≥10000	ASTM D 1876
Resistance to Hydrostatic Head, m	≥71	ASTM D 5385
UV Resistance – 45 days	80% retention of Tensile & Elongation values	ASTM D 412
Overlap Width, mm	100	

*Certified by third party lab tests

Waterproofing Membranes – SB15

SBS Modified Cross Laminated HDPE Liner Membrane – 1.5mm Thick

Birla Opus Prime SB15 is a self-adhesive cold applied waterproofing membrane with SBS (styrene-butadiene-styrene) polymer modification, utilizing a tropical-grade polymer-modified bitumen. This bitumen compound is laminated onto a non-perforated, impervious, cross-laminated HDPE Liner. Birla Opus Prime SB15 meets the standards outlined in BS-8102.

PRODUCT FEATURES

Outstanding Tensile Strength	Excellent Adhesion to both Vertical and Horizontal Surfaces	High Lap Adhesion Strength	High Cold Flexibility	Resistant to Chlorides, Sulphates, Alkalis and Acids
-------------------------------------	--	-----------------------------------	------------------------------	---

PRODUCT DETAILS

CHEMICAL BASE SBS Membrane with self-adhesive HDPE Liner REINFORCEMENT Cross Laminated HDPE Liner APPEARANCE / COLOUR Black	PACKAGING <table> <tr> <td>Roll Length</td><td>10m</td></tr> <tr> <td>Roll Width</td><td>1m</td></tr> </table> SHELF LIFE 12 months* *When stored in a vertical position within a covered area. Avoid exposure to direct sunlight, UV radiation, and other heat sources.	Roll Length	10m	Roll Width	1m
Roll Length	10m				
Roll Width	1m				

AREAS OF APPLICATION

Birla Opus Prime SB15 is designed to protect concrete from water and dampness.

- Vertical and Horizontal Applications for Tanking Below Ground Structures
- Tunnels and other Underground Constructions
- Retaining Walls
- Subways

Waterproofing Membranes – SB15

SBS Modified Cross Laminated HDPE Liner Membrane – 1.5mm Thick

TECHNICAL INFORMATION*

Properties	Standard Values	Standard Test Method
Tensile Strength, N/mm ² (Longitudinal)	4	ASTM D 5147
Tensile Strength, N/mm ² (Transverse)	4	ASTM D 5147
Elongation, % (Longitudinal)	300	ASTM D 5147
Elongation, % (Transverse)	250	ASTM D 5147
Puncture resistance, N	>250	ASTM E-154
Adhesion to primed concrete, N/inch	50	ASTM D 903 : 1998
Lap Adhesion Strength, N/m	2100	ASTM D 1876
Tear resistance, N/mm (Longitudinal)	180	ASTM D 4073
Tear resistance, N/mm (Transverse)	180	ASTM D 4073
Dynamic Crack Bridging Ability	Pass	ASTM C 1305
Resistance to Hydrostatic Head @ 5 Bar	No leakage	ASTM D 5385
Cold Flexibility	No Crack seen @ -15 °C	ASTM D 5147

*Certified by third party lab tests

Waterproofing Membranes – APS1

Solvent Based Bitumen Primer For Bituminous Waterproofing Membrane

Bitumen Primer APS1 is a low-viscosity, solvent-based bitumen primer known for its quick drying properties. It serves as a primer coat on concrete and masonry surfaces, enhancing the adhesion of bitumen-based coatings and membranes. Bitumen Primer APS1 effortlessly penetrates concrete pores due to its low viscosity, fostering better adhesion between the concrete surface and the membrane. Moreover, it acts as a binder for dust particles present on the concrete surface, ensuring improved adhesion even after cleaning. Bitumen primer conforms to BS 3416, Type A Class C & ASTM D 41.

PRODUCT FEATURES

Cold Applied

**Acts as a Binder for
Dust Particles**

**Penetrates Porous
Substrates**

Enhances Adhesion

Anti-corrosive

PRODUCT DETAILS

PACKAGING

20 L

APPEARANCE / COLOUR

Liquid / Black

SHELF LIFE

12 months*

*When stored in dry conditions. Avoid exposure to direct sunlight, UV radiation, and other heat sources.

AREAS OF APPLICATION

- **Inverted Roofs and Parapets**
- **Bridges and Tunnels**
- **Terraces, Balconies and Roof Gardens**
- **Concrete Foundations, Basements and Isolated Footings**
- **Sunken Slabs and Swimming Pools**
- **Car Park and Irrigation Canal Lining**

Waterproofing Membranes – APS1

Solvent Based Bitumen Primer For Bituminous Waterproofing Membrane

TECHNICAL INFORMATION*

Properties	Standard Values
Drying Time	6-8 Hours
Coverage	4-6 sq. m/L per coat. Coverage may vary depending on the porosity of the substrate.
Density, g/cc	0.8 - 1.1
Solid Content, %	52 - 56
Application Temperature, °C	5°C to 55°C

*Certified by third party lab tests

Waterproofing Membranes – HT30

HDPE Double-sided Self Adhesive Tape

Birla Opus Prime HT30 HDPE Double-sided Self Adhesive Tape is applied at ambient temperature, featuring pressure-sensitive adhesive and has release liners on both sides. Its offers excellent adhesion to Birla Opus Prime HS12 / HP12 / HW15 Pre-applied HDPE waterproofing membranes and concrete surfaces.

PRODUCT DETAILS

APPEARANCE / COLOUR

**White Liner / Opaque Layer
Inside**

SHELF LIFE

12 months*

*Avoid exposure to direct sunlight, UV radiation, and other heat sources.

PACKAGING

Roll Length	30m
Roll Width	100mm

CHEMICAL BASE

Standard roll with liner on both sides

PRODUCT DETAILS

COMPATIBLE PRODUCTS WITH HT30 HDPE DOUBLE-SIDED SELF ADHESIVE TAPE

- Birla opus Prime HP12 Pre-applied fully bonded HDPE membrane – Plain Finish
- Birla opus Prime HS12 Pre-applied fully bonded HDPE membrane – Sand Finish
- Birla opus Prime HW15 Pre-applied fully bonded HDPE membrane – Sand Finish – Weldable

TECHNICAL INFORMATION*

Properties	Standard Values
Flexibility at lower temperatures, -25 °C	No Cracking
Peel adhesion Strength, with HDPE membrane, N/m	1300

ACRYLIC WATERPROOF COATING



B30

B70



B90



Waterproofing – B30

Acrylic Waterproof Coating

Birla Opus Prime B30 Waterproof Coating is an acrylic waterproof coating designed for application on both horizontal and vertical walls. It provides excellent crack-bridging and water-resistant properties, reinforcing the protection of exterior surfaces.

PRODUCT FEATURES



HYDROSTATIC PRESSURE

Safeguards against positive hydrostatic pressure of up to **5 Bar***.



EXCELLENT CRACK BRIDGING ABILITY

Highly elastomeric coating provides crack bridging of upto 1 mm on horizontal surfaces and upto 0.5mm on vertical surfaces*.



EXCELLENT ADHESION

Forms a robust bond between the coating film and the substrate enhancing longevity, stability, and overall performance.



EXCELLENT FLEXIBILITY

Offers elongation upto 170% on horizontal surfaces and upto 100% on vertical surfaces* preventing cracks.



WARRANTY*

Up to 5-year waterproofing system warranty on horizontal and vertical applications.

*T&C apply. For more details, please refer to the product warranty document.

PRODUCT DETAILS

AVAILABLE PACKS



COLOURS AVAILABLE

WHITE

SHELF LIFE



36 months from the date of manufacture.

AREAS OF APPLICATION



Can be used on exterior horizontal surfaces like building roof, terrace, parapet, sunshade and vertical exterior masonry walls. It can also be applied on existing brick bat coba or IPS flooring

Waterproofing – B30

Acrylic Waterproof Coating

TECHNICAL INFORMATION*

Properties	Standard Values
Appearance	Viscous Liquid
Color	White
% Elongation	Upto 170% on horizontal surfaces and upto 100% on vertical surfaces
Tensile Strength	Upto 2.5mpa
Resistance to Positive hydrostatic pressure	Upto 5 bar passes
Specific Gravity	1.3 +- 0.04g/cc l
Solids by wt, %.	54-60

*Certified by third party lab tests



Waterproofing – B70

Luxury Acrylic Waterproof Coating

Birla Opus Prime B70 Luxury Waterproof Coating is an elastomeric coating that provides excellent waterproofing properties, high durability, and resistance to water penetration for wall & terrace surfaces. The elastic cross-linking mechanism of the polymer along with the acrylic fibres gives additional reinforcement to the film.

PRODUCT FEATURES



HYDROSTATIC PRESSURE

Shields against positive hydrostatic pressure of up to **10 Bar*** thus preventing water penetration into the film.



EXCELLENT CRACK BRIDGING ABILITY

Highly elastomeric coating provides crack bridging of up to 2 mm*.



SURFACE TEMPERATURE REDUCTION

Provides excellent surface temperature reduction up to **10° C***.



ANTI-CARBONATION

Coating acts as an effective barrier against carbon dioxide thus protecting the rebars against corrosion.



WARRANTY*

11 years warranty on vertical applications and 10 years warranty on horizontal applications*.

*T&C apply. For more details, please refer to the product warranty document.

PRODUCT DETAILS

AVAILABLE PACKS



COLOURS AVAILABLE

WHITE

SHELF LIFE



36 months from the date of manufacture.

AREAS OF APPLICATION



Can be used on exterior horizontal surfaces like building roof, terrace, parapet, sunshade and vertical exterior masonry walls. It can also be applied on existing brick bat coba or IPS flooring

Waterproofing – B70

Luxury Acrylic Waterproof Coating

TECHNICAL INFORMATION*

Properties	Standard Values
Appearance	Viscous Liquid
Color	White
Anti Carbonation, R Value (EN 1062 Part 6:2002-Method A)	460
Tensile Strength	Upto 2.7 mpa
Crack Bridging Ability	Up to 2 mm
Solar reflectance index*	Greater than 100
% Elongation	Up to 250
Resistance to Positive hydrostatic pressure	Passes up to 10 bar
Specific Gravity	1.24 +- 0.04 g/cc
Solids by wt, %.	54-60

*Surface temperature reduction: Temperature recorded from 1 pm to 3 pm with the help of IR gun. Degree of surface temperature reduction will vary depending upon the surface & weather conditions.

*Certified by third party lab tests

Waterproofing – B90

Ultra Luxury Acrylic Waterproof Coating



Birla Opus Prime B90 Ultra Luxury Waterproof Coating is a specialized waterproofing formulation comprising of tough acrylic and PU hybrid polymers. The incorporation of a unique elastomeric structure, combined with acrylic fibres, enhances the film's strength and provides cooler exterior surfaces.

PRODUCT FEATURES



HYDROSTATIC PRESSURE

Protects against positive hydrostatic pressure of upto **12 Bar*** thus preventing infiltration of water into the film.



OUTSTANDING CRACK BRIDGING ABILITY

Highly elastomeric PU hybrid polymer provides crack-bridging of up to **3 mm***.



SURFACE TEMPERATURE REDUCTION

Provides outstanding surface temperature reduction upto **12° C***.



ANTI-CARBONATION

Coating serves as a robust barrier against carbon dioxide thereby safeguarding the rebars from corrosion.



WARRANTY*

14 years warranty on vertical applications and 12 years warranty on horizontal applications*.

*T&C apply. For more details, please refer to the product warranty document.

PRODUCT DETAILS

AVAILABLE PACKS



COLOURS AVAILABLE

WHITE

SHELF LIFE



36 months from the date of manufacture.

AREAS OF APPLICATION



Can be used on exterior horizontal surfaces like building roof, terrace, parapet, sunshade and vertical exterior masonry walls. It can also be applied on existing brick bat coba or IPS flooring

Waterproofing – B90

Ultra Luxury Acrylic Waterproof Coating

TECHNICAL INFORMATION*

Properties	Standard Values
Appearance	Viscous Liquid
Color	White
Tensile Strength	Upto 3.2 mpa
Crack Bridging Ability	Up to 3 mm
Solar reflectance index*	Greater than 100
% Elongation	Up to 300
Resistance to Positive hydrostatic pressure	Passes up to 12 bar
Specific Gravity	1.15 +- 0.04 g/cc
Solids by wt, %.	50-56

*Surface temperature reduction: Temperature recorded from 1 pm to 3 pm with the help of IR gun. Degree of surface temperature reduction will vary depending upon the surface & weather conditions.

*Certified by third party lab tests

CEMENTITIOUS WATERPROOF COATING



C2K

C2K+



Waterproofing – C2K

Cementitious 2K Coating



Birla Opus Prime C2K is a two-component acrylic cementitious, polymer modified elastomeric waterproof coating. It is composed of cement with properly graded sand and selected additives as one part & an acrylic emulsion as a binder in its second part. It is applied for protection & waterproofing of concrete and masonry substrates.

PRODUCT FEATURES



POTABLE WATER SAFE*

Product conforms to overall migration test specifications as per USFDA-175:300 conducted by CFTRI for intended use for contact with potable water.



ANTI-EFFLORESCENCE*

Mitigates the salt formation on the surface maintaining the integrity and overall finish.



CRACK BRIDGING ABILITY

Highly elastomeric coating provides crack bridging of up to 1.2 mm.



WARRANTY*

Up to 7 years waterproofing warranty*

*T&C apply. For more details, please refer to the product warranty document.

PRODUCT DETAILS

AVAILABLE PACKS

15kg



COVERAGE

Estimated forced coverage:

7 – 8 sq.ft/kg for 2 coats**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity. One should ensure coverage is not higher than the one prescribed above for optimal performance.

COLOURS AVAILABLE

GREY

SHELF LIFE



12 months
from the date
of manufacture

Waterproofing – C2K

Cementitious 2K Coating

AREAS OF APPLICATION



Old & New Concrete,
Plaster &
Masonry surfaces



Bathrooms, Kitchens,
Balconies



Small Terraces
(<2000 sq.ft), Chhajjas
& Sinks



Concrete
Water Tanks

TECHNICAL INFORMATION*

Properties	Observations / Results	Specification
Mixing ratio (Liquid : Powder)	1:2	---
Surface dry time	40 - 50 mins	ASTM C 1640
Recoat time	4 - 6 hours	ASTM C 1640
Pot Life@27°C	Min 45 mins	---
Dry Film Thickness	1 mm	ASTM D 1005
% Elongation at break	up to 100	ASTM D 2370
Tensile strength	0.9 N/mm ²	ASTM D 2370
Positive Hydrostatic Pressure	up to 5 bar	EN12390-8
Negative Hydrostatic Pressure	up to 4 bar	ASTM D 7088
Crack Bridging ability	Upto 1.2 mm	EN 1062-7(A)
Pull off adhesion strength	Upto 1 mpa	ASTM D 7234
Food grade certification	POTABLE WATER SAFE*	(As per US FDA - 175.300)

*Certified by third party lab tests

Waterproofing – C2K+

Premium Cementitious 2K Coating



Birla Opus Prime C2K+ is a two-component high performance acrylic cementitious, polymer modified elastomeric, waterproofing & protective coating. It is composed of high quality cement with properly graded sand, selected additives as one part & an acrylic emulsion as a binder in its second part. It is applied for protection & waterproofing of water retaining structures like swimming pools etc.

PRODUCT FEATURES



POTABLE WATER SAFE*

Product conforms to overall migration test specifications as per USFDA-175:300 conducted by CFTRI for intended use for contact with potable water.



EXCELLENT ELONGATION

Offers elongation up to 200% for vertical surfaces preventing cracks.



EXCEPTIONAL CRACK BRIDGING ABILITY

Highly elastomeric coating provides crack bridging of up to 2 mm.



WARRANTY*

Up to 10 years waterproofing warranty*

*T&C apply. For more details, please refer to the product warranty document.

PRODUCT DETAILS

AVAILABLE PACKS

12kg



COVERAGE

Estimated forced coverage:

5.4 – 6.4 sq.ft/kg for 2 coats**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity. One should ensure coverage is not higher than the one prescribed above for optimal performance.

COLOURS AVAILABLE

GREY

SHELF LIFE



12 months
from the date
of manufacture

Waterproofing – C2K+

Premium Cementitious 2K Coating

AREAS OF APPLICATION



Old & New Concrete,
Plaster & Masonry
surfaces that is
subjected to damage
due to moisture.



Swimming Pools,
Reservoirs, Water Tanks.



Terraces, Life Pits &
Basement Walls.



Toilets, Bathrooms &
Balconies

TECHNICAL INFORMATION*

Properties	Observations / Results	Specification
Mixing ratio (Liquid : Powder)	60:40	---
Surface dry time	50 mins	ASTM C 1640
Recoat time	4 - 6 hours	ASTM C 1640
Pot Life@27°C	40 mins	---
Dry Film Thickness	1 mm	ASTM D 1005
% Elongation at break	up to 200	ASTM D 2370
Tensile strength	1.03 N/mm ²	ASTM D 2370
Positive Hydrostatic Pressure	up to 5 bar	EN12390-8
Negative Hydrostatic Pressure	up to 4 bar	ASTM D 7088
Crack Bridging ability	Upto 2 mm	EN 1062-7(A)
Pull off adhesion strength	Upto 1.2 mpa	ASTM D 7234
Food grade certification	POTABLE WATER SAFE*	(As per US FDA - 175.300)

*Certified by third party lab tests



EXECUTION

Execution Support



Site Inspection

Our experts visit the site to identify potential issues and recommend tailored solutions



Progress Updates

Monitoring the application process to ensure adherence to specifications and industry standards



Technical Drawings

Detailed drawings for better understanding of the layering



Skilled Contractors

Selected panel of experienced contractors to help you with expert advices and industry insights on each product application system



On Site Training

Providing hands-on training, sampling, and supervision to ensure right system is executed successfully



Handover Reports

Providing records of each phase of the system application for warranty and quality purposes

Prime Services

More Success. Less Stress.

PRIME PRIVILEGE

- Dedicated Sampler Packs
- Best-in-Class Warranty

PRIME CONNECT

- Customized Engagement Programs
- Dedicated Social Media Handles
- Exclusive Institutional Website
- Customer Centric Apps

