



**LARGE USERS
BUSINESS**

**DR.
FIXIT®**

PRODUCT SUMMARY GUIDE



COMPANY PROFILE

Pidilite Industries Limited is a leading manufacturer of adhesives and sealants, construction chemicals, craftsmen products, DIY (Do-It-Yourself) products and polymer emulsions in India. Our products range also includes paint chemicals, automotive chemicals, art materials and stationery, fabric care, maintenance chemicals, industrial adhesives, industrial resins and organic pigments & preparations. Most of the products have been developed through strong in-house R&D. Our brand name Fevicol has become synonymous with adhesives to millions in India and is ranked amongst the most trusted brands in the country. Some of our other major brands are M-Seal, Fevikwik, Fevistik, Roff, Dr. Fixit, Fevicryl, Motomax, Hobby Ideas, Araldite.

CONSTRUCTION CHEMICALS DIVISION

Pidilite Large Users Business (PLUB) mission is to promote appropriate construction chemical solutions based on structural requirement and provide a bundle of solutions/systems with high quality of application by trained & expert applicators. Pidilite has a wide distribution network and trained applicators who provide customers suitable services to ensure best in-class construction.

Pidilite, with its **brand Dr. Fixit®**, is the pioneer of waterproofing in India. It offers comprehensive waterproofing solutions for all structures including commercial and residential buildings, tunnels, bridges and prominent government buildings.

OUR BRANDS

CONSTRUCTION
CHEMICALS



UnoFin

WalAce

DR. FIXIT® EXPERTISE IN WATERPROOFING SOLUTIONS

Dr. Fixit® has been a pioneer in modernizing & upgrading waterproofing practices in India with decades of experience in executing small to large to mega projects. Dr. Fixit offers the widest range of products & technologies, specification expertise and highly capable application services to our customers & partners as below.

1. Versatile range of products to suit various design needs and project site conditions

- a Pressure sensitive adhesive fully bonded HDPE membranes
- b. Liquid applied systems -Polyurethane, Polyurea, Acrylics
- c. TPO and KEE membranes for roofs
- d. SBS modified self-adhesive membranes
- e. Integral crystalline admixtures
- f. Self-healing membranes
- g. Tank coatings
- h. Polymer modified cementitious coatings
- i. Acrylic wall coatings
- j. Detailing strips, Injectable hoses, Swellable plugs and bars
- k. Polyurethane, Polysulphide & Silicon sealants
- l. Injection grouts

2. Expertise of system configurations built on vast learning experiences of more than 25 mill. sqm. of waterproofing projects handled in last 5 years

- a Our system design approach is based on • Water-table conditions • Intended usage of space • Design service life • Risk assessment • Constructability
- b. System prescriptions comply to IS, NBC & relevant national and international standards.
- c. Product test certifications comply to international standards (EN, ASTM, BBA, ETAG, CE).

3. Best in industry technical support and application support from

- a In-house installation services company and vast network of trained partner applicators
- b. Regular trainings & orientations of client engineers & supervisors on waterproofing technologies & application quality
- c. On-site audit services on quality of application

Visit our Dr. Fixit® Experience Centres in Mumbai, Chennai, Kochi and Delhi to learn more.



CONTENTS

WATERPROOFING	PRODUCT SELECTION CHART	7
	DR. FIXIT PREBOND W & DR. FIXIT PREBOND PRO	8
	DR. FIXIT PREBOND S & DR. FIXIT PREBOND E	9
	DR. FIXIT AMPHIBIA 3000 GRIP 1.3 & DR. FIXIT SAMSHIELD XL 1500/2100	10
	DR. FIXIT SAMSHIELD P 1500 & DR. FIXIT SAMSHIELD PS 2100/3500	11
	DR. FIXIT POLYPLUS CP & DR. FIXIT POLYPLUS CP ADMIX	12
	DR. FIXIT FLEXI PU 270 (I) & DR. FIXIT SUPERSEAL 4500	13
	DR. FIXIT SUPERSEAL 500 & DR. FIXIT SUPERSEAL 900	14
	DR. FIXIT SUPERSEAL TC 1000 ULTRA & DR. FIXIT PIDIFIN 2K	15
	DR. FIXIT FASTFLEX & DR. FIXIT FASTFLEX ULTRA	16
	DR. FIXIT BATHSEAL SELECT & DR. FIXIT TANKPRO W	17
	DR. FIXIT TANKPRO E & DR. FIXIT DAMPGUARD CLASSIC	18
	DR. FIXIT COAL TAR EPOXY & DR. FIXIT FLEXSHIELD TPO	19
BUILDING ENVELOPE INSULATION SYSTEMS	DR. FIXIT FIBERTITE & DR. FIXIT ROOFSEAL SELECT	20
	DR. FIXIT ROOFSEAL CLASSIC & DR. FIXIT ROOFSEAL ULTRA	21
	DR. FIXIT COOLROOF COATING & DR. FIXIT TORCHSHIELD P 3160/P 4160	22
EXTERNAL WALL WATERPROOFING, DECORATIVE AND PROTECTIVE COATING	PRODUCT SELECTION CHART	25
	WALACE EIFS & DR. FIXIT FOAMSHIELD	26
	DR. FIXIT BLUESEAL	27
	DR. FIXIT RAINCOAT & DR. FIXIT RAINCOAT WATERPROOF COATING	29
	DR. FIXIT RAINCOAT STAR & DR. FIXIT RAINCOAT NEO	30
PRIMERS FOR WATERPROOFING, DECORATIVE & PROTECTIVE COATINGS	DR. FIXIT RAINCOAT CLASSIC & DR. FIXIT RAINCOAT SELECT TOP COAT	31
	DR. FIXIT CONCRETE GUARD WB & DURATHANE 100 EA	32
	DR. FIXIT CIPOXY 16 D & DR. FIXIT TORCHSHIELD PRIMER	33
	DR. FIXIT PRIMESEAL PRIMER & DR. FIXIT PRIMER AC	36
GROUTS	DR. FIXIT PRIMESEAL PLUS & DR. FIXIT SUPERSEAL P 200 WB	37
	DR. FIXIT PRIMO WHITE & DR. FIXIT PRIMO PUTTY	38
	PRODUCT SELECTION CHART	39
SEALANTS	PAGEL V1/50 & DR. FIXIT PIDIGROUT 10M	41
	CIPOGROUT 1000	42
	PRODUCT SELECTION CHART	43
	DR. FIXIT PIDISEAL PS 41G & DR. FIXIT PIDISEAL PS 42P	45
	DR. FIXIT PIDISEAL PS 43 & FEVISEAL HY 200	46
REPAIR AND REHABILITATION	FEVISEAL HY 300 & FEVISEAL HY 100	47
	FEVISEAL WEATHERPROOF PRO & FEVISEAL NEUTRAL PRO	48
	DR. FIXIT SILICONE SEALANT & DR. FIXIT PIDIPRIME A	49
	PRODUCT SELECTION CHART	50
	DR. FIXIT TRIFLEX PRO DETAIL & DR. FIXIT TRIFLEX PROTECT	53
	DR. FIXIT TRIFLEX SMARTTEC & DR. FIXIT MICRO CONCRETE	54
	DR. FIXIT REPAIR PRO POLYMER MORTAR HB & DR. FIXIT REPAIR POLYMER MORTAR	55
	DR. FIXIT PU PLAIN INJECTION & DR. FIXIT PU FOAM INJECTION	56
	DR. FIXIT EPOXY INJECTION GROUT & DR. FIXIT INJECT AC 300-HP	57
	DR. FIXIT PIDICRETE AM & DR. FIXIT EPOXY BONDING AGENT	58
	DR. FIXIT CRACK-X-SHRINKFREE & DR. FIXIT CRACK-X-PASTE	59
	DR. FIXIT CRACK-X-POWDER & DR. FIXIT PIDICRETE MPB	60
	DR. FIXIT ZINC RICH PRIMER DR. FIXIT RUST REMOVER	61
OTHER ANCILLARY PRODUCTS	DR. FIXIT INSTANT LEAK PLUG & DR. FIXIT PIDICRETE URP	62
	DR. FIXIT PIDITOP 333 & DR. FIXIT REPELLIN WR	63
	DR. FIXIT CURING COMPOUND & DR. FIXIT POLYBAR PLUS	66
	DR. FIXIT PIDIPROOF LW + & DR. FIXIT PLASTER MASTER	67
	DR. FIXIT ALL SEAL & DR. FIXIT SEAL TAPE	68
	DR. FIXIT TAPE ADHESIVE & DR. FIXIT CORNER JOINT TAPE	69
	DR. FIXIT PIPE COLLAR & DR. FIXIT PREBOND DS TAPE	70
	DR. FIXIT BATHSEAL TAPE	71
		72

WATERPROOFING



Sr. No.	Product Name	WATERPROOFING									
		SUBSTRUCTURE WATERPROOFING		PODIUM/TERRACE WATERPROOFING				WET AREAS		STP/ETP	POTABLE WATER TANK
		Footing base slab / Raft	Confined retaining walls	Unconfined retaining walls	Conventional RCC	Composite Deck Slab	Precast Slab	Metal Sheet Roofing	Sunken Slab	Flat Slab	

1	Dr. Fixit Prebond W	■									
2	Dr. Fixit Prebond Pro/S/E	■	■								
3	Dr. Fixit Amphibia 3000 Grip 1.3		■								
4	Dr. Fixit Samshield Series (SBS Membrane)			■							
5	Dr. Fixit Polyplus CP	■		■							
6	Dr. Fixit Polyplus CP Admix	■	■	■							
7	Dr. Fixit Flexi PU 270 (i)				■						
8	Dr. Fixit Superseal 4500 PUH			■	■	■	■				
9	Dr. Fixit Superseal 900				■	■	■				
10	Dr. Fixit Superseal 500				■						
11	Dr. Fixit Superseal TC 1000 Ultra (Aliphatic TopCoat)				■	■	■				
12	Dr. Fixit Pidifin 2K								■		
13	Dr. Fixit Fastflex								■		■
14	Dr. Fixit Fastflex Ultra								■		■
15	Dr. Fixit Bathseal Select									■	■
16	Dr. Fixit TankPro W										■
17	Dr. Fixit TankPro E									■	
18	Dr. Fixit Dampguard Classic										■
19	Dr. Fixit Coal Tar Epoxy									■	
20	Dr. Fixit Flexshield TPO							■			
21	Dr. Fixit Fibertite				■	■	■	■			
22	Dr. Fixit Roofseal Series				■						
23	Dr. Fixit Cool Roof coating							■			
24	Dr. Fixit Torchshield P 3160/P 4160	■			■						

1.1 Dr. Fixit Prebond W



Important Technical parameters

Tensile Strength	25 MPa / 28 MPa
Elongation	500%
Puncture Resistance	1000 N / 1500 N
Lap Peel Adhesion	>15000 N/m

Pre-Applied Fully Bonded HDPE Weldable PSA Membrane

Dr. Fixit Prebond W is a preformed and pre- applied HDPE fully bonded weldable membrane that bonds to the wet concrete cast on the membrane, conforming to IS 16471:2017 & BS 8102:2009 recommendations for providing Type A protection.

Typical Applications

- Basements
- Subway and UG metro Stations
- Cut and cover tunnels
- Caverns & Other underground civil structures

Packaging

Roll size of 20m length and 2.4 meters width at a composite thickness of 1.5 mm & 1.8 mm.

Features

- Hot welded side and end laps: 10 times increase in lap adhesion strength compared to conventional overlapping method.
- Wider membranes (Width up to 2.4 m) – Reduces > 50% of joint area.
- Enhanced puncture resistance.
- Joints can be tested through electric spark test to ensure watertightness.

1.2 Dr. Fixit Prebond Pro



Important Technical parameters

Tensile Strength	25 Mpa
Elongation	500%
Puncture Resistance	1000 N
Lap Peel Adhesion	1500 N/m

Pre-applied fully bonded HDPE PSA membrane with two side lap

Dr. Fixit Prebond Pro membrane is a 1.5mm composite thick preformed HDPE fully bonded membrane with sand finish and two-side lap. It is designed with double side adhesive which improves overlapping strength significantly.

Typical Applications

- Basements rafts
- Confined retaining walls
- Subway and UG metro Station
- Cut and cover tunnels & Other underground civil structure

Packaging

Roll size of 20m length and available in 1meter and 2-meter roll widths with a composite thickness of 1.5mm.

Features

- Two side lap makes the joints more robust.
- Achieves effective bonding at overlaps even under harsh application conditions like rains, water etc.
- High UV resistance up to 45 days. CE Certified.
- Resistant to aggressive ground water conditions.

1.3 Dr. Fixit Prebond S



Important Technical parameters

Tensile Strength	25 MPa/28 MPa
Elongation	500%
Puncture Resistance	1000 N/ 1500 N
UV Exposure limit	45 days

HDPE pre applied fully bonded PSA membrane

Dr. Fixit Prebond S is a preformed and pre applied HDPE fully bonded membrane that bonds to the wet concrete cast on the membrane. Reinforcement can be directly laid on top of the membrane and it does not require screed protection.

Typical Applications

- Basements raft & confined retaining walls
- Subway and UG metro Stations
- Cut and cover tunnels & Other underground civil structures

Packaging

Roll size of 20m length and 2.4 meters width at a composite thickness of 1.5 mm and 1.8mm

Features

- Superior bonding with the poured concrete.
- Available in larger roll widths to reduce the number of joints.
- High puncture and hydrostatic pressure resistance.
- Adaptable to varying surface profile.

1.4 Dr. Fixit Prebond E



Important Technical parameters

Tensile Strength	21 Mpa
Elongation	400%
Puncture Resistance	800 N
Resistance to Hydrostatic head	60 M

Pre-applied fully bonded HDPE PSA membrane

Dr. Fixit Prebond E is a preformed and pre-applied HDPE fully bonded membrane. It forms an integral seal which prevents lateral water migration & makes it unaffected by any substrate settlement.

Typical Applications

- Foundation design with isolated & combined footing
- Confined retaining walls
- Cut and cover tunnels
- Other underground civil structures

Packaging

Roll size of 24m length and available in 2.4-meter roll widths with a composite thickness of 1.2mm

Features

- Low flatness requirement to substrate.
- Reliable overlapping.
- Lesser joints and overlaps, due to larger roll widths.
- Fast and easy application.

1.5 Dr. Fixit Amphibia 3000 grip 1.3



Important Technical parameters

Tensile Strength	6 MPa
Elongation	700%
Joint strength with Bi Mastic	233 N
Puncture Resistance	800 N

Hydro reactive waterproofing membrane

Dr. Fixit Amphibia 3000 Grip 1.3 is a FPO + EPDM, pre-applied waterproof membrane, reactive upon contact with water, self-repairing, self-sealing and self-fastening to the concrete. It is composed of multiple layers with differentiated functions for total water tightness of UG structures.

Typical Applications

- Basements
- Subway and UG metro stations
- Residential & industrial buildings
- Other underground civil structures

Packaging

Roll size of 20m length and 1.8m width at a composite thickness of 1.3mm.

Features

- Self-Sealing and Self-Healing (In case of punctures during rebar work).
- Lighter & highly flexible membrane - Ease of handling.
- Robust joint (special bi-mastic sealant).
- Can be stapled/nailed on the surface.

1.6 Dr. Fixit Samshield XL 1500/2100



Important Technical parameters

Tensile Strength	3.5 MPa
Elongation	180%
Puncture Resistance	200 N
Crack Bridging ability	Min. 1.5mm (10 cycles pass)

Cross laminated SBS self adhesive waterproofing membrane

Dr. Fixit Samshield XL 1500/2100 membrane is a SBS modified self-adhesive cold applied waterproofing membrane based on a tropical grade of polymer modified bitumen. The bitumen compound is laminated onto an impervious, non-perforated, cross laminated HDPE film.

Typical Applications

- Used for horizontal and vertical application and as a damp proofing course for tanking below ground structures, subways, retaining walls etc

Packaging

Available in roll size of 10m length and 1 m width at 1.6mm and 2.1mm thickness.

Features

- Specially formulated for tropical climate grade.
- Ease of application - Self-adhesive and lightweight.
- Superior adhesion to vertical and horizontal surfaces.
- Good tear and puncture resistance.

1.7 Dr. Fixit Samshield P 1500



Important Technical parameters

Tensile Strength	150 N/5cm
Elongation	300%
Puncture Resistance	150 N
Peel Strength	1N/mm

SBS modified self adhesive waterproofing membrane

Dr. Fixit Samshield P 1500 is a SBS modified self-adhesive waterproofing membrane consisting of a self-adhesive polymer modified bitumen layer coated on to a tough high density polyethylene film and protected on other side by a silicone release film. It is generally used a damp proofing membrane.

Typical Applications

- Used for horizontal and vertical application and as a damp proofing course for tanking below ground structures, subways, retaining walls etc

Packaging

Available in roll size of 10m length and 1 m width

Features

- Cold applied self-adhesive membrane -Easy to apply.
- Good adhesion to substrate.
- Superior vapour resistance.
- Good tear and puncture resistance.

1.8 Dr. Fixit Samshield PS 2100/3500



Important Technical parameters

Tensile Strength	>400 N/5cm
Resistance to hydrostatic pressure	>50m
Puncture Resistance	>500 N
Tear Resistance	>300 N

Geotextile surfaced SBS self adhesive waterproofing & protection membrane

Dr. Fixit Samshield PS is a SBS modified bituminous, self-adhesive sheet membrane laminated onto a tough polyester fleece to provide a highly superior waterproofing and protection membrane for underground concrete structures. The self-adhesive side protected with a silicone release film.

Typical Applications

- Used for waterproofing and protection of concrete foundations and any below ground structures

Packaging

Available in roll size of 10m length and 1 m width at a thickness of 2.1mm and 3.5mm

Features

- High puncture and tear resistance.
- Good chemical resistance.
- Cold applied - Easy to apply.
- Completely non-biodegradable.

1.9
Dr. Fixit
Polyplus CP



Important Technical parameters

Particle size	40-150 microns
Seals shrinkage cracks up to	0.4mm width
Penetration rate	5mm/week
Resistance to hydrostatic pressure	Upto 50m

Crystalline waterproofing slurry coating

Dr. Fixit Polyplus CP is composed of high-quality cement, properly selected & graded inert aggregates, proprietary waterproofing active chemicals & additives. When applied as brush coat on concrete, it penetrates deeply into the capillaries of the concrete & protects it against the permeability of water.

Typical Applications

- Foundation & Basements
- Inspection pits & lifts shafts
- Retaining walls & sea defence walls
- Water retaining structures like water tanks & reservoirs etc

Packaging

Available in 25 Kg Pail

Features

- Forms monolithic layer with the concrete & becomes integral part of concrete.
- Protects concrete against contaminated water & corrosion.
- Does not require protective plaster, applicable over SSD & wet surface.
- Easy in application, only to be mixed with water at site.

1.11
Dr. Fixit
Flexi PU 270 (I)



Important Technical parameters

Tensile Strength	≥2 N/mm ²
Elongation at break	400%
Low temperature Crack bridging	3.2mm
Adhesion to concrete	≥1.5 N/mm ²

Liquid applied single component polyurethane waterproofing membrane

Dr. Fixit Flexi PU 270 (i) is a single component, liquid applied, highly permeant elastic, moisture cure polyurethane membrane for long lasting waterproofing performance. It is based on pure elastomeric, hydrophobic polyurethane resins which cures to form seamless and durable waterproofing coating.

Typical Applications

- Roof terraces and podium slab
- Car parking deck
- Waterproofing of Wet areas like Bathrooms, Kitchens, Balconies
- Auxiliary Rooms
- Application over PUF Insulation

Packaging

Available in 25 Kg Pails in red or brick red colour. Other colours maybe supplied on demand

Features

- User friendly – Easy to apply by brush, roller, and spray.
- Seamless coating – No laps & joints
- Excellent adhesion with Concrete, Metal & Plastic – Fully bonded coating.
- Root resistance – Durable for landscape area.

1.10
Dr. Fixit
Polyplus CP Admix



Important Technical parameters

Reduction in coefficient of water permeability	More than 90%
Reduction in chloride diffusion coefficient	More than 45%
Reduction in shrinkage and cracks	More than 20%
Food grade certification	CFTRI as per USFDA- 175.300

New generation integral crystalline waterproofing and durability enhancer

Dr. Fixit Polyplus CP Admix is the new generation integral crystalline waterproofing and durability enhancing admixture which produces waterproof and durable concrete by improving corrosion resistance, reduction in cracks and drastically reducing water permeability under hydrostatic pressure.

Typical Applications

- Concrete Slabs on grade & below grade
- Protect concrete for durability
- Basements & pits
- Foundations & civil substructures

Packaging

Available in Pack size of 20 Kg Bag.

Features

- Resists up to 16 Bar hydrostatic pressure.
- Can self-heal crack up to 0.5 mm.
- Significantly reduces chloride penetration and carbonation resistance.
- CE Approval as per EN 934-2.

1.12
Dr. Fixit
Superseal 4500



Important Technical parameters

Tensile Strength	15N/mm ²
Elongation at break	450%
Low temperature Crack bridging	3.2 mm
Puncture resistance	1000 N

Two component spray applied elastomeric hybrid polyurea polyurethane waterproofing membrane

Dr. Fixit Superseal 4500 PUH is a 100% solids (VOC free), instant setting hybrid polyurea polyurethane based waterproofing membrane suitable for waterproofing and protection to structural concrete. It is to be applied using specific spray equipment, to form an aromatic, seamless high performance waterproofing membrane for long lasting performance.

Typical Applications

- Podium & Roofs - Terraces, Balcony - Decks & parking slabs
- Unconfined Retaining walls
- Cut and cover Tunnels
- Sloping roofs & Green roofs
- Over Polyurethane Foams
- Waterbodies and Swimming Pools

Packaging

420 Kg Metal Drum Set (Part A : 220 Kg, Part B :200 Kg)

Features

- Fast setting – Quick turnaround time.
- Good elongation and recovery with high tensile strength.
- High impact & puncture resistance.
- Superior bonding to substrate.

1.13
Dr. Fixit
Superseal 500



Important Technical parameters

Tensile Strength	≥6 N/mm ²
Elongation at break	≥600%
Crack Bridging Displacement	>3.2 mm
Bond strength to concrete	>1.5 N/mm ²

Two component high build liquid applied polyurethane waterproofing membrane

Dr. Fixit Superseal 500 is a premium, high solid, high build, liquid, cold applied elastomeric two component polyurethane membrane used for long-lasting waterproofing solution. It meets the requirements of ASTM C836.

Typical Applications

- Podium
- Balconies
- Roofs - Terraces
- Railway and bridge decks
- Car Park Decks
- Application over PUF Insulation

Packaging

30 kg set (Part A: 10 Kg, Part B: 20 Kg)
Dr. Fixit Superseal 500 is supplied in Rusty Red colour.

Features

- Superior mechanical properties - unchanged even at elevated temperatures.
- Seamless coating – No laps & joints.
- Single coat application to achieve 1.5 mm DFT.
- Simple application by Notched trowel, steel trowel or squeeze.

1.14
Dr. Fixit
Superseal 900



Important Technical parameters

Tensile Strength	>15 N/mm ²
Elongation at break	>600%
Crack bridging displacement	>2 mm
Puncture resistance	>1000 N

Two component hand applied elastomeric hybrid polyurea polyurethane waterproofing

Dr. Fixit Superseal 900 is a premium, liquid-applied, highly elastomeric, two components, Polyurea polyurethane hybrid membrane, applied by brush, roller or spray and specifically used for long-lasting waterproofing protection. It is based on pure elastomeric PU-Polyurea hybrid resins, which result in excellent mechanical, chemical & physical properties.

Typical Applications

- Podium, Roofs - Terraces
- Balcony - Decks and Parking slabs (covered with suitable screed/finishes)
- Retaining walls, Foundations, UG Structure, Cut and cover Tunnels UG Metro stations
- STP, ETP & Marine structures

Packaging

16 kg Combo Pack (Part A-10 kg & Part B- 6 kg)

Features

- Good elongation and recovery with high tensile strength.
- Easily repairable locally, without worrying about over coating period.
- Resistant to detergents, oils, seawater, and domestic chemicals.
- Simple application by Brush, Roller, Airless Spray.

1.15
Dr. Fixit
Superseal TC 1000 Ultra



Important Technical parameters

Tensile Strength	14 N/mm ²
Elongation at break	250%
Tear strength	55 N/mm
Adhesion bond strength	>2 N/mm ²

Ultra high performance polyaspartic protective coating for exposed roof areas

Dr. Fixit Superseal TC 1000 Ultra is a pigmented, two component, UV and weather resistant, high abrasion resistant protective coating for exposed roof applications. It is liquid applied as a seamless coating & forms a very tough yet flexible film with superior UV and weather resistance properties.

Typical Applications

- As a top coat for Dr. Fixit range of Polyurea and Polyurethane coating
- As a standalone protective coating for concrete surfaces
- As a topcoat over Car Park deck system

Packaging

5 kg Combo Pack (Part A-2.5 kg & Part B- 2.5 kg).
Shades Available : White, Grey, Terracotta, Green, Light Blue.

Features

- Superior mechanical & physical properties – excellent abrasion resistance.
- Excellent UV and weather resistance.
- Extremely tough yet very flexible coating – Long lasting service life.
- Available in selected RAL colors.

1.16
Dr. Fixit
Pidifin 2K



Important Technical parameters

Elongation	>50%
Food grade	CFTRI Certification
Crack Bridging	1 mm
Adhesion strength	1N/mm ²

Acrylic cementitious two component waterproof coating

Dr. Fixit Pidifin 2K is an acrylic cementitious, polymer modified flexible, waterproofing & protective coating composed of best quality Portland cement, properly selected & graded aggregates, additives & acrylic emulsion polymer as a binder. It is applied to waterproof and protect concrete and masonry substrates.

Typical Applications

- Bathrooms, kitchen sinks, balconies, etc.
- Internal sides of domestic water tanks.
- Can be applied over internal damp walls and concrete surfaces due to its excellent bonding.

Packaging

3 kg, 9 kg, 15 kg, 30 kg & 90 kg.

Features

- Flexible coating which can be used for both positive and negative side waterproofing due to its excellent bonding.
- Excellent adhesion to concrete and masonry surfaces.
- Excellent resistance to ingress of water.
- Confirms to portable water contact parameters & Non-toxic with low VOC.

1.17

Dr. Fixit
Fastflex



Important Technical parameters

Tensile Strength	1N/mm ²
Elongation at break	120%
Crack bridging	Upto 2mm
Food grade	CFTRI Certification

High performance polymer modified cementitious coating

Dr. Fixit Fastflex is a two-component cementitious coating system for waterproofing of wet areas and any water retaining structures such as swimming pools and water features. It provides strong bonding and excellent resistant to hydrostatic water pressure by forming highly elastic seamless coating over the applied concrete.

Typical Applications

- Bathrooms, toilets, balconies
- Swimming pools, water features and water tanks
- Any concrete, cement or masonry surface that are subject to moisture ingress

Packaging

12 kg and 48 kg

Features

- Elastomeric, seamless & impervious membrane.
- High film build-up with excellent adhesion to concrete & masonry substrates.
- Easily applied by brush, roller, or trowel.
- Can be applied on damp surfaces.

1.18

Dr. Fixit
Fastflex Ultra



Important Technical parameters

Tensile Strength	>1 MPa
Elongation at break	200%
Crack bridging	Upto 2mm
Food grade	CFTRI Certification

Two component highly flexible cementitious coating

Dr. Fixit Fastflex Ultra is a two-component acrylic polymer modified cementitious product, consisting of Part A (Liquid) and Part B (Powder) which yields a flexible waterproofing coating with excellent water resistance and crack bridging capability.

Typical Applications

- Bathrooms, toilets, balconies
- Terraces, Flat & pitched roofs
- Swimming pools, water features and water tanks
- Any concrete, cement or masonry surface that are subject to moisture ingress

Packaging

12 kg and 48 kg

Features

- Elastomeric, seamless & impervious membrane.
- High film build-up with excellent adhesion to concrete & masonry substrates.
- Easily applied by brush, roller, or trowel.
- Can be applied on damp surfaces.

1.19

Dr. Fixit
Bathseal Select



Important Technical parameters

Tensile Strength	≥1.5 N/mm ²
Elongation	>250%
Crack Bridging ability	3mm
Shore A Hardness	≥55

High solid single component waterborne waterproofing membrane

Dr. Fixit Bathseal Select is a ready-to-use; liquid-applied elastomeric water based waterproof coating which cures to form a monolithic membrane designed for wet areas under tiled finish application. Being a 1K liquid applied coating, it reduces mixing errors and saves time due to excellent flow properties and thereby easy application with roller or brush.

Typical Applications

- Waterproof coating for internal wet areas as under tiled finishes
- Concrete, Prefabricated bathrooms, toilets and drywall partitions, kitchens, laundry area

Packaging

4, 10 & 20 litres

Features

- High bond strength to a variety of substrates and building materials.
- Compatible with polymer modified cement-based tiles adhesives, screeds, and renders.
- Bonds to clean metal drains, PVC, and ABS drain assemblies.
- Liquid applied membrane, can be applied with roller, brush.

1.20

Dr. Fixit
Tankpro W



Important Technical parameters

Tensile Strength	12 MPa
Elongation at break	100%
Resistance to Hydrostatic pressure	5 Bar
Adhesion to concrete	2 MPa

Polyurethane coating for waterproofing and protection of water tanks

Dr. Fixit TankPro W is a two-component, solvent-free, thixotropic coating, based on high quality elastomeric polyurethane resins. After polymerization, it produces a strong, elastic, hydrophobic membrane suitable for waterproofing and protection of water tanks. surfaces. It can be easily applied by using a brush or a roller.

Typical Applications

- Waterproofing and protection of Water tanks made of reinforced cement concrete (RCC)
- Prefabricated concrete tanks

Packaging

9 Kg (comp A: 7.5 Kg, comp B: 1.5 Kg)

Features

- Single coating for Waterproofing and Protection for water tanks giving faster turnaround time.
- Being solvent-less, it can easily be applied in closed spaces.
- Certified for potable water tanks, in accordance with the US FDA 175.300 requirements.

1.21
Dr. Fixit
Tankpro E



Important Technical parameters

Elongation	> 100%
Tensile strength	9 MPa
Crack Bridging	Upto 3.2mm
Abrasive resistance	32 mg

Chemical Resistant Coating for Waterproofing & Protection of Concrete Structure

Dr. Fixit TankPro E is a two component, solvent free, advanced polymer coating. It produces a strong membrane of sufficient elasticity with outstanding adhesion to various substrates which is designed to provide excellent abrasion resistance and the protect the concrete against aggressive chemicals.

Typical Applications

- Waterproofing and protection of
- Sewerage tanks, aeration tanks, sedimentation tanks
 - Waste water treatment plants

Packaging

13 Kg (Comp A – 3 Kg, Comp B – 10 Kg)

Features

- Replaces Coal Tar Epoxy: This system replaces the current Coal Tar Epoxy, ensuring better working conditions and increased labor productivity.
- Time, Manpower, and Cost Savings: Upgrading to this system results in significant savings of time, manpower, and money.
- Easy to apply – Can be applied using roller and brush.
- Excellent adhesion to variety of substrates and building materials.
- Solvent less – Easy to apply in confined spaces.
- High chemical and abrasion resistance as per ASTM D543 & ASTM D4060.

1.23
Dr. Fixit
Coal Tar Epoxy



Important Technical parameters

Bonding/adhesion	1.2 – 1.4 N/mm ²
Resistance to micro-organisms	No growth observed
Chemical resistance	Passes
Salt spray resistance	Passes

Two component coal tar epoxy coating for concrete and steel surfaces

Dr. Fixit Coal Tar Epoxy is composed of best quality dehydrated coal tar, liquid epoxy resins and curing agent, properly selected & graded inert fillers, additives and solvent. It is used as an anticorrosive & protective coating for concrete as well as steel structure because it has excellent chemical resistance properties in atmosphere or in contact with various chemical solutions.

Typical Applications

- Sewage & Effluent treatment plants
- Thermal Power plants & industries
- Cooling towers
- Foundation protection from contaminated soil, backfill and water

Packaging

5 kg [Part-A Base 1.25 kg and Part B Hardener 3.75 kg]

Features

- Excellent adhesion to concrete, asbestos & metallic surfaces.
- Gives long lasting corrosion protection.
- Resistance to abrasion makes it suitable for application over floors of tanks & concrete rafts.
- Resistant to wide range of acids, alkali & salt solutions, effluents & sewage.

1.22
Dr. Fixit
Dampguard Classic



Important Technical parameters

Surface drying time	1-5 hours
Adhesion strength	> 2.5 N/mm ²
Water absorption	Nil
Food grade	CFTRI certification

Damp-proof microbial resistant coating for internal walls and RCC water tanks

Dr. Fixit Dampguard Classic is a two-component coating composed of epoxy resin, curing agent, inert pigments & properly selected fine fillers, additives in water as a medium (direct application over cementitious surfaces). It is used as an internal coating for the damp proofing treatments of water tanks with anti-microbial anti-fungal properties.

Typical Applications

- Damp proofing treatment for RCC water tanks
- Internal damp wall treatment
- As putty with OPC- White cement to fill the fine cracks of internal walls
- In sterile areas of pharma, food industries & hatcheries etc

Packaging

500 gm, 1 kg & 200 kg

Features

- Can be applied over damp concrete and plaster surfaces.
- Anti-fungal properties, Resistant to micro-organisms
- Excellent adhesion to all cementitious substrates.
- Excellent resistance to water, salt water, mild acids, alkalis, and soap water.

1.24
Dr. Fixit
Flexshield TPO



Important Technical parameters

Breaking strength	1 kN (45 mil), 1.1 kN (60 mil)
Elongation at break of reinforcement	Minimum 15%
Tearing strength	Min 245 N (45 Mil)
Puncture resistance	1.1 kN (45 mil), 1.3 kN (60 mil)

High performance TPO membrane

Dr. Fixit Flexshield TPO membranes are manufactured using a hot-melt extrusion process for complete scrim encapsulation. It is reinforced with a strong, polyester reinforced fabric center (scrim) and a tough thermoplastic polyolefin compounded top ply at the bottom, creating a very tough, durable and versatile sheet that is ideal for re-roofing and new construction.

Typical Applications

- Large commercial roofs

Packaging

Without fleece back – 2m x 20m & with fleece back- 3.66m x 30m
(Available thicknesses are 45 mil & 60 mil)

Features

- Outstanding puncture resistance, high breaking and tearing strength.
- Very high peel strength of seam joints and heat welds.
- Chlorine free, plasticizer free, phthalate free. Environmentally friendly and safe for humans.
- Exceptional resistance to heat, UV, Ozone, bacteria, chemical, acid corrosion.

1.25 Dr. Fixit Fibertite



Important Technical parameters

Breaking strength	1499 N
Tear strength	445 N
Factory seam strength	1955 N
Puncture resistance	350 lbs

High performance roof waterproofing membrane based on KEE technology

Dr. Fixit FiberTite is a 36 mil (0.9 mm) thick 4-layer technology with densely knitted fibre mesh and a unique adhesive coat that saturates the fibre and then forms a bond with the back and face coats based on the KEE formula. KEE (Ketone Ethylene Ester) is a solid, flexible, high-molecular ingredient ideal for thermoplastic processing.

Typical Applications

Metal and concrete roofs in

- Processing plants
- F&B, Dairy industries
- Electronics & Automobiles
- Tire manufacturing units
- Data centres & Airports
- Roof renovation works

Packaging

2.5 Mtr x 30 Mtr @ 0.9 mm composite thickness

Features

- Superior mechanical and chemical resistance, Oil & grease resistance.
- Fabric base layer ensures superior puncture and tear resistance.
- Resistance to hail, wind, and environmental factors.
- UL approved for fire resistance & compatible with insulation materials.

1.26 Dr. Fixit Roofseal Select



Important Technical parameters

Tensile Strength	1.2 N/mm ²
Elongation at break	100%
Adhesion strength	1 N/mm ²
Crack bridging	2 mm

High performance waterproofing Coating for Roof

Dr. Fixit Roofseal Select is a heavy-duty terrace waterproof coating system, composed of specially developed highly elastic & resilient acrylic polymers, properly selected & graded fillers, lightfast & weather durable pigments, micro-fibres, additives & best quality fungicidal in water medium. It is used as a liquid applied waterproofing membrane for all types of building terraces.

Typical Applications

Over existing building Flat / Slope roof surface likes

- Brick-Bat Coba finish, PCC, cement mortar / screed
- Broken China mosaic tiles roof

Packaging

4 & 20 litres.

Features

- Higher tensile strength, tear resistance & bond strength with cementitious substrates.
- Abrasion resistant – No additional protective coating is required for roof subjected to foot traffic.
- Ease of application – Can be applied by brush & roller easily.

1.27 Dr. Fixit Roofseal Classic



Important Technical parameters

Tensile Strength	2.1 N/mm ²
Elongation at break	300%
Tear strength	24 N/mm ²
Crack bridging	2 mm

Acrylate PU hybrid waterproofing coating for Roof

Dr. Fixit Roofseal Classic is single component, insulating elastomeric waterproof coating for roofs that offers a seal against water and heat. Dr. Fixit Roofseal Classic is based on Acrylate PU hybrid emulsion technology reinforced with nano fibres. It combines the benefits of waterproofing as well as heat reduction in a single product.

Typical Applications

Over existing building Flat / Slope roof surface like

- Brick-Bat Coba finish surface
- Cement mortar screed
- China mosaic tile roofs

Packaging

1, 4, 10, 16, 20 litre.

Features

- Outstanding flexibility with crack bridging up to 2mm.
- Single component, Ready to use easy to apply.
- Non - toxic and VOC compliant water-based coating.
- Tough coating – Suitable for light foot traffic.

1.28 Dr. Fixit Roofseal Ultra



Important Technical parameters

Tensile Strength with 45 GSM mesh	4 N/mm ²
Elongation at break	300%
Shore A Hardness	72
Crack bridging ability	3 mm

Polyurethane dispersed acrylate waterproofing coating with flutyne technology for Roof

Dr. Fixit Roofseal Ultra is polyurethane hybrid next generation liquid applied roof top coat waterproof coating with flutyne protection technology. Designed to resist water intrusion and heat. It cures into a monolithic high elastic waterproofing membrane resistant to ponding water and with improve UV, dirt resistant, with solar reflectance index of 106.

Typical Applications

Ideal as top coat for waterproofing of terraces, flat and slope, curved roofs etc

- Brick-Bat Coba finish
- Cement mortar screed
- China mosaic tile roofs
- Complex detailing, up-stands, penetrations and terminations

Packaging

4 & 20 litres (Colour-White)

Features

- Excellent weathering resistance (up to 12 years) when reinforced with glass fiber mesh.
- Outstanding flexibility with crack bridging up to 3mm.
- Reduces surface temperature up to 10°C** in the peak summer.
- Single component, Ready to use easy to apply.

1.29
Dr. Fixit
Cool roof Coating



Important Technical parameters

Tensile Strength	1.5 N/mm ²
Elongation at break	190%
SRI Index	108
Crack bridging	1.5 mm

Heat reflective waterproof coating for metal roofs & terraces

Dr. Fixit Cool Roof Coating is heat reflective environmentally friendly APEO free elastomeric waterproof coating engineered with UV cross-linkable polymer technology. Once completely cured, it exhibits excellent resistance to dirt pick-up and UV; an essential and critical need to retain whiteness thereby heat reflective properties of installed coating with ageing.

Typical Applications

Heat Reflective & Waterproof Coating for galvanized sheets & Metal roofing panel sheets over the following surfaces.

- Factories
- Warehouse
- Shopping malls
- Clubs

Packaging

20 Litres (White colour).

Features

- UV Cross linkable, 100% pure acrylic.
- Elastic and Tough; withstand pedestrian traffic.
- Excellent resistance to dirt pick-up & Resist growth of Algae, Fungi.
- Eco friendly; free from hazardous chemicals.

1.30
Dr. Fixit
Torchshield P 3160/P 4160



Important Technical parameters

Elongation at break (L&T) %	60±20
Tensile strength (N/5cm)	L – 700 ± 10% T – 450 ± 10%
Tear strength (%)	L – 350 ± 10% T – 300 ± 10%
LAP Joint Strength (N/5CM)	L – 700 ± 10% T – 450 ± 10%

APP modified bitumen based membranes for waterproofing

Dr. Fixit Torchshield P range of polymer modified membranes are modified bitumen waterproofing membranes manufactured by saturating and coating a polyester carrier with a waterproofing compound made of a special grade of modified bitumen with APP polymers. The upper and lower surfaces are laminated with polyethylene film.

Typical Applications

Waterproofing and damp-proof membranes for

- Concrete roof (Sloped/Flat roofs)
- Basements and swimming pools (Externally).
- Car park, irrigation canals lining, Concrete retaining structures

Packaging

Dr. Fixit Torchshield P Membranes are available in Roll sizes of 1 m X 10 m. Available in 3mm & 4mm thickness.

Features

- High strength reinforcement gives excellent resistance to puncture and stress.
- It is easily torch on applied and adheres well to the substrate.
- The modified bitumen membranes coating adheres well to contours.
- It is dimensionally stable to normal structural movements in the building.



BUILDING
ENVELOPE
INSULATION
SYSTEMS



Sr. No.	Product Name	EXTERNAL COATINGS AND INSULATION SYSTEMS		
		EXTERNAL WALL INSULATION & FINISHING SYSTEMS	ROOF INSULATION SYSTEMS	
			Residential	Commercial
Insulation Systems				
1	WalAce System (EIFS)	■		
2	Dr. Fixit Foamshield			■
3	Dr. Fixit Blueseal		■	

2.1

WalAce EIFS



Important Technical parameters

Impact Resistance	10 Joules
Water absorption	<0.5 Kg/m ²
Fire classification	B-s3, d0 or greater
Certification	ETAG, GRIHA

External wall insulation and finishing system

WalAce® is an external insulated façade system that combines superior functional performance with aesthetics. It is a multi-layer system on exterior walls that comprises of i) an insulation panel fixed with adhesive ii) base coat with reinforcing mesh and iii) a layer of finish acrylic render available in a range of colours. WalAce® is a proven system for building highly durable facades that deliver high performance against ingress of heat & water.

Typical Applications

- External walls

Packaging

WalAce Adhesive/ Mortar – 25 Kg Bags
WalAce Mesh – 1m x50m rolls
UnoFin Acrylic Texture – 20 Kg bucket

Features

- Superior wall assembly that replaces conventional plaster + putty + primer + paint build up.
- Insulated wall system – High energy efficiency & reduction in air conditioning loads, savings in electricity costs.
- Offers high degree of resistance to cracking, protection against mold, mildew & weathering, thereby ensuring an aesthetically pleasing and long-lasting façade that improves energy efficiency of the building.
- Vibrant finish with high quality acrylic texture which has excellent resistance to mold, mildew, and aging.

2.3

Dr. Fixit Blueseal



Important Technical parameters

Density	>55 Kg/m ³
Compressive strength	>500 kPa
Tensile strength	>500 kPa
Closed cell content	>95%

Spray applied polyurethane foam system

Dr. Fixit Blueseal is a two component CFC & HCFC Free, polymeric MDI based system for producing rigid polyurethane foam by spray application. It complies to IS 12432 – Part 3 for Application.

Typical Applications

- Roof Insulation

Packaging

Drums: Activator : 250 kg,
Base : 210 kg

Features

- CFC & HCFC free, Green Compliance.
- Jointless Insulation, no thermal bridging.
- Low thermal conductivity, High thermal resistance.
- Easy to apply.

2.2

Dr. Fixit Foamshield



Important Technical parameters

Density	45 – 50 Kg/m ³
Compressive strength	> 300 kPa
Tensile strength	> 400 kPa
Thermal conductivity	0.023 W/mK

Spray applied polyurethane foam system

Dr. Fixit Foamshield is a two component CFC & HCFC Free, polymeric MDI based system for producing rigid polyurethane foam by spray application for Thermal Insulation. It complies to IS 12432 – Part 3 for Application.

Typical Applications


- Roof
- Cold storages
- Tank Insulations

Packaging

Drums: Activator : 250 kg.
Base : 210 kg.

Features

- CFC & HCFC free, Green Compliance.
- Light weight with high compressive strength.
- Seamless insulation with no thermal bridging.
- Low thermal conductivity, high reduction in heat ingress through roofs.

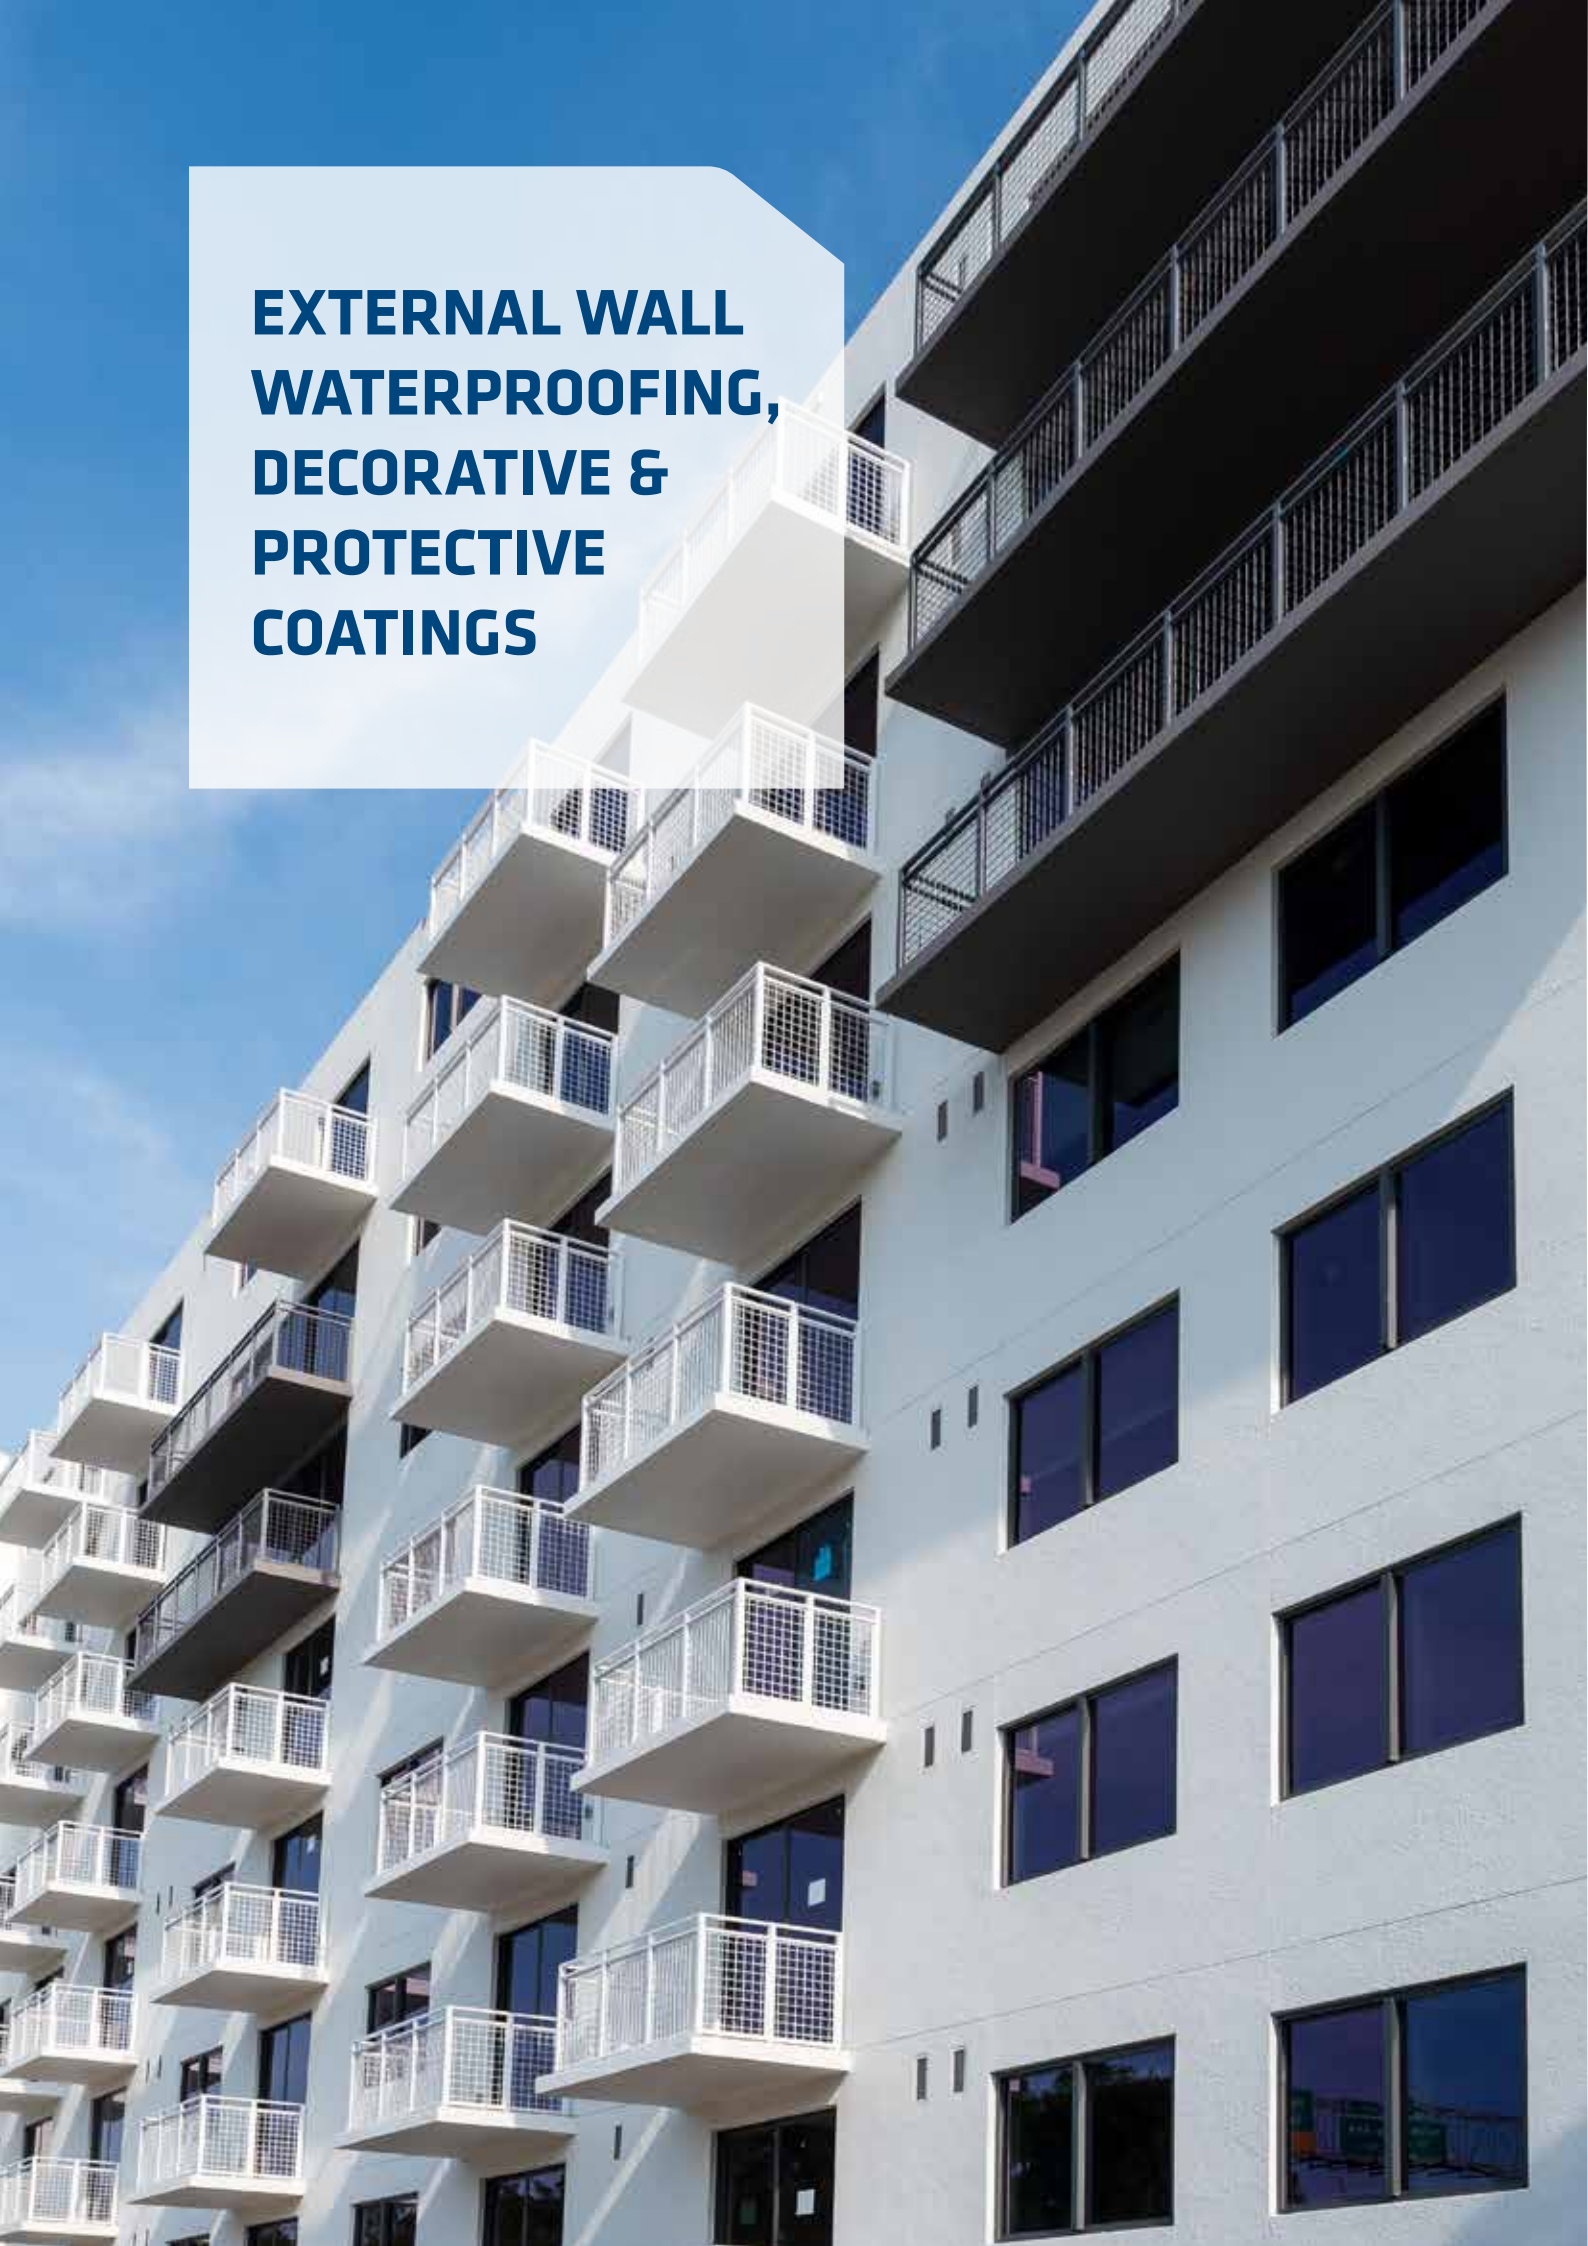

EXTERNAL WALL
WATERPROOFING,
DECORATIVE &
PROTECTIVE
COATINGS

Sr. No.	Product Name	EXTERNAL WALL WATERPROOFING, DECORATIVE & PROTECTIVE COATINGS	
		Building External Walls	Protective Coatings for Concrete
Coatings			
1	Dr. Fixit Raincoat Series	■	
2	Dr. Fixit Concrete Guard WB		■
3	Durathane 100 EA		■
4	Dr. Fixit Raincoat Waterproofing Coating	■	
5	Dr. Fixit Raincoat Star	■	

3.1

Dr. Fixit Raincoat



Important Technical parameters

Tensile Strength	1.5N/mm ²
Elongation	Min 100%
Adhesion strength	1N/mm ²
Crack bridging ability	1mm

Acrylic elastomeric exterior waterproof coating

Dr. Fixit Raincoat is composed of high-quality acrylic emulsion polymer, UV resistant & weather durable pigments, properly selected & graded fine fillers, additives & biocides. It is used as a waterproofing & protective coating for exterior walls of the buildings.

Typical Applications

- All types of exterior masonry surfaces, concrete, cement sand renderings, etc
- Applicable on asbestos sheets

Packaging

White Base - 1, 4 & 20 litre.
Mid Tone and Dark Base - 900 ml, 3.8 & 19 litre.

Features

- Flexibility - Flexible and covers hairline cracks effectively.
- Excellent resistance to carbonation - Superior structural protection.
- Resistance to fungus and algae - Maintains the aesthetic value.
- Very low dirt pick up & can be cleaned easily.

3.2

Dr. Fixit Raincoat Waterproofing Coating



Important Technical parameters

Elongation	Min 100%
Tensile Strength	2 N/mm ²
Adhesion strength	1 N/mm ²
Solid content	60-65%

Universal elastomeric exterior waterproof coating

Dr. Fixit Raincoat Waterproof Coating is composed of high-quality emulsion polymer, weather durable pigments, properly selected & graded fine fillers, additives & biocides. It is used as a waterproofing & protective coating for exterior walls of the buildings.

Typical Applications

- All types of exterior masonry surfaces, concrete, cement sand renderings, etc.
- Applicable on cement sheets

Packaging

1, 4, 10 & 20 litre

Features

- Flexible covers hairline cracks (up to 0.5 mm) effectively, thus prevents ingress of water.
- Toughness - Tough film withstands wind driven rain.
- Ready to use - No dilution is required.
- Ease of application - User friendly, easily applicable by brush, roller or spray.

3.3

Dr. Fixit Raincoat Star



Important Technical parameters

Elongation	≥ 100 %
Tensile Strength	≥ 3.5 N/mm ²
Crack bridging	1mm
Adhesion strength	≥ 2N/mm ²

Hydrophobic acrylate exterior wall coating

Dr. Fixit Raincoat Star is an exterior wall coating based on Acrylate technology with hydrophobic properties. This innovative product offers unique waterproofing and water-resistant capabilities, effectively guarding against dampness caused by heavy rain. It is specifically designed to provide a luxurious finish while preserving the vibrant colour for an extended period.

Typical Applications

- All types of exterior masonry surfaces, concrete, cement sand renderings, existing coating etc
- Applicable on exterior wall fibre cement board sheets

Packaging

4, 10 & 20 litres

Features

- Waterproofing: The high-build finish provides excellent water resistance.
- UV protection: Prevent fading and discoloration from the sun's UV radiation.
- Anti-algal: Enhanced resistance to dirt and algae.
- Crack bridging: elastic film covers hairline cracks.

3.4

Dr. Fixit Raincoat Neo



Important Technical parameters

Tensile Strength	≥1.5 MPa
Elongation	≥125%
Pull-off adhesion strength	≥1.5 MPa
Coating thickness	100-110 microns

Primerless high build waterproof acrylate coating for exterior surfaces

Dr. Fixit Raincoat Neo is acrylate copolymers based elastomeric exterior wall waterproof coating designed with weather resistant acrylate polymers. It is UV resistant and offers good hiding and spreading & develops a strong inter-coat adhesion with the substrate therefore no separate primer is required.

Typical Applications

- Plastered vertical wall surface
- Already painted wall

Packaging

White Base 1, 4 & 20 litre
Mid Tone 950 ml, 3.8 & 19 litre
Dark Base 950 ml, 3.8 & 19 litre

Features

- Waterproofing - More durability & thicker coat than ordinary exterior paint.
- UV protection - Provides complete weather protection from heat and rain.
- Crack bridging - Elastic film covers hair line cracks.
- Colour Variants - Tintable; available in wide range of colour variants.

3.5

Dr. Fixit Raincoat Classic



Important Technical parameters

Tensile Strength	2.5 N/mm ²
Elongation	Min 100%
Positive hydrostatic pressure	7 Bar
Crack bridging ability	Class A4

Reactive acrylate copolymers

Dr. Fixit Raincoat Classic is composed of reactive acrylate copolymers, water-based elastomer for waterproofing exterior masonry wall substrate and designed to beautify and protect structures from damage due to weathering and moisture intrusion. It can be tinted to any colour, retaining the colour long-term.

Typical Applications

- All types of exterior masonry surfaces, concrete, cement sand renderings, existing coating etc
- Applicable on exterior wall fibre cement board sheets

Packaging

1, 4 ,10 & 20 litres

Features

- Excellent resistance to carbonation -Superior structural protection.
- Flexibility - Flexible and covers hairline cracks effectively.
- High elasticity -Withstands stress due to thermal expansions & contractions.
- Very low dirt pick up & can be cleaned easily.

3.6

Dr. Fixit Raincoat Select Topcoat



Important Technical parameters

Tensile Strength	2.5 MPa
Elongation	100%
Crack bridging ability	Class A4
Accelerated QUV @ 3000 hours	Passes

High sheen elastomeric waterproof coating for external walls

Dr. Fixit Raincoat Select Top Coat is waterproof external wall coating based on Acrylate with Flutylene technology. It is specially formulated for superior performance on exterior walls with unique water-resistant properties against fungi, algae and dampness caused by lashing rain.

Typical Applications

- All types of exterior masonry surfaces, concrete, cement sand renderings, existing coating etc
- Applicable on cement sheets

Packaging

1, 4 ,10 & 20 litres

Features

- Provides excellent colour retention for a long-lasting attractive finish.
- Excellent resistance to carbonation -Superior structural protection.
- Very low dirt pick up & can be cleaned easily hence maintains the aesthetics.
- User friendly, easily applicable by brush, roller or spray.

3.7

Dr. Fixit Concrete Guard WB



Important Technical parameters

Adhesion Strength	≥2N/mm ²
Tensile Strength	≥2N/mm ²
Elongation	≥200%
Crack bridging ability	2mm

Water based acrylic anti-carbonation coating

Dr. Fixit Concrete Guard WB is specially formulated to protect reinforced concrete and other masonry cementitious substrate that is directly exposed to atmospheric conditions like UV radiation, high humidity, heavy rain, industrial pollution, & carbonation.

Typical Applications

- Bridges, flyovers, subways, under pass, stadiums, exterior surface of RCC water tanks etc
- Concrete structures that are exposed to atmospheric conditions

Packaging


20 litre

Features

- Anti-Carbonation – Excellent barrier to penetration & attack of carbon dioxide, water, sulphates and chloride ions.
- Protects the structures from adverse marine and coastal environments.
- Micro-organism resistance – Excellent algae / fungal resistance.
- Durability – tough, flexible & durable coating.

3.8

Durathane 100 EA

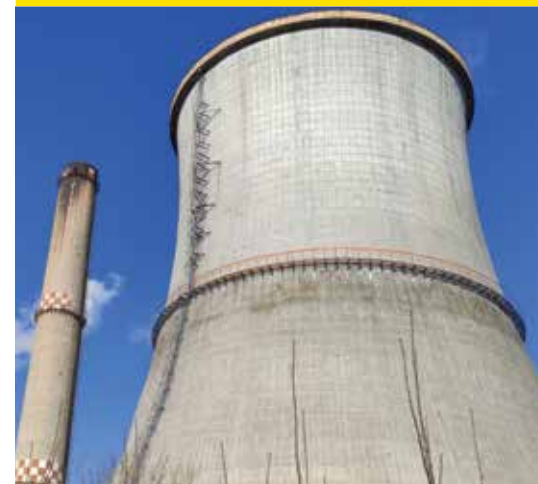

Important Technical parameters

Adhesion pull off strength	≥2 MPa(Concrete), ≥10 MPa (Steel)
Tensile Strength	≥10 MPa
Recoverable Elongation	≥30 %
Shore D Hardness	≥55

Solventless spray-applied elastomeric pu lining

Durathane 100 EA is a solventless spray-applied elastomeric polyurethane fast curing coating recommended as a protective coating and lining for concrete and steel structures. It is exceptionally resistant to most chemicals and is resilient to withstand accelerated weathering conditions.

Typical Applications

- It is extensively used for internal and external linings for pipelines, concrete tunnels, thermal power cooling towers (NDCT), Storage tanks, mounded bullets, reservoirs, overhead tanks, marine and off shore structures

Packaging

200 Litre MS drum

Features

- The coating has excellent film build capabilities and can achieve 500 microns to 3000 microns DFT in single application with multiple passes
- Protects against microbiologically induced corrosion (MIC), making it ideal for waste water applications.
- Resistance to sea water with excellent corrosion and erosion resistance.



**PRIMERS FOR
WATERPROOFING,
DECORATIVE &
PROTECTIVE
COATINGS**



4.1 Dr. Fixit Cipoxy 16 D



Important Technical parameters

Solid content by weight	≥98%
Pull off adhesion on concrete	>2 MPa
Pot Life @27°C	≥60 minutes
Tack Free dry time @30°C	<8 hours

Solvent free epoxy primer

Dr. Fixit Cipoxy 16D is a solventless, medium viscous, epoxy primer.

Typical Applications

- Cipoxy 16D is used as primer / sealer in conjunction with epoxy, PU and polyurea coating system and bonding primer for corrugated metalroof

Packaging

40 litre Pack

Features

- Penetration: Low viscosity penetrates into concrete surfaces.
- Excellent Bonding: Bonds strongly to damp concrete surfaces moisture content up to 7%.
- User friendly: Does not blister on curing.
- Multipurpose : The most suitable epoxy primer for PU, polyurea and top coats.

4.2 Dr. Fixit Torchshield Primer



Important Technical parameters

Solid content by weight	53-59% ± 2%
Water content	Max 0.5%
Tack Free time @30°C	Max 4 hours
Drying time @30°C	24 hours

Solvent based bitumen primer

Dr. Fixit Torchshield Primer is a solvent-based bitumen modified primer conforming to ASTM D/41, to be used to seal and prepare the substrate prior to the installation of the Dr. Fixit Torchshield torch-on and Dr. Fixit Samshield self-adhesive membranes.

Typical Applications

- Ensure that the surface to be primed is dry and free from dust, oil, paint, curing compounds and any other contaminating materials

Packaging

20 litres

Features

- Excellent adhesion.
- Non-blushing in humid environments.
- It acts as a binder for the dust particles which gets accumulated on the concrete surface even after cleaning.

4.3 Dr. Fixit Primeseal Primer



Important Technical parameters

Solid content	Min 48%
Bonding strength	Excellent to porous substrates
Tensile strength	>2N/mm²
Weathering resistance	Excellent

Efflorescence resistant penetrating primer

Dr. Fixit Primeseal is water-based primer composed of acrylic emulsion polymer, properly selected fine fillers, white pigments & additives in water as a medium. It is used as primer over exterior & interior building walls before application of water-based paints.

Typical Applications

- Priming of plastered walls, asbestos, concrete surface, etc

Packaging

1, 4, 10, 20 litres

Features

- Efflorescence - Provides excellent efflorescence resistance due to its chemical inertness.
- Bonding - Good binding of chalky or porous substrates and over coating.
- Suitability - Used as a primer on internal and external surfaces.
- Provides deep penetration thus imparts excellent substrate adhesion.

4.4 Dr. Fixit Primer AC



Important Technical parameters

Solid content	Min 52%
Adhesion(MS,G-Steel& Aluminum)	Excellent
Water resistance	Excellent
Continuous Salt spray fog test	100 hrs. passes

Water based anti-corrosive primer

Dr. Fixit Primer AC is a single component waterborne Anti-Corrosive Primer for metal and concrete substrates providing excellent adhesion and corrosion protection. It is a fast-drying primer with excellent adhesion over a wide range of metal substrates.

Typical Applications

- Applications over structural steel, mild steel, cold rolled steel, galvanized steel, aluminium & other metal substrates/concrete. Also suitable for medium to heavy duty iron & steel corrosion protection

Packaging

4 & 20 litres

Features

- Excellent corrosion resistance.
- Excellent resistance to water, mild acids, alkali and soluble metal salts.
- Fast drying, high scratch resistant dry film & excellent bonding for topcoat.
- Provides excellent surface bonding to various metal substrates.

4.5

Dr. Fixit

Primeseal Plus



Important Technical parameters

Weight solids	56.0 ± 1.5 %
Adhesion bond strength	Excellent (5A)
Thermal shock resistance	Excellent (5A)
Water resistance (By immersion)	Excellent

Single component speacility waterborne primer for smooth and hard surfaces

Dr. Fixit Primeseal Plus is a single component high-performance primer specifically developed for providing adhesion over non porous substrates such as existing ceramic tiles, vitrified tiles or clay roof tile. It provides outstanding adhesion properties to the topcoat, when subsequently applied.

Typical Applications

- Priming smooth and non-porous surfaces to coat over, such as Ceramic tiles, Mosaic Tiles, Marble stone, Clay tiles, Cement Screed, etc

Packaging

5 & 20 litres

Features

- Strong Adhesion Strength on Hard & Smooth Surfaces.
- Non-Flammable & Non-Toxic.
- Fast Drying & Early Water Resistance.
- Excellent Resistance to Water Ponding.

4.7

Dr. Fixit

Primo White



Important Technical parameters

Tensile strength	> 2.5 N/mm ²
Adhesion strength	Excellent
Time for surface drying	30 mins
Alkali resistance	Good

Alkali resistant acrylic external wall primer

Dr. Fixit Primo White is a single component water-based Alkali Resistant primer for interior and exterior walls before applying water base waterproofing coatings. It is intended to be used on fresh plaster and porous concrete wall surface. The product features excellent adhesion and superior brightness and covering capacity is compatible with all exterior paint and topcoats.

Typical Applications

- Priming for Plastered wall surface
- Concrete surface
- Asbestos

Packaging

White Base 1, 4, 10 & 20 litre.

Features

- Superior opacity and whiteness over other exterior primers.
- Excellent to bonding to porous substrate.
- Seals chalky surface and enhance life of topcoat.
- Low VOC, Free from mercury and lead.

4.6

Dr. Fixit

Superseal P 200 WB



Important Technical parameters

Specific Gravity of mix @25°C	1.0
Pot life @25°C	60 mins
Re-coat time	6-24 hours
Adhesion to concrete	2 MPa

Two component low-viscous water-based epoxy primer

Dr. Fixit Superseal P 200 WB is a two-component water-based epoxy coating mixed in the ratio of 1:1 by volume. This primer is suitable for application over concrete surfaces and recommended for both old and new concrete substrates.

Typical Applications

- Primer for Dr. Fixit® range of polyurethane range of products
- Primer when humidity barrier properties are required
- Sealing coat for concrete

Packaging

8 litre (comp. A: 4 litre & comp. B: 4 litre)

Features

- Ease of application: 1:1 by volume application ratio by brush/roller.
- Good Penetration: Low viscosity penetrates concrete surfaces.
- Bonding: Strong adhesion even on damp or green concrete.
- Safe to apply: Low-odour, safe and non-flammable (zero VOC).

4.8

Dr. Fixit

Primo Putty



Important Technical parameters

Total solids % (w/w)	48-54
Specific Gravity	0.95 – 1.05
Topcoat application interval	4 Hours
Surface drying time	30 mins

Acrylic exterior wall putty primer

Dr. Fixit Primo Putty is a unique aqueous co-polymer-based bonding primer designed for application on external and internal white cement putty surfaces for adhesion between the putty wall and topcoat material. It has excellent adhesion and enhances durability of topcoat coating.

Typical Applications

- Bonding primer for white cement based putty surface for both interior and exterior walls

Packaging

4, 10 & 20 Ltr

Features

- Improves adhesion of topcoat.
- Fast drying
- Simple and quick application.
- Eco-Friendly & Very low VOC.



Sr. No.	Product Name	GROUTS		
		Baseplate foundation of Heavy machinery	Equipment foundations/ Anchor Pocket	Equipment foundations (If Chemical Spillages is expected)

Coatings				
1	Pagel V1/50	▪	▪	
2	Dr. Fixit Pidigrout 10M		▪	
3	Cipogrout 1000	▪	▪	▪

5.1
Pagel V1/50



Important Technical parameters

Density of freshly mixed mortar	2300 Kg/m³
E Module (Cylinder) at 90 days	39.3 N/mm²
Bending strength at 28 days	10 N/mm²
Compressive strength at 28 days	80-85 N/mm²

High strength non-shrink cementitious grout

Pagel V1/50 is a cement-based, chloride-free, and non-shrink precision grout for critical applications of any kind having high workability. Universal grout for precision machines of any kind. Grouting height from 20 – 120 mm.

Typical Applications

- Precision machines of any kind, Turbines, Generators, compressors, Diesel engines, anchor screws, levelling units, sole plates, bridge bearings, steel and concrete columns etc

Packaging

30 Kg

Features

- High flowability, even after 60 minutes.
- Resistant to freeze/thaw cycles, waterproof, resistant to oil and petrol.
- Resistance to cracks even when having a low W/C value (0.35).
- Meets requirements of CRD-C- 621-83, ASTM-C-1107 grade C, ASTM-C-827 and ASTM-C-1090, IS-4031-1988.

5.3
Cipogrout 1000



Important Technical parameters

Density of mix	2.05 gm/cc
Flexural strength	25-27 MPa
Tensile strength	12-14 MPa
Compressive strength at 7 days	≥ 100 MPa

Epoxy based three component grout

Cipogrout 1000 is a three-component, pourable, high strength grout based on a specially developed epoxy polymer. Designed to withstand high static and dynamic loads, it provides high compressive strength of over 100 MPa coupled with excellent flexural strength and chemical resistance.

Typical Applications

- Base-plate grouting, crane & transporter rails, Industrial equipment subjected to dynamic loads, Equipment bases where chemical spillages occur, Grouting pre-cast concrete panels, Floor repairs

Packaging

28 Kg Kit

Features

- Excellent chemical resistance against oil, grease, etc.
- Excellent adhesion to steel and concrete.
- Predictable and reproducible performance.
- Higher compressive strength than any contemporary grouts.

5.2
Dr. Fixit
Pidigrout 10M



Important Technical parameters

Fresh wet density	2250-2400 Kg/m³
Tensile strength at 28 days	5N/mm²
Flexural strength at 28 days	10N/mm²
Compressive strength at 28 days	66N/mm²

Dual shrinkage cementitious flowable grout for repair rcc structures

Dr. Fixit Pidigrout 10M is a ready to use, non-shrink, free-flowing and high strength cementitious grout. It is engineered designed suitable for precision grouting where it is essential to withstand static and dynamic loads.

Typical Applications

- Baseplate foundation of Heavy machinery and equipment foundations like boiler foundation and turbine generator bearing. Bridge bearing pads, Cavities, gaps, recesses and anchorage etc

Packaging

25 Kg and 50 Kg

Features

- Provides excellent durability and strong structural repair.
- Dual expansion system with long-term drying shrinkage, hence reducing cracking tendency.
- High built technology : Can be applied up to 60mm thickness in single layer.
- Self-compacting grout to ensure high level load bearing areas.



SEALANTS

Sr. No.	Product Name	GENERAL INDUSTRY										
		EXPANSION JOINTS	HORIZONTAL CONCRETE PAVEMENT	WINDOW & DOOR PERIMETERS	STATIC CRACKS IN RCC	TRAFFICKED JOINTS	FLOOR JOINTS	BRICK & CONCRETE WALL JOINTS	EXTERNAL CLADDING	CRC PANELS, PARTITION WALLS, EIFS	FIXING GLASS INTO ALUMINIUM FRAMES	INTERIOR AC DUCT SEALING
		Horizontal	Vertical									

1	Dr. Fixit Pidiseal PS 41 G		■										
2	Dr. Fixit Pidiseal PS 42 P	■											
3	Dr. Fixit Pidiseal PS43	■		■		■	■						
4	Feviseal HY 200				■			■	■				
5	Feviseal HY 300			■		■	■			■			
6	Feviseal HY 100	■	■		■			■					
7	Feviseal Weatherproof PRO										■		
8	Feviseal Neutral Pro											■	
9	Dr. Fixit Silicone Sealant				■								

6.1
Dr. Fixit
Pidiseal PS 41G



Important Technical parameters

Setting time @30°C	24 Hours
Tensile Strength	3-5 Kg/cm²
Elongation	500-600%
Adhesion/Bond strength	3-4 Kg/2.5 cm

Two components polysulphide sealants (gun grade)

Dr. Fixit Pidiseal PS 41 G is a two-part elastomeric sealant based on a liquid polysulphide polymer, which when mixed with accelerator cures by chemical reaction to form a tough, flexible rubber seal. It is used for sealing of construction, expansion & contraction joint application to seal the joint hermetically.

Typical Applications

- Sealing of moving and construction joints, joints between different construction materials, structural expansion & contraction joints, Vehicular and pedestrian traffic pavement joints

Packaging

6.5 kg (approx. 3850 ml)
32.0 kg (approx. 18850 ml)

Features

- Thixotropic material- It does not sag.
- High elasticity - Benefits movements accommodations in joints with MAF of 25% for lap joints and 50% for butt joints.
- It is Non-toxic - Suitable in water tank & reservoir application.
- Resistant to sunlight (UV rays) and ozone.

6.2
Dr. Fixit
Pidiseal PS 42P



Important Technical parameters

Setting time @30°C	24 Hours
Tensile Strength	3-5 Kg/cm²
Elongation	500-600%
Adhesion/Bond strength	3-4 Kg/2.5 cm

Two component polysulphide sealant (pouring grade)

It is a two-part elastomeric sealant based on a liquid polysulphide polymer, which when mixed with accelerator cures by chemical reaction to form a tough, flexible rubber seal. It is used for sealing of construction, expansion & contraction joint application to seal the joint hermetically.

Typical Applications

- Sealing of moving and construction joints, joints between different construction materials, structural expansion & contraction joints, Vehicular and pedestrian traffic pavement joints


Packaging

6.5 kg. (approx. 4100 ml)

Features

- Self-levelling Material in horizontal surfaces.
- High Elasticity benefits movements accommodations in joints.
- Accommodates continuous & pronounced cyclic movements with MAF of 25% for lap joints and 50% for butt joints.
- Good resistance to bio-degradation benefits water retaining structure application.

6.3
Dr. Fixit
Pidiseal PS 43

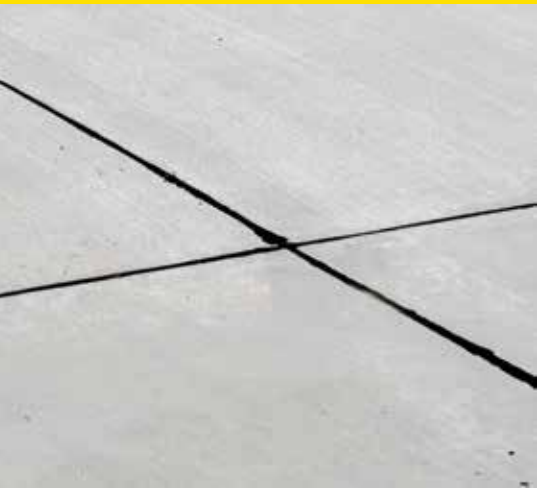

Important Technical parameters

Service temperature range	-15°C to 80°C
Adhesion & Cohesion	No failure
Flame Resistance	Pass
Hardness (Shore A)	10-15

Fuel resistant, two-part polysulphide sealant

Dr. Fixit Pidiseal PS 43 is a two-part elastomeric sealant based on a liquid polysulphide polymer & has excellent fuel resistance, adhesion to different substrates like masonry, concrete with excellent movement accommodation. It is far more superior to conventional joint sealant materials.

Typical Applications

- Parking, cargo areas, Garages & subways
- Moving and construction joints in bridges & concrete highways.
- Airport runways, Aircraft fuelling & parking areas.

Packaging

6.5 kg. (approx. 3850 ml)
32.0 kg. (approx. 18850 ml).

Features

- Cold applied, No pre- heating.
- Easily pourable from the container & it is self-levelling.
- Recovers its original size and shape after expansion & contraction movements.
- Resistant to aircraft fuels, sunlight (UV rays) and ozone.

6.4
Feviseal HY 200



Important Technical parameters

Movement Capability	±25%
Peel strength to concrete	> 30N
Tensile strength	> 0.8 MPa
Elongation at break	> 200%

Advanced one component polyurethane sealant

Feviseal HY 200 is one component moisture curing, low modulus hybrid polyurethane sealant. It is a new generation isocyanate-solvent free sealant that brings together all the mechanical properties of polyurethane and silicone sealant. It complies to ASTM C920 Type S, Grade NS, Class 25 NT.

Typical Applications

- Control Joints.
- Repairing of non-moving concrete cracks.
- Sealing Joints in between tiles, bricks, and marble etc.
- Window & door frames, Skirting, Parapets & Balcony, Curtain wall.
- For termination in waterproofing work.

Packaging

Available in 600 ml Sausage

Features

- Ready to use single component product.
- Forms a permanent, tough, elastic rubber seal.
- Excellent adhesion with low dirt pickup
- No bubble formation

6.5

Feviseal HY 300



Important Technical parameters

Service temperature range	-40°C to 100°C
Elongation at break	Minimum 400%
Tensile Strength	1.8 Mpa
Movement Accommodation Factor	±25%

High modulus hybrid sealant & adhesive

Feviseal HY 300-gun grade is is a one-part moisture curing high modulus hybrid sealant. It has excellent adhesion over a wide variety of substrates & is Paint-able with most common industrial paints.This sealant has been specifically formulated as a non-staining sealant.

Typical Applications

As an elastic joint sealer for:

- Control joints, Air ducts and high vacuum systems, Gaskets in open ings in walls or floors for ducts, piling, Aluminium fabrication etc

Packaging

Available in 600 ml sausage

Features

- Abrasion resistant including foot traffic.
- Excellent adhesion to a wide variety of substrates.
- Permanently Flexible with low dirt pick-up
- Excellent low temperature gun ability.

6.7

Feviseal Weatherproof Pro



Important Technical parameters

Tensile Strength (White & Black)	1.5 N/mm²
Tear Strength (White & Black)	7 N/mm
Elongation (White & Black)	900 %
Shore A Hardness (White & Black)	30

Weatherproof silicone sealant

Feviseal weatherproof pro is a one-part premium neutral curing silicone sealant for use in new or remedial weatherproofing applications. In addition to the unique features of silicone rubber, Feviseal weatherproof Pro provides excellent adhesion to glass, metal and numerous construction materials.

Typical Applications

- Ideal for sealing glass, aluminium, non-oily wood, brick, concrete, steel, ceramic, selected plastics, etc, Sealing of aluminium/glass window frame joints, Expansion joints, metal curtain walls, General glazing etc

Packaging

280 ml plastic cartridge with separate nozzle. Available in White, Clear & Black

Features

- It is completely non-sagging in nature.
- Tough & flexible after curing -performs well during expansion & contraction.
- Good UV resistance & insulation properties.
- Primeless adhesion to most porous and non-porous building material.

6.6

Feviseal HY 100



Important Technical parameters

Service temperature range	-40°C to 100°C
Shore A Hardness	35±5
Tensile Strength	0.8 Mpa
Movement Accommodation Factor	±25%

Low modulus hybrid sealant

Feviseal HY 100 is one component moisture curing, low modulus silyl modified polymer sealant. It is a new generation isocyanate-solvent free sealant that brings together all the mechanical properties of polyurethane and silicone sealant.

Typical Applications

- Sealing of expansion andconstruction joints as well as joints between different construction materials in high - rise buildings, basements, floorings, between precast concrete panels etc

Packaging

Available in 600ml sausage

Features

- Good primer less adhesion on many common construction substrates.
- Damp surface tolerant and no bubble formation.
- Excellent adhesion to a wide variety of substrates.
- Environmentally friendly and resistant to chemicals.

6.8

Feviseal Neutral Pro



Important Technical parameters

Tensile strength (Black)	1.4 N/mm²
Elongation @ break (White & Black)	500%
Tear Strength (White & Black)	4 N/mm
Shore A Hardness (White & Black)	35

Neutral silicone sealant

Feviseal Neutral Pro one-part Neutral Cure Silicone Sealant is a non-slump, moisture-curing RTV (room temperature vulcanizing) that cures to form a tough, medium modulus rubber for long- term flexibility and durability.

Typical Applications

- Sealing for housing windows, metal cladding, ducting and interior sealing in building and housing and sealing glass, aluminium, non-oily wood, brick, concrete,steel, ceramic, selected plastics, etc

Packaging

280 ml plastic cartridge with separate nozzle. Available in White, Clear & Black

Features

- One component ready to use, Neutral Cure, Fast skinning and curing.
- Outstanding resistance to Ozone, UV, moisture & temperature extremes.
- Cured sealant remains stable and flexible from - 40°C to + 150°C.
- Primer-less adhesion to glass, aluminium and most building substrates.

6.9
Dr. Fixit
Silicone Sealant



Important Technical parameters

Shore A Hardness	10 -20
Adhesion/Bond strength	5 -6 Kg/2.5cm
Elongation at break	> 350 %
Movement Accommodation Factor	+/- 15

Acetic cure silicone sealant for windows

Dr. Fixit Silicone Sealant is an acetoxy cure, high modulus and single component silicone sealant. When properly cured, it becomes a permanently elastic compound. It has excellent adhesion to glass, ceramics and sanitary ware etc.

Typical Applications

- Ideal for sealing glass and aluminum & non-oily wood, sealing of aluminum/glass window frame joints, fixing glass into aluminum frames in lieu of rubber beading

Packaging

280 ml & 240 ml plastic cartridge with separate nozzle

Features

- No mixing is required, directly applicable through cartridge.
- Tough & flexible after curing-Performs well during expansion & contraction.
- Good UV resistance & insulation properties.
- Up to 95% recovery after plastic deformation.

6.10
Dr. Fixit
Pidiprime A



Important Technical parameters

Appearance	Very thin liquid like water
Specific gravity at 30°C	0.81 +/- 0.02 cps
Surface dry time	10-15 minutes
Sealant application time after	30 minutes

One Pack Primer For Polysulphide Sealants

Dr. Fixit Pidiprime A is a one pack ready to use solvent containing solution of polymer. It enhances the bonding of Polysulphide Sealants with metal, glass, wood & cementitious surfaces. It is not recommended for application in areas where sealant remains in completely immersed in water.

Typical Applications

For enhancing bonding of Polysulphide Sealants, PU Sealants & Silicone Sealants with Aluminium, brass, steel, etc metallic surfaces, Glass, Porous surfaces like concrete, plasters & wood


Packaging

500ml, Colour – Water white

Features

- Application advantage - Ready to use brushable material.
- Drying - Surface drying is faster - saves time.
- Bonding - Strong adhesion to almost all building materials except plastics.
- Durability - Withstands to weathering conditions without loss of adhesion.



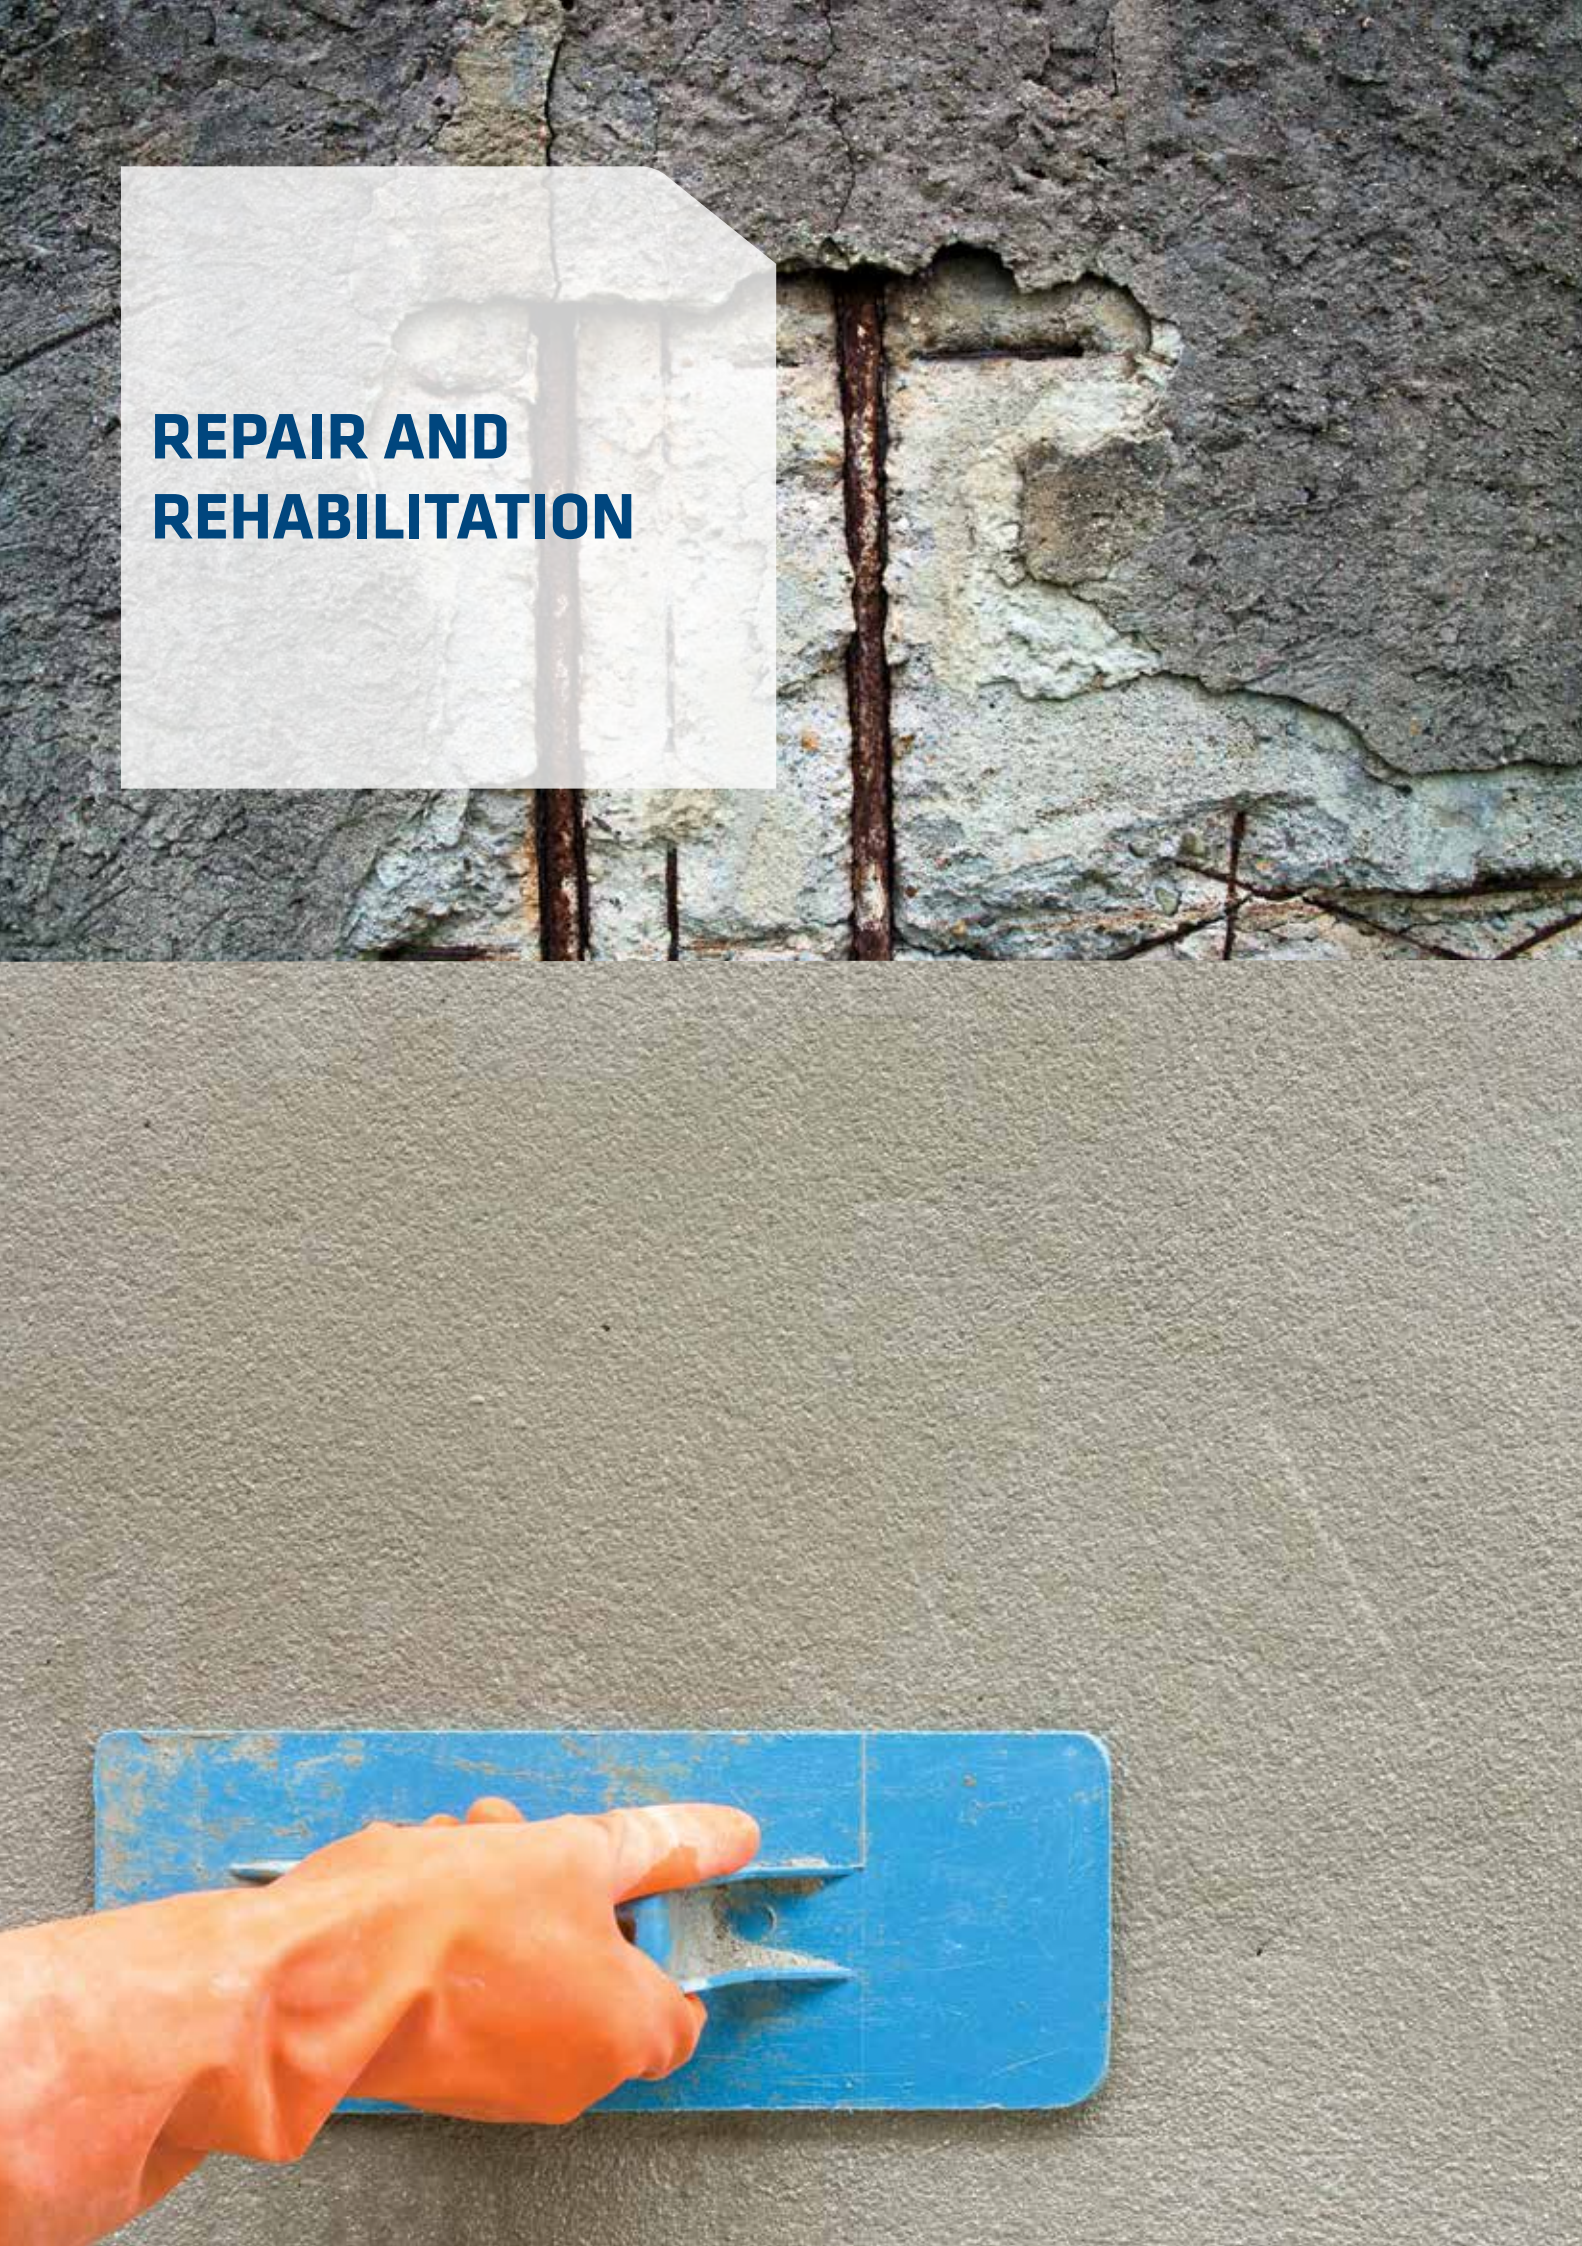

Sr. No.	Product Name	REPAIR AND REHABILITATION			
		STRUCTURAL	INJECTION GROUTS	BONDING AGENT	ANCILIARY PRODUCT
		Structural Repair	Non Structural Repair		

REPAIR PRODUCTS						
1	Dr. Fixit Triflex ProDetail					▪
2	Dr. Fixit Triflex Protect					▪
3	Dr. Fixit Triflex SmartTec					▪
4	Dr. Fixit Micro Concrete	▪				
5	Dr. Fixit Repair ProPolymer Mortar HB	▪				
6	Dr. Fixit Repair Polymer Mortar	▪				
7	Dr. Fixit PU Plain Injection			▪		
8	Dr. Fixit PU Foam Injection			▪		
9	Dr. Fixit Epoxy Injection Grout			▪		
10	Dr. Fixit Inject AC 300-HP			▪		
11	Dr. Fixit Pidicrete AM			▪		
12	Dr. Fixit Epoxy Bonding Agent				▪	
13	Dr. Fixit Crack-X-Shrinkfree		▪			
14	Dr. Fixit Crack-X-Paste		▪			
15	Dr. Fixit Crack-X-Powder		▪			
16	Dr. Fixit Pidicrete MPB				▪	
17	Dr. Fixit Zinc Rich Primer					▪
18	Dr. Fixit Rust Remover					▪
19	Dr. Fixit Instant Leak Plug					▪
20	Dr. Fixit Pidicrete URP				▪	▪

7.1
Dr. Fixit
Triflex Prodetail



Important Technical parameters

Drying time at 20°C	45 minutes
Elongation (with fleece)	≥40 %
Tensile strength (with fleece)	≥3 N/mm ²
Tear resistance (with fleece)	>20 N/mm

Pmma based liquid applied system for detailing and flashing

Dr. Fixit Triflex ProDetail is 2-component, pigmented waterproofing resin with a polymethyl methacrylate (PMMA) base for specialized detailing and flashing in new construction and repairs. It offers excellent adhesion to majority of building material substrates & waterproofing materials, fast curing & ease of application.

Typical Applications

- Metal roof joints & J-Bolt detailing
- Upstands detailing, Skylights Pipe penetrations, A/C ducts
- Industrial metal gutters
- Concrete, metal, PVC and glass junction treatment

Packaging

Dr. Fixit Triflex ProDetail - 15 Kg Metal Drum
Dr. Fixit Triflex Catalyst – 25 kg Pack.
Dr. Fixit Triflex Fleece – 1.0 Mtr x 50 Mtr

Features

- Excellent adhesion on critical substrates like PVC, metal, glass, RCC etc.
- Extremely weather-resistant (UV, IR) etc.
- Fast-curing (rain proof in 30 mins).
- European Technical Assessment according to ETAG 005 with CE mark.

7.3
Dr. Fixit
Triflex SmartTec



Important Technical parameters

Shore A Hardness	65
Tensile strength (with fleece)	4 MPa
Fully hardened @ 23°C	48 hours
Fire resistance	Pass

Single component solvent free waterproofing system for application on wet Cementitious surface

Dr. Fixit Triflex SmartTec is a solventfree polyurethane base single component liquid applied waterproofing system based on STPE (Silyl terminated polyether) technology. The single-component material adheres to concrete and other absorbent substrates without the need for a primer, thus saving time and effort.

Typical Applications

- Concrete and screed subjected to moisture and dampness.
- Foundation waterproofing
- Ponds & Fountains
- Pile caps.
- Complex detailing in foundations

Packaging

Dr. Fixit Triflex SmartTec - 14 Kg Metal Drum (Available in RAL 7030 Stone Grey colour)
Dr. Fixit Triflex Fleece – 0.52 Mtr x 50 Mtr

Features

- Single component, no mixing errors
- Can be applied over damp surfaces.
- Fast curing (rainproof in 60 mins)
- No primer required.

7.2
Dr. Fixit
Triflex Protect



Important Technical parameters

Elongation	> 100%
Tensile strength	> 3 N/mm ²
Drying time @ 20°C	45 mins
Tear resistance (with fleece)	≥ 150 N / 15 mm

Pmma based liquid applied system for flat & pitched roofs

Dr. Fixit Triflex ProTect is a 2- component, pigmented waterproofing resin with a polymethyl methacrylate (PMMA) base. It offers a combination of unique physical, mechanical and application properties like adhesion to majority of building material substrates & waterproofing materials, fast curing and ease of application.

Typical Applications

- Dr. Fixit Triflex ProTect is used as high quality and durable waterproofing product for flat and pitched roofs in new buildings and refurbishments

Packaging

Dr. Fixit Triflex ProTect - 20 Kg Metal Drum (Pebble Grey colour)
Dr. Fixit Triflex Catalyst – 0.5 kg Pack
Dr. Fixit Triflex Fleece – 0.52 Mtr x 50 Mtr roll.

Features

- Solvent free & fast curing.
- Excellent adhesion properties on a multitude of substrates.
- Elastic, crack bridging and flexible in low temperatures.
- Root-resistant according to FLL test methods.

7.4
Dr. Fixit
Micro Concrete



Important Technical parameters

Compressive Strength @ 30°C	55N/mm ² at 28 days
Flexural Strength @ 30°C	10.5N/mm ² at 28 days
Tensile Strength @ 30°C	6N/mm ² at 28 days
Bond shear strength	10N/mm ² at 14 days

Flowable mortar for repairs to damaged reinforced concrete structure

Dr. Fixit Micro Concrete is a ready to use dual shrinkage compensated dry powder, requiring only the addition of clean water to produce a free flowing dimensionally stable micro concrete. It conforms to the requirements of EN 1504-3 class R4.

Typical Applications

- Repair of damaged/spalled concrete structures such as column beams, floors, for jacketing of RCC columns, slabs / beams to increase load-bearing capacity, Pile head repairs etc

Packaging

25 Kg Unit

Features

- Repair of damaged / spalled concrete structures such as columns, beams, floors and where access is restricted.
- Excellent bond to concrete substrates without independent primer.
- Can be applied 100 mm thickness in a single layer.
- Exceptional flow allows pumping or pouring into restricted locations.

7.5

Dr. Fixit Repair Pro Polymer Mortar HB



Important Technical parameters

Compressive Strength @ 30°C	55 N/mm ² at 28 days
Flexural Strength	10.5 N/mm ² at 28 days
Tensile Strength	6 N/mm ² at 28 days
Bond shear strength	10 N/mm ² at 14 days

High strength, high build, dual shrinkage compensated repair mortar

Dr. Fixit Polymer Mortar HB is a ready-to-use dimensionally stable cementitious fibre reinforced structural grade repair mortar. It produces a dense, high strength repair mortar, with excellent bond characteristics to steel and concrete. It conforms to the requirements of EN 1504-3 class R4.

Typical Applications

- Repairs to reinforced or pre stressed slabs, beams or columns, Repair of structural members subjected to repetitive loading, Overhead and vertical applications to restore concrete cover etc

Packaging

25 Kg Unit

Features

- Dual Shrinkage compensated - Reduces cracking tendencies.
- Fast and easy placing - reduced time for repairs.
- Excellent adhesion to both old concrete (≥ 2 MPa).
- specifically developed to provide an easy to-apply product.

7.6

Dr. Fixit Repair Polymer Mortar



Important Technical parameters

Pot life	60 mins
Compressive strength at 28 days	38 MPa
Tensile Strength	> 1.5 MPa
Bond shear strength	Yes

Fiber reinforced high strength dual shrinkage compensated trowable polymer repair mortar

Dr. Fixit Repair Polymer Mortar is a ready to use dimensionally stable fibrous reinforced cementitious structural grade Polymer Repair Mortar. It produces a dense, high strength Polymer Repair Mortar, with excellent bond characteristics to steel and concrete. Dr. Fixit Repair Polymer Mortar is suitable for 5mm to 25mm thickness.

Typical Applications

- Repairs to reinforced or prestressed slabs, beams, retaining wall or columns.
- Overhead and vertical applications to restore concrete cover.
- For renovating and resurfacing concrete structures such as beams columns, building facades and more

Packaging

25 Kg Bag

Features

- Easy to use: Ready to use and reduce time for repair.
- Long term durable: Provides excellent durability and strong structural repair.
- Polymer Repair Mortar: Able to repair structural strengthening of concrete.
- Dual shrinkage compensated: Dual expansion system with long-term drying shrinkage, hence reducing cracking tendency

7.7

Dr. Fixit PU Plain Injection



Important Technical parameters

Tensile strength	>1 MPa
Bond strength	> 2.5 N/mm ²
Elongation at break	> 80%
Shore A Hardness	> 50

Two component polyurethane resin for crack sealing and grouting

Dr. Fixit PU Plain Injection is highly reactive two-component polyurethane for cracks in concrete or masonry & serves as horizontal water stop against capillary rising moisture in brickwork, stonework, etc. It has high penetration, quick setting, and forms tough and flexible polyurethane.

Typical Applications

- Permanent stopping of high-volume water ingress in underground structures, water leakage in dams and hydel power, water channels, sewers, manholes and utility boxes etc

Packaging

5 Kg

Features

- Very low viscosity and highly penetration in fine cracks and cavities.
- Durability – Provides structural strength and rigidity.
- Bonding – Bonds strongly to brick, stone & cementitious substrate in air & to wet surfaces.
- Non-toxic – It is approved by CFTRI for drinking water contact.

7.8

Dr. Fixit PU Foam Injection



Important Technical parameters

Expansion rate	> 30 times
Pot life (without mixing water)	Max 30 mins
Set time	< 5 Mins
Bond strength	0.43 N/mm ²

Single component polyurethane foam injection grout

Dr. Fixit PU Foam Injection is based on hydrophobic polyurethane pre- polymer & accelerator composition. It only reacts when it comes in contact with water, producing a relatively stiff/inert polyurethane foam. It is a quick & temporary expanding grout for sealing of cracks leaks even under high hydrostatic pressure.

Typical Applications

- For defective concrete like cracks for water tank, wastewater effluent tank, and tunnels
- Also, for instant stopping of water ingress in underground structures


Packaging

5.5 Kg and 22 Kg

Features

- Lower mixed viscosity less than 350 cP - Penetrates macro & micro cracks.
- Durability-It provides structural strengthening by sealings cracks and cavities.
- Bonds strongly to dry & wet concrete, bricks & stones.
- Lower viscosity helps to penetrate macro as well as micro cracks.

7.9
Dr. Fixit
Epoxy Injection Grout

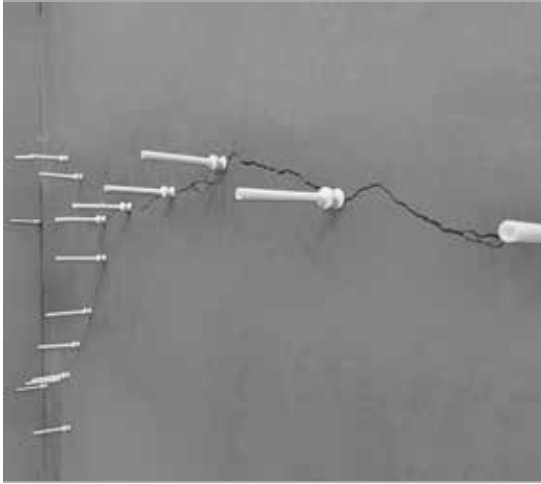

Important Technical parameters

Compressive strength at 7 days	>70N/mm ²
Flexural strength at 7 days	>30N/mm ²
Tensile strength at 7 days	>15N/mm ²
Bond strength	Concrete Failure

Two component low viscous epoxy based moisture insensitive injection grout

Dr. Fixit Epoxy Injection Grout is two component, low viscus and solvent free suitable for grouting application as well as to seal structural cracks in concrete. It provides deep penetration, shrink free solid mass, strong bonding inside the cracks and excellent resistance to honey combing & chemicals.

Typical Applications

- Permanent bonding solution for concrete cracks,Repair of crack concrete areas in floors, walls, tanks & sea walls, Injection in to cracks & honey combing in concrete & masonry

Packaging

1 Kg and 3 Kg

Features

- Seals & bonds strongly with cracks of concrete, floors & walls.
- Low viscosity helps in deep penetration into the cracks. Thus seals the cracks permanently.
- Suitable for repairs of heavy concrete structures like bridges, dams, buildings.
- High mechanical strength to ensure long working life.

7.11
Dr. Fixit
Pidicrete AM



Important Technical parameters

Color	Brownish grey powder
Bulk density	0.92 - 1.06 gm/cc
Shrinkage	Nil
Setting time	30 - 600 mins

Expansive plasticising admixture & grouting aid for cementitious grouts

Dr. Fixit Pidicrete AM is composed of plasticizers, expansion additives, polymers & defoamer. It is used for producing cementitious injection grouts for pressure / gravity injection into concrete structures. It meets the requirement of ASTM C 109: 99, ASTM C 307, BS 1881 Part 207.

Typical Applications

- For Injection Grouting in RCC slabs, Sunken slabs, RCC walls of water tanks, swimming pools, Basements for waterproofing purpose, Duct grouting, Rock and soil anchoring, Crack filling in structural cracks etc

Packaging

225 grams

Features

- Produce shrinkage compensating cement slurry.
- The mix (with cementitious grouts) has reduced permeability to water.
- Chloride and iron free, hence no chance of corrosion.
- Does not affect the setting time and strength of cement.

7.10
Dr. Fixit
Inject AC 300-HP



Important Technical parameters

pH	7 to 9
Adjustable gel time	1 to 12 Minutes
Viscosity by Brookfield, cP	< 5
Shore 00	> 50

Polyacrylate based hydrophilic polymeric gel

Dr. Fixit Inject AC 300-HP is a nonhazardous, Hydrophilic acry ate-based gel which is 4 component system to be injected with 2 components injection equipment. It is based on ultra-low viscosity hence most suitable for sealing micro cracks, dampness and reinjectable hose and packers.

Typical Applications

- Concrete structures.
- Diaphragm walls.
- Precast sections.
- Subway stations.
- Dampness / seepage waters.

Packaging

Part A1- Acrylic emulsion :20 Kg
Part A2- Accelerator :300gm
Part B1- Catalyst :350gm

Features

- User friendly - Nonhazardous and easy to inject.
- Ultra low viscosity - Highly penetrative in micro pores, cracks and through reinjectable hose system
- Quick reaction- Faster gelling and ideal to seal the water seepages.
- Reversible reaction- Reactive and reversible swelling action which prevent water seepages by hydrophilic characteristic and volume expansion

7.12
Dr. Fixit
Epoxy Bonding Agent



Important Technical parameters

Compressive strength at 7 days	>60 N/mm ²
Flexural strength	>25 N/mm ²
Tensile strength at 7 days	>10 N/mm ²
Shear bond strength	Concrete Failure

Two part solvent free epoxy resin based bonding agent

Dr. Fixit Epoxy Bonding Agent is composed of liquid epoxy resin and hardener. It is used for bonding of structural concrete new to old concrete and bonding agent for bricks and steel components because it gives excellent bonding properties to freshly mixed concrete/ mortars, glazed bricks, tiles, etc.

Typical Applications

- Bonding agent for bonding of old to new concrete / mortar, to extend or repair structural concrete, Bonding agent for glazed brick, tiles, steel & structural members

Packaging

1 Kg

Features

- Easily applicable by brush as a bonding agent for old to new concrete / mortar.
- Excellent adhesion to almost all building materials.
- Bond strength exceeds the tensile strength of concrete.
- Moisture tolerant - Provides strong bond between old and fresh concrete.

7.13 Dr. Fixit Crack-X-Shrinkfree



Important Technical parameters

Appearance	White paste
Base	Acrylic with specially added filler
Full curing time@ 30°C, days	7
Specific gravity	0.26 +/-0.02

One time shrink free filler for plaster cracks

Dr. Fixit Crack-X Shrinkfree is composed of best quality polymer, properly selected fillers & additives. It is fast drying, flexible, very light weight, soft putty like material used for filling cracks in plastered surfaces because it is 100% shrink free.

Typical Applications

- Internal & external surface cracks on plaster up to 10 mm width

Packaging

350 ml and 750 ml

Features

- Shrinkage – Non-shrink even after curing.
- User friendly – One pack, very soft paste, easily applicable by fingers or putty knife.
- Paintability – Easily paintable after one day of application.
- Non-toxic – It is non-toxic hence user friendly.

7.14 Dr. Fixit Crack-X-Paste



Important Technical parameters

Elongation	60-110%
Tensile strength	Minimum 1.1 MPa
Shore A (3 days)	Minimum 35
Shrinkage %	18-22

Fibre reinforced polymer modified paste for internal and external crack repair

Dr. Fixit Crack-X Paste is ready to use with highly composed acrylic emulsion polymer to achieve highly elastic paste for internal and external crack repair. It is a single pack, ready to use flexible putty for filling the cracks in plastered surfaces it has excellent bonding, ease of application, water resistance, aesthetic & durability.

Typical Applications

- Internal & external Plastered brick masonry wall cracks of up to 5 mm width.

Packaging

300 gm, 500 gm, 1 Kg & 5 kg

Features

- Elastic polymers and micro fibres give long lasting permanent crack sealing.
- Flexible, therefore does not crack & accommodates minor movements in cracks.
- Paintability – Easily paintable after one day of application.
- Excellent adhesion with cementitious surface.

7.15 Dr. Fixit Crack-X-Powder



Important Technical parameters

Colour	White
Application Life @25°C	>20 minutes
Setting time@25°C, hours	3 hours
Paintability	Paintable

Powder crack filler for surface cracks in internal and external surfaces

Dr. Fixit Crack-X Powder is a high strength, cement-based polymer modified powder material for filling cracks in plastered surface. It is composed of cement, properly selected aggregates, polymer & additives which requires on site addition of water only. It is ideal to fill 3 to 5 mm wider static cracks.

Typical Applications

- To fill the static cracks of 3 to 5 mm sizes in horizontal or vertical areas of buildings & structures
- Level the undulation of the un-plastered/plastered walls and ceilings before painting

Packaging

500 g, 1 Kg and 25 Kg

Features

- Polymer modified properties it gives long lasting permanent crack sealing.
- Eco- friendly – Does not contain solvent thus no emission of vapours.
- Strong adhesion on wood grain, pipe lagging common building substrates.
- It is do it yourself product. It requires only onsite addition of water.

7.16 Dr. Fixit Pidicrete MPB



Important Technical parameters

Chloride content	Nil
Compressive strength	30 – 40 N/mm ² (Dry)
Adhesion to concrete	5 – 20 N/mm ² (Dry)
Curing efficiency	>55

Acrylic multi-purpose binder

Dr. Fixit Pidicrete MPB is composed of acrylic co-polymer emulsions & additives. It is used as bonding agent for new to old substrates & cement mortar modifier because it provides strong bonds to old & new concrete. Improves tensile & flexural strength of concrete and increases the durability of the structure.

Typical Applications

- Concrete repair – spalled concrete, floor, columns, beams, Chajja, slab & parapet
- Bond coat – Old to new concrete, masonry, stonework plaster, fixing slip bricks, tiles, marbles & bedding etc

Packaging

1, 5, 10, 20, and 225 kg

Features

- Provides excellent bond to concrete, masonry, stonework, plywood, gypsum & plaster.
- Compatible with all common cements hence it is versatile.
- Improves waterproofing properties when admixed with cement.
- Flexibility – Improves flexural strength of cementitious composition.

7.17 Dr. Fixit Zinc Rich Primer



Important Technical parameters

Specific gravity	1.85 ± 0.05 g/cc
Inter coat time @30°C	1 Hour
Hard drying time	24 hours
Full curing	7 days

For cathodic protection to rebar and steel structures

Dr. Fixit Zinc Rich Epoxy Primer is supplied as a single component grey-coloured liquid based on metallic zinc and epoxy resins, provide active galvanic protection to steel. Recommended for use where chloride induced attack on steel and anti-corrosion primer for exposed steel reinforcement.

Typical Applications

- For coating of re-bars and steel surfaces

Packaging

1 Litre

Features

- Active rich system combats corrosion by electro chemicals means.
- Excellent compatibility and suitable primer for steel surfaces and can be over coated by epoxy or polyurethane coatings.
- Bonds strongly to cement concrete & mortars.
- Chemical resistance – Resistance to commonly used acids & alkali.

7.18 Dr. Fixit Rust Remover



Important Technical parameters

Appearance	Water consistency liquid
Colour	Brown
PH	Acidic
Specific gravity	1.20 +/- 0.03

Liquid for cleaning rebars and steel structures

Dr. Fixit Rust Remover is based on chloride free chemical & additive solution in water. it is used as rust remover which effectively cleans rust from steel surfaces, before application of any protective coating.

Typical Applications

- On re-bars during repairs to reinforced concrete structures
- Maintenance of mild steel structures like tanks, water pipelines, shuttering plates and other corroded steel surfaces

Packaging

500 ml & 1 litre

Features

- Ease of application - Ready to use, easily applicable by brush.
- Effective rust removal even from areas difficult to reach & penetrate.
- Chloride free - Contains no chloride hence no chance of enhancing further corrosion.
- Economical - Cost effective because of good coverage.

7.19 Dr. Fixit Instant Leak Plug



Important Technical parameters

Pot life	2 minutes
Setting time	3 minutes
Compressive strength at 28 days	20 MPa
Flexural strength at 28 days	3 MPa

Rapid setting leak plugging compound

Dr. Fixit Instant Leak Plug is one component instant leak plugging compound is a rapid setting cement compound designed to stop active water leaks, seepage under pressure and leaking water through cracks or similar openings in concrete & masonry structures.

Typical Applications

- RCC water tanks and water retaining structures.
- Plugs running water leaks.
- Emergency repairs on concrete water pipes.
- Can be used to anchor fixings injection nozzles etc.

Packaging

1 Kg, 5 Kg

Features

- Quick Setting – Stops water leakage within 1-2 minutes on contact with water.
- Hardness – Hardens instantly under continuous wet condition.
- Effective wet crack sealing in concrete and masonry surfaces.
- Ease of application – No Curing required, can be applied by hand.

7.20 Dr. Fixit Pidicrete URP



Important Technical parameters

Solids % by mass	38 + 1 %
pH value	7.5 to 9.5
Specific gravity at 27.5°C	1 – 1.05
Nature	Translucent, free flowing liquid

SBR latex for waterproofing & repairs

Dr. Fixit Pidicrete URP is based on modified styrene butadiene latex supplied as a ready to use bonding agent in liquid consistency. It is used for repair of spalled concrete – floors, columns, beams, chajas, slabs as it bonds strongly to old & new concrete and to plasters.

Typical Applications

- For concrete repairs and as a bond coat for bonding of new concrete to old concrete, masonry stone work, plastering

Packaging

0.2 kg, 0.5 kg, 1 kg, 5 kg, 10 kg, 20 kg & 50 kg.

Features

- Prevents cracking by improving flexural strength.
- Reduces drying and aging shrinkage cracks.
- Bonds strongly to concrete, masonry, stonework, plasters, cementitious surfaces.
- Improves erosion resistance and prevents corrosion.



OTHER ANCILLARY PRODUCTS



8.1 Dr. Fixit Piditop 333



Important Technical parameters

Colour	Cement grey & others
Compressive strength at 28 days	45 N/mm ²
Abrasion Resistance (1000 cycles)	<1.5 grams
Resistance to wear	Passes

Non-metallic concrete floor hardner

Dr. Fixit Piditop 333 is composed of best quality ordinary portland cement, properly selected & graded washed & dried aggregates, polymer & additives. It is used as a concrete floor hardener for residential, commercial & industrial floors, because it imparts very high abrasion resistance as a monolithic surface.

Typical Applications

- Steel industries, Power stations, Heavy industry, Agricultural buildings & yards, Distillation plants, Desalination plants, Laboratories, Abattoirs, Warehouse floors etc

Packaging

25 Kg Bag

Features

- Excellent compressive strength increases wear resistance of concrete floors
- High abrasion & impact resistance provides erosion resistance due to movements of vehicular traffic.
- Smooth & hard surface prevents dust generation due to movements.
- Very low water absorption - Dense & low permeability substrate.

8.2 Dr. Fixit Repellin WR



Important Technical parameters

Surface dry time	20 - 25 minutes
Colour	Clear to pale yellow
Water repellency	Repel water in bead form
Water Absorption	Max 10%

Silicone based water repellant for exterior brick & stone masonry surfaces

Dr. Fixit Repellin WR is composed of Siloxane & Silane polymers dispersed in high boiling point solvent. It is used as water repellent of concrete & cementitious vertical walls of building because it penetrates deeply into the substrate & provides an effective water repellent protective coating.

Typical Applications

Water repellent treatment for -

- Clay brick surfaces
- Concrete, mortar
- Mangalore tiles
- Natural & artificial stones

Packaging

1, 10 & 225 litre

Features

- Staining - Clear coating does not stain the treated surface.
- Does not change the appearance of exterior decorative coating.
- Ease of application - Ready to use, brushable or spray applied.
- Due to low viscosity, penetration is high - which provides the hydrophobic zone.

8.3 Dr. Fixit Curing Compound



Important Technical parameters

Appearance	Milky white free flowing liquid
Solid content	38 to 42%
Surface drying time	Max 60 minutes
Daylight reflection	98%

Water based wax emulsion curing compound

Dr. Fixit Curing compound is a white pigmented, wax emulsion-based compound for curing of concrete. On drying, it forms a temporary membrane, which allows the concrete to retain sufficient water for optimum curing. It eliminates the need for keeping concrete continuously wet for minimum 28 days.

Typical Applications

- As a curing compound for all RCC structures

Packaging

200 litres

Features

- Forms efficient barrier for moisture for optimum curing of concrete.
- Eliminates requirement of water in traditional concrete curing method.
- Suitable for interior and exterior application.
- Minimizes chance of surface cracking.

8.4 Dr. Fixit Polybar Plus



Important Technical parameters

Volume expansion in concrete	250 %
Shore A Hardness	25+- 5
Hydrostatic head resistance	6 Bar
Volume expansion in 3% Salt water	200 %

Hydrophilic swellable water stopper for cast in situ concrete

Dr. Fixit Polybar Plus is a hydrophilic water stop based on synthetic rubber that acts as a watertight sealing for construction joints with excellent swelling capabilities. The product retains its own shape after multiple dry-wet cycles.

Typical Applications

- Construction joints (Horizontal & Vertical)
- Kicker joints
- Pile Caps
- Diaphragm walls
- Pipe entries

Packaging

20 mm x 10 mm - 10 mtr roll (50 Rmt/carton)
20 mm x 5 mm - 10 mtr roll (50 Rmt/carton)

Features

- Easy & fast to apply by adhesive or nailing.
- Consistence performance.
- Unaffected swelling properties by long term wet/dry cycling.
- Versatile solution for joints and detailing.

8.5 Dr. Fixit Pidiproof LW+



Important Technical parameters

Appearance	Free flowing liquid
Colour	Wine red
Chloride content	0.03 %
Dosage	200ml per 50 Kg bag of cement

Integral liquid waterproofing compound for concrete & plaster

Dr. Fixit Pidiproof LW+ is specially formulated integral liquid waterproofing compound composed of surface-active plasticising agents, polymers & additives. It is used as an additive for cement concrete, mortar & plasters. It makes concrete cohesive and prevents segregation.

Typical Applications

- As integral liquid waterproofing compound for Waterproofing of concrete and sand-cement mortars

Packaging

200 ml, 1, 5, 10, 20 & 100 litre

Features

- Workability: Improves workability of freshly mixed cement concrete
- Shrinkage: Reduces shrinkage crack development in plaster and concrete.
- Makes concrete more cohesive, hence protects steel better against corrosion.
- Permeability: Reduces permeability of water.

8.6 Dr. Fixit Plaster Master



Important Technical parameters

pH	11 to 14
Specific gravity	1.04 to 1.09
Compressive strength	As per IS: 2645:2003
Water permeability	Passes As per IS: 2645:2003

Liquid plasticizing & waterproofing compound

Dr. Fixit Plaster Master is specially formulated integral liquid waterproofing compound composed of surface-active plasticizing agents, polymer & additives specially formulated for use in Plastering. It is used as admixture for site-mixed cement mortar & plastering. It makes mortar mix cohesive and prevent segregation & facilitates excellent retention of workability and eliminates shrinkage cracks in mortar.

Typical Applications

- Internal Plastering, External plastering, Ceiling Plastering, Roof screeds, Bathroom screeds
- Waterproofing of cement sand mortars

Packaging

1, 5, 10, 20 Liters

Features

- Compatibility – Compatible with all cements, sand types (M Sand, River sand, Recycled sand).
- Offers Extended workability – No additional or very less water required for mix to remain workable.
- Significant reduction in water permeability.
- Overall offers higher durability.

8.7 Dr. Fixit All Seal



Important Technical parameters

Nature type	Bluish, Polymer
Total solids % by mass@ 105°C	45.0 to 48.0
Relative density	~1.0
pH	7.0 to 10.0

High strength si bond polymer for best-in-class waterproofing

Dr. Fixit All Seal is based on modified co-polymer enriched with special additive designed for cementitious composition. When added as a polymer, it offers excellent workability, uniform coating, stable slurry dispersion, easier and faster application resulting best waterproofing properties.

Typical Applications

- Waterproofing – Sunken portion of bathrooms and toilets, balconies etc.,
- Concrete Repair – Spalled concrete, repairing of beam etc.,
- Plaster Repair – Repairing plaster or making waterproof screed.
- As bond Coat

Packaging

1 kg, 5 kg, 10 kg, 20 kg

Features

- Shrinkage/crack control – High flexural / tensile strength to control cracking.
- Mortar modifier – Homogeneous fresh mix, easy to apply and place.
- Cracking / Shrinkage – Reduced shrinkage and cracking tendency.
- Repairs - Overall very high strength and durability

8.8 Dr. Fixit Seal Tape



Important Technical parameters

Colour	Grey
Elongation at break	≥500%
Tensile strength	≥12.5 N/mm²
Tear strength	≥200 N

Flexible polyolefin sealing tape for building joints & cracks

Dr. Fixit Seal Tape is a highly elastic, rot-proof and chemically resistant sealing membrane for installation on various building joints/cracks in critical areas with high and / or frequent movements. It is adhered to the substrate with an epoxy-based adhesive like Dr. Fixit Tape Adhesive.

Typical Applications

- Sealing of construction joints, expansion joints, connecting joints, cracks, and crevices, etc. that are subjected to considerable high and or frequent movements

Packaging

Dr. Fixit Seal Tape – 1 mm thickness and 150 /200 / 250 /300 mm wide X 20 M length

Features

- Long lasting elasticity (Elongation > 500%), even at high temperatures.
- Resistant to UV exposure.
- Can be applied horizontally, vertically, and even overhead.
- Resistant to a wide range of chemicals.

8.9

Dr. Fixit Tape Adhesive



Important Technical parameters

Compressive strength at 7 days	≥45 N/mm ²
Tensile strength at 7 days	≥18 N/mm ²
Shear strength at 7 days	≥8 N/mm ²
Flexural strength at 7 days	≥25 N/mm ²

Expansion joint tape adhesive

Dr. Fixit Tape Adhesive is a 2-Part high performance Epoxy adhesive specially designed for bonding Dr. Fixit Seal Tape series of Expansion joint tapes to different surfaces. It is solvent-free, non-sag, multipurpose bonding agent for suitable for use on horizontal and vertical surfaces.

Typical Applications

- Used as adhesive/bonding agent for bonding Dr. Fixit's Sealing Tape series joints tapes to treat Expansion Joint, Construction Joint, Crack treatment and Precast panels joint treatmet.

Packaging

6 Kg (4 Kg Resin +2 Kg Hardener).

Features

- Thixotropic - suitable for overhead and vertical applications.
- Extended pot life to ease positioning and alignment of expansion joint tapes / profiles.
- Suitable for use across wide temperature range (-) 30°C to 50°C.
- Excellent weather and water resistant.

8.11

Dr. Fixit Pipe Collar



Important Technical parameters

Tensile strength (L,T)	10, 2 N/mm ²
Elongation (L,T)	70, 300 %
Hydrostatic pressure resistance	>1.5 Bar
Chemical resistance	Resistant

Waterproofing pipe collar

Dr. Fixit Pipe Collar is a specially coated 3-ply elastic tape high tenacity system component which when used in combination with Dr. Fixit® waterproofing products reduces the risk of leaks through potential cracking locations around pipe penetrations.

Typical Applications

Waterproofing Pipe Collar used in combination with Dr. Fixit® waterproofing products around pipe inserts recommended for:

- For all the bore packing at terrace, wet areas and tanks etc

Packaging

90mm diameter:
300mmx300mm
10mm diameter:
120mmx120mm

Features

- Good Crack bridging, accommodating any cracks in the substrate formed at a later stage.
- Impermeable to Water and can be used both indoors and outdoors.
- Excellent adhesion to all the waterproofing products.
- Resistant to chemicals, can be used in chlorinated swimming pools.

8.10

Dr. Fixit Corner Joint Tape



Important Technical parameters

Tensile strength (L,T)	10, 2 N/mm ²
Elongation (L,T)	70, 300%
Hydrostatic pressure resistance	>1.5 Bar
Chemical resistance	Resistant

Waterproofing flashing tape for construction joints

Dr. Fixit Corner Joint Tape is a specially coated 3-ply elastic tape with high extension in cross direction and rigid lengthwise, thin, high tenacity system component which when used in combination with Dr. Fixit® waterproofing products reduces the risk of leaks through potential cracking locations.

Typical Applications

- Wall corners, floor-to-wall connections, pipe entries etc.

Packaging

120mm wide x 25-meter-long roll.

Features

- Good Crack bridging, accommodating any cracks in the substrate formed at a later stage.
- Can be used both indoors and outdoors.
- Excellent adhesion to all the waterproofing products.
- Resistant to chemicals, can be used in chlorinated areas.

8.12

Dr. Fixit Prebond DS Tape



Important Technical parameters

Flexibility at low temperature	No cracking at -25°C
Peel Adhesion Strength	1.25N/mm with HDPE membrane
Peel Adhesion Strength	0.5N/mm with concrete
Width	10 cm wide

Cold applied double sided tape with psa and release liner

Dr. Fixit Prebond DS Tape is a cold applied double-sided tape with pressure sensitive adhesive (PSA) and release liner on both sides. Its adhesive has perfect bonding with Pre-applied HDPE Waterproofing membranes and concrete.

Typical Applications

- Used as part of detailing with Dr. Fixit Prebond range of membranes

Packaging

Roll Size: 10 cm wide x 30 mtr length

Features

- Waterproof- provides effective protection against ground water.
- Adhesive- effective sealing.
- Wide range of application- effect on plastic, rubber and concrete surface.
- Low temperature resistance- function extremely well under adverse condition.

A close-up photograph showing a person's hands applying a repair tape to a crack in a concrete wall. The tape is black with a white strip in the center. The person is wearing a blue long-sleeved shirt. The crack is a deep, dark line in the grey concrete.

Elongation (compound)	> 500%
Water absorption at 24 hours	< 0.3
Water permeability at 5 Bar	Nil
Crack bridging ability	> 1.5mm

Dr. Fixit Bathseal Tape is a nonreinforced twin side adhesive bitumen membrane which comprises of polymerised bitumen sandwiched between a plastic released films on either side.

- Dr. Fixit Bathseal Tape is mainly used for providing a seamless waterproofing membrane on concrete, wood, metal surfaces. Most ideal for wrapping around the pipes that are inserted through concrete slabs and brick masonry walls in wet areas

Dr. Fixit Bathseal Tape membranes are supplied in rolls of 10 m and 1.5 m length and 100 mm width.

- Cold applied, self-adhesive and easy to apply.
- Bitumen to bitumen adhesion on the laps provides a seamless layer.
- Excellent adhesion to metals, PVC, wood, cementitious materials etc.
- Excellent resistance to chlorides, sulphates, dilute acids and alkalis.

[illegible]

NOTES

[illegible]



**ADVICE
CENTRE** 
1800 209 5504



Pidilite Industries Limited
Construction Chemicals Division
Ramkrishna Mandir Road Post Box No. 17411 Andheri (E) Mumbai 400059 INDIA

For any further clarifications or information kindly contact us at enquiry.plub@pidilite.com
The product technical specifications and information on the system detailing mentioned in the technical data sheet and system methodology must be observed.