

AUTOCLAVED AERATED CONCRETE(AAC) BLOCK



What is AAC?


AAC is Autoclaved Aerated Concrete. The blocks are made to aerate by creating a reaction between silica in base material such as fly ash or sand, active lime, and aluminum powder. The block hardness is being achieved by cement strength, and instant curing mechanism by autoclaving. Gypsum acts as a long term strength gainer.

ABOUT US

The most promising Manufacturer, Supplier, and Trader firm **NOVABLOCKS INDUSTRIES PVT. LTD.** was founded with the mission to innovate and differentiate in the AAC and Concrete Block production verticals. Our enduring alliances with a strong client base are backed with fair and honest dealings which make us accountable to broaden our product portfolio of quality approved materials, including best in class Autoclaved Aerated Concrete Block, AAC Block, and Lightweight AAC Blocks.


Eco Friendly | Long Life | Light Weight
Fire Resistant | Insulation

NOVABLOCKS INDUSTRIES PVT LTD is Leading Manufacturer of AAC Blocks (Autoclaved Aerated Concrete) Under Brand Name of 'NOVA GREENS'.

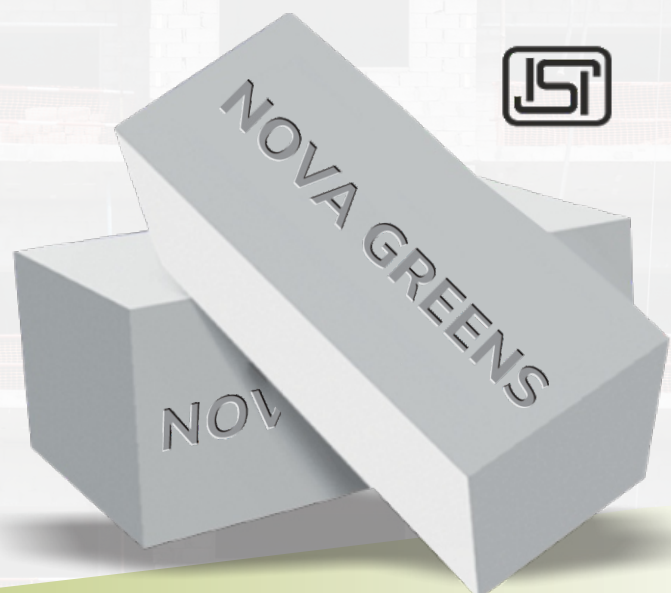




Sand AAC Block

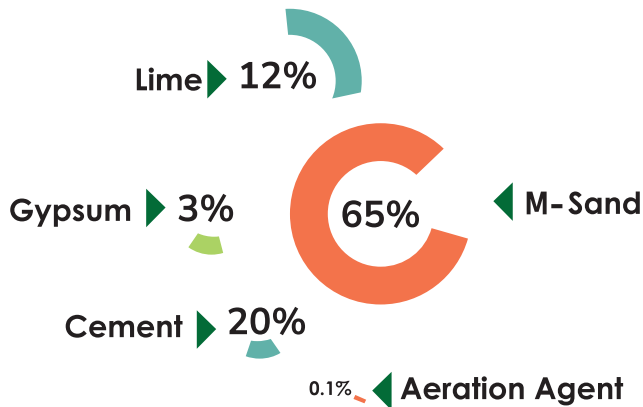

FLY-ASH AAC Block

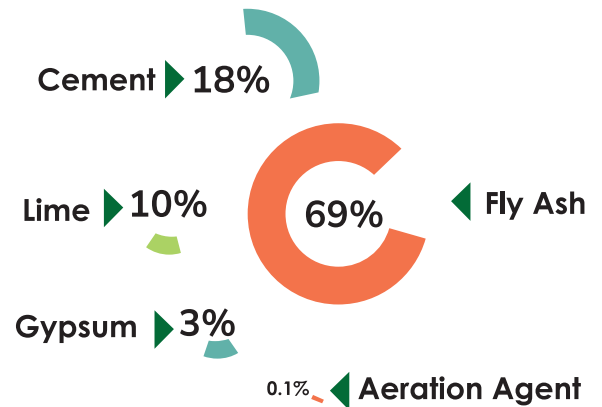


(* Quantities are subject to change with change in weather / quality of material)

Usage of Sand Base AAC Block & Fly Ash Base AAC Block




Nails can be put with normal hammer



Small Grooves and chases for services can be cut with a manual chasing tool.



Block can be drilled to provide electrical socket.



Take coping above 1.2 mtr height.

Sand base and Fly Ash Block

- (1) Sand based AAC Blocks :** Principal binding agent is lime. Lime has minimum impact of weather which results in better finish of wall.
- (2) Fly Ash AAC Blocks :** Green building material which is superior to clay bricks in all aspect.

Impact on project cost

Description	Saving	Overall Impact
Saving in cost of structure (Steel, Cement, Excavation)	18 - 20%	6%
Saving in mortar	65%	5%
Saving in plaster	40%	0.5%
Reduction in breakages	70%	0.5%
Saving due to lighter power infrastructure (transformer, Dg, Cable Sizes, Electricity Charges)	-	5%
Overall Saving		12%

Technical Details, Sizes of Nova Greens AAC Blocks

Technical Details

Dimensions (L x W)	600mm - 200mm
Thickness	75mm - 300mm
Compressive strength (N/mm ²)	> 4+
Dry Density (Kg/m ³)	551mm - 650mm
Thermal Conductivity (W/m-k)	0.12
Sound Reduction (db)	35-45
Fire Resistance	1600C/6hrs for 200mm thickness
Size Tolerance	+/- 5mm in length +/- 3mm in width & height
Shrinkage allowance	0.04%

As Per IS 2185 Part 3



Calculation sheet

Length (mm)	Height (mm)	Width (mm)	No of Pcs (Per m ³)	Work in Sq ft.** (Per m ³)
600	200	100	83.33	116.33
600	200	125	66.67	93.07
600	200	150	55.56	77.56
600	200	200	41.67	58.17
600	200	230	36.23	50.58

** Assumption: 4-5 mm Mortar Thickness



NOVABLOCKS INDUSTRIES PVT LTD

+91 75 67 96 97 00 | +91 75 67 96 97 97 | info@novagreens.in



509, Solaris Business Hub, Opp Parshwanath
Jain Mandir Brts , Bhuyangdev ,Sola Road,
Ahmedabad, Gujarat-380013