


# RSLogix Micro Project Report

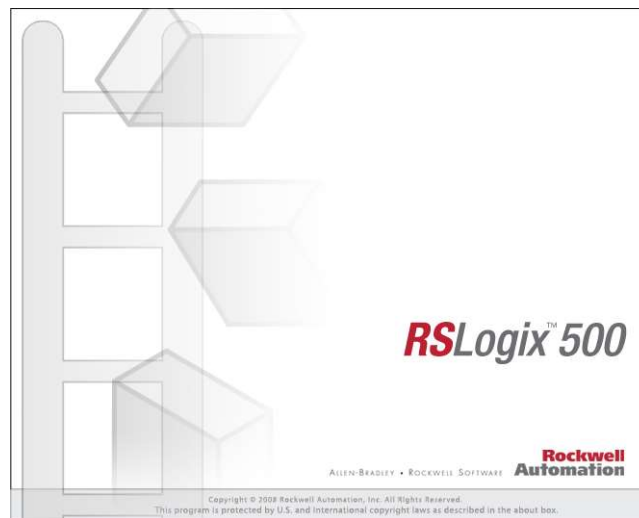

Processor Information

---

Processor Type: Bul.1763      MicroLogix 1100 Series B

Processor Name: UNTITLED

Total Memory Used: 195 Instruction Words Used - 62 Data Table Words Used

Total Memory Left: 6461 Instruction Words Left

Program Files: 5

Data Files: 9

Program ID: 66b4

## I/O Configuration

0	Bul.1763	MicroLogix 1100 Series B
1	1762-IQ8	8-Input 10/30 VDC
2	1762-OW8	8-Output Relay
3		
4		

## Channel Configuration

## CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex

CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Edit Resource/Owner Timeout: 60  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Passthru Link ID: 1  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Write Protected: No  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Comms Servicing Selection: Yes  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Message Servicing Selection: Yes  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 1st AWA Append Character: \d  
CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 2nd AWA Append Character: \a

Source ID: 1 (decimal)  
Baud: 19200  
Parity: NONE  
Control Line : No Handshaking  
Error Detection: CRC  
Embedded Responses: Auto Detect  
Duplicate Packet Detect: Yes  
ACK Timeout(x20 ms): 50  
NAK Retries: 3  
ENQ Retries: 3

## CHANNEL 1 (SYSTEM) - Driver: Ethernet

CHANNEL 1 (SYSTEM) - Driver: Ethernet Edit Resource/Owner Timeout: 60  
CHANNEL 1 (SYSTEM) - Driver: Ethernet Passthru Link ID: 1  
CHANNEL 1 (SYSTEM) - Driver: Ethernet Write Protected: No  
CHANNEL 1 (SYSTEM) - Driver: Ethernet Comms Servicing Selection: Yes  
CHANNEL 1 (SYSTEM) - Driver: Ethernet Message Servicing Selection: Yes


Hardware Address: 00:00:00:00:00:00  
IP Address: 0.0.0.0  
Subnet Mask: 0.0.0.0  
Gateway Address: 0.0.0.0  
Msg Connection Timeout (x 1mS): 15000  
Msg Reply Timeout (x mS): 3000  
Inactivity Timeout (x Min): 30  
Bootp Enable: Yes  
Dhcp Enable: No  
SNMP Enable: No  
HTTP Enable: Yes  
Auto Negotiate Enable: Yes  
Port Speed Enable: 10/100 Mbps Full Duplex/Half Duplex  
Contact:  
Location:


Program File List

Name	Number	Type	Rungs	Debug	Bytes
[SYSTEM]	0	SYS	0	No	0
	1	SYS	0	No	0
MAIN	2	LADDER	3	No	21
DIGITAL IO	3	LADDER	8	No	115
CONTROLS	4	LADDER	15	No	356


Data File List


Name	Number	Type	Scope	Debug	Words	Elements	Last
OUTPUT	0	O	Global	No	15	5	O:4
INPUT	1	I	Global	No	21	7	I:6
STATUS	2	S	Global	No	0	66	S:65
BINARY	3	B	Global	No	2	2	B3:1
TIMER	4	T	Global	No	15	5	T4:4
COUNTER	5	C	Global	No	3	1	C5:0
CONTROL	6	R	Global	No	3	1	R6:0
INTEGER	7	N	Global	No	1	1	N7:0
FLOAT	8	F	Global	No	2	1	F8:0

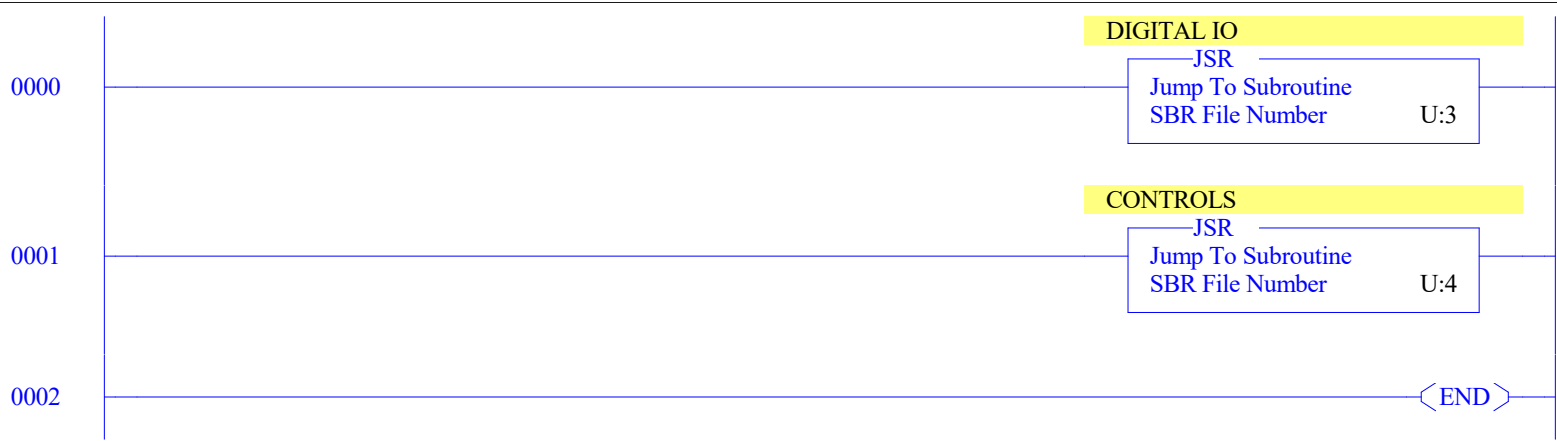

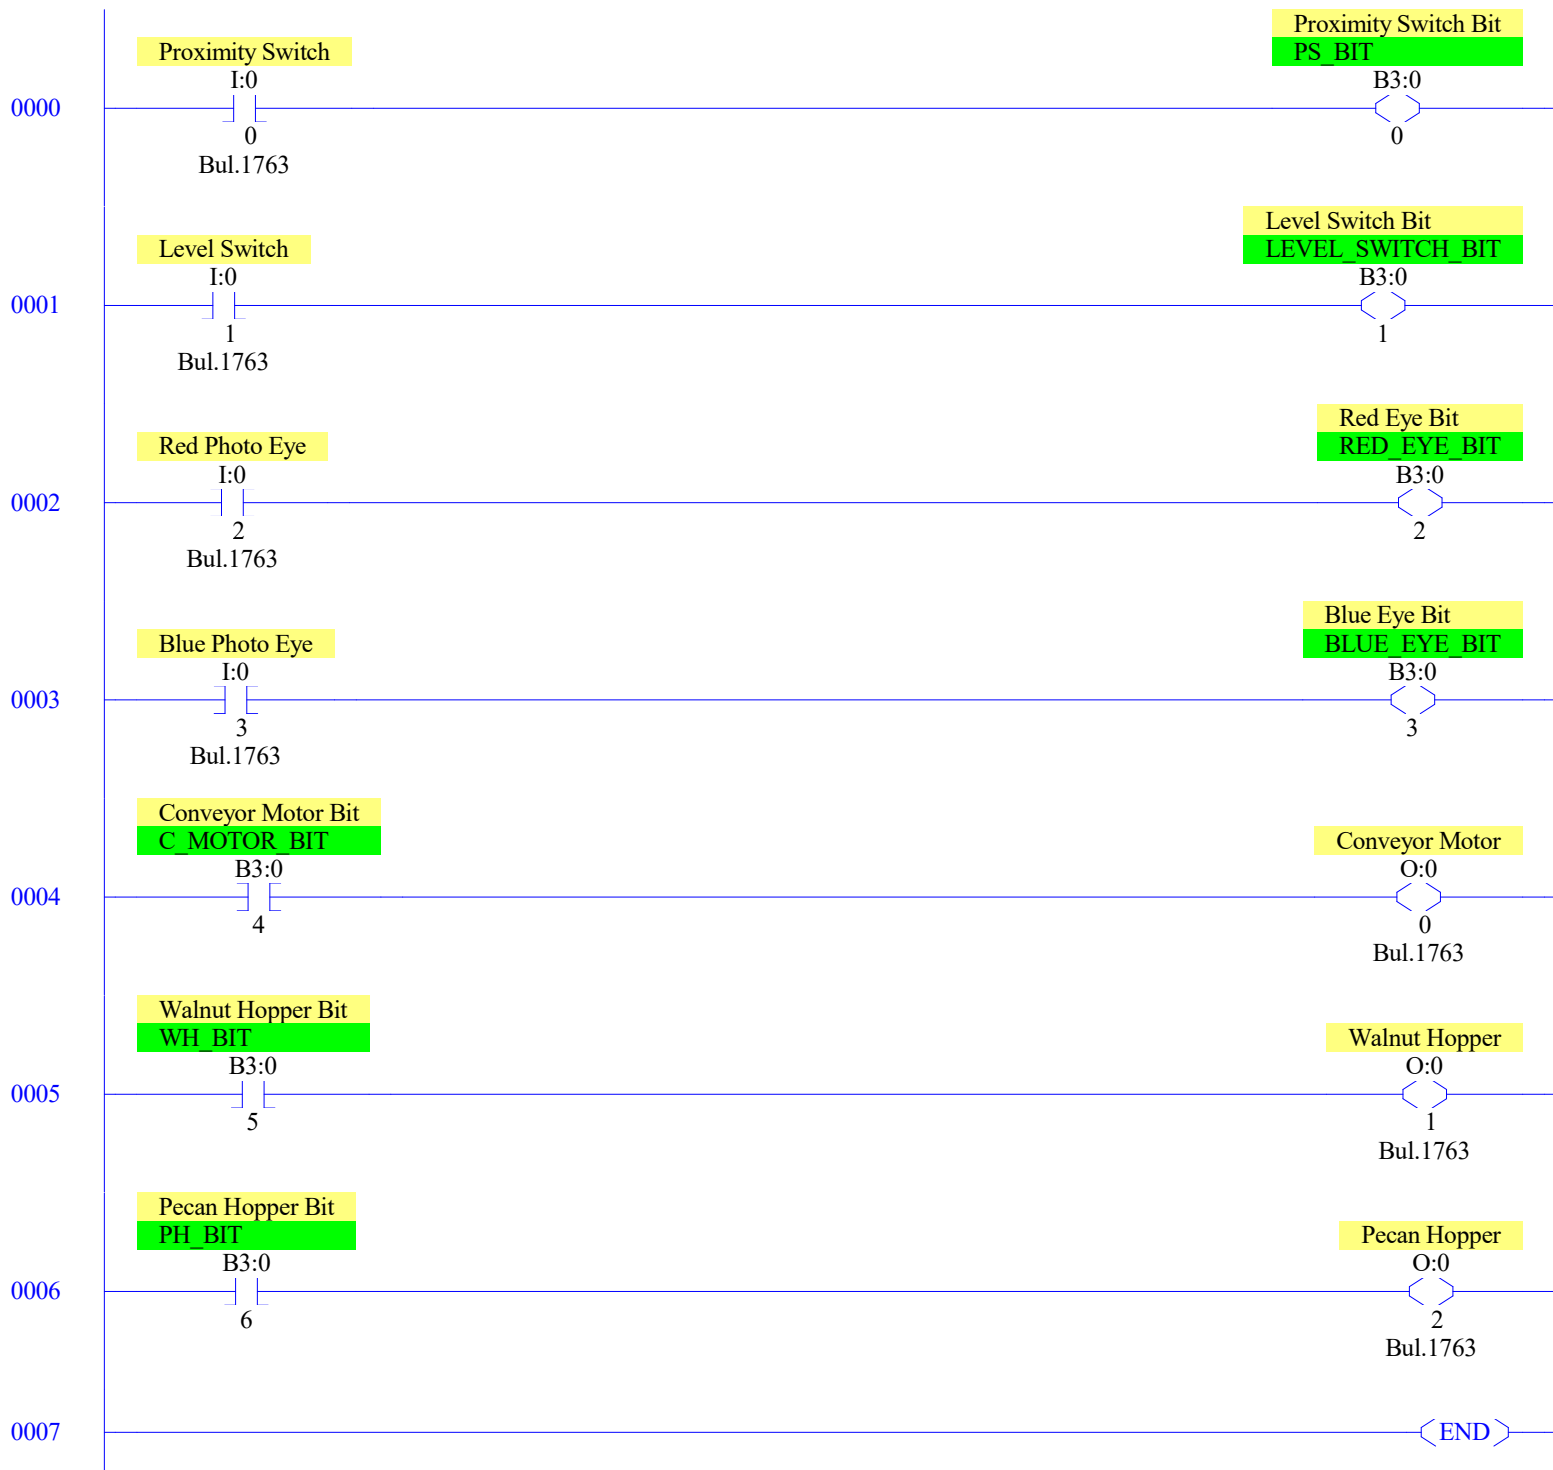



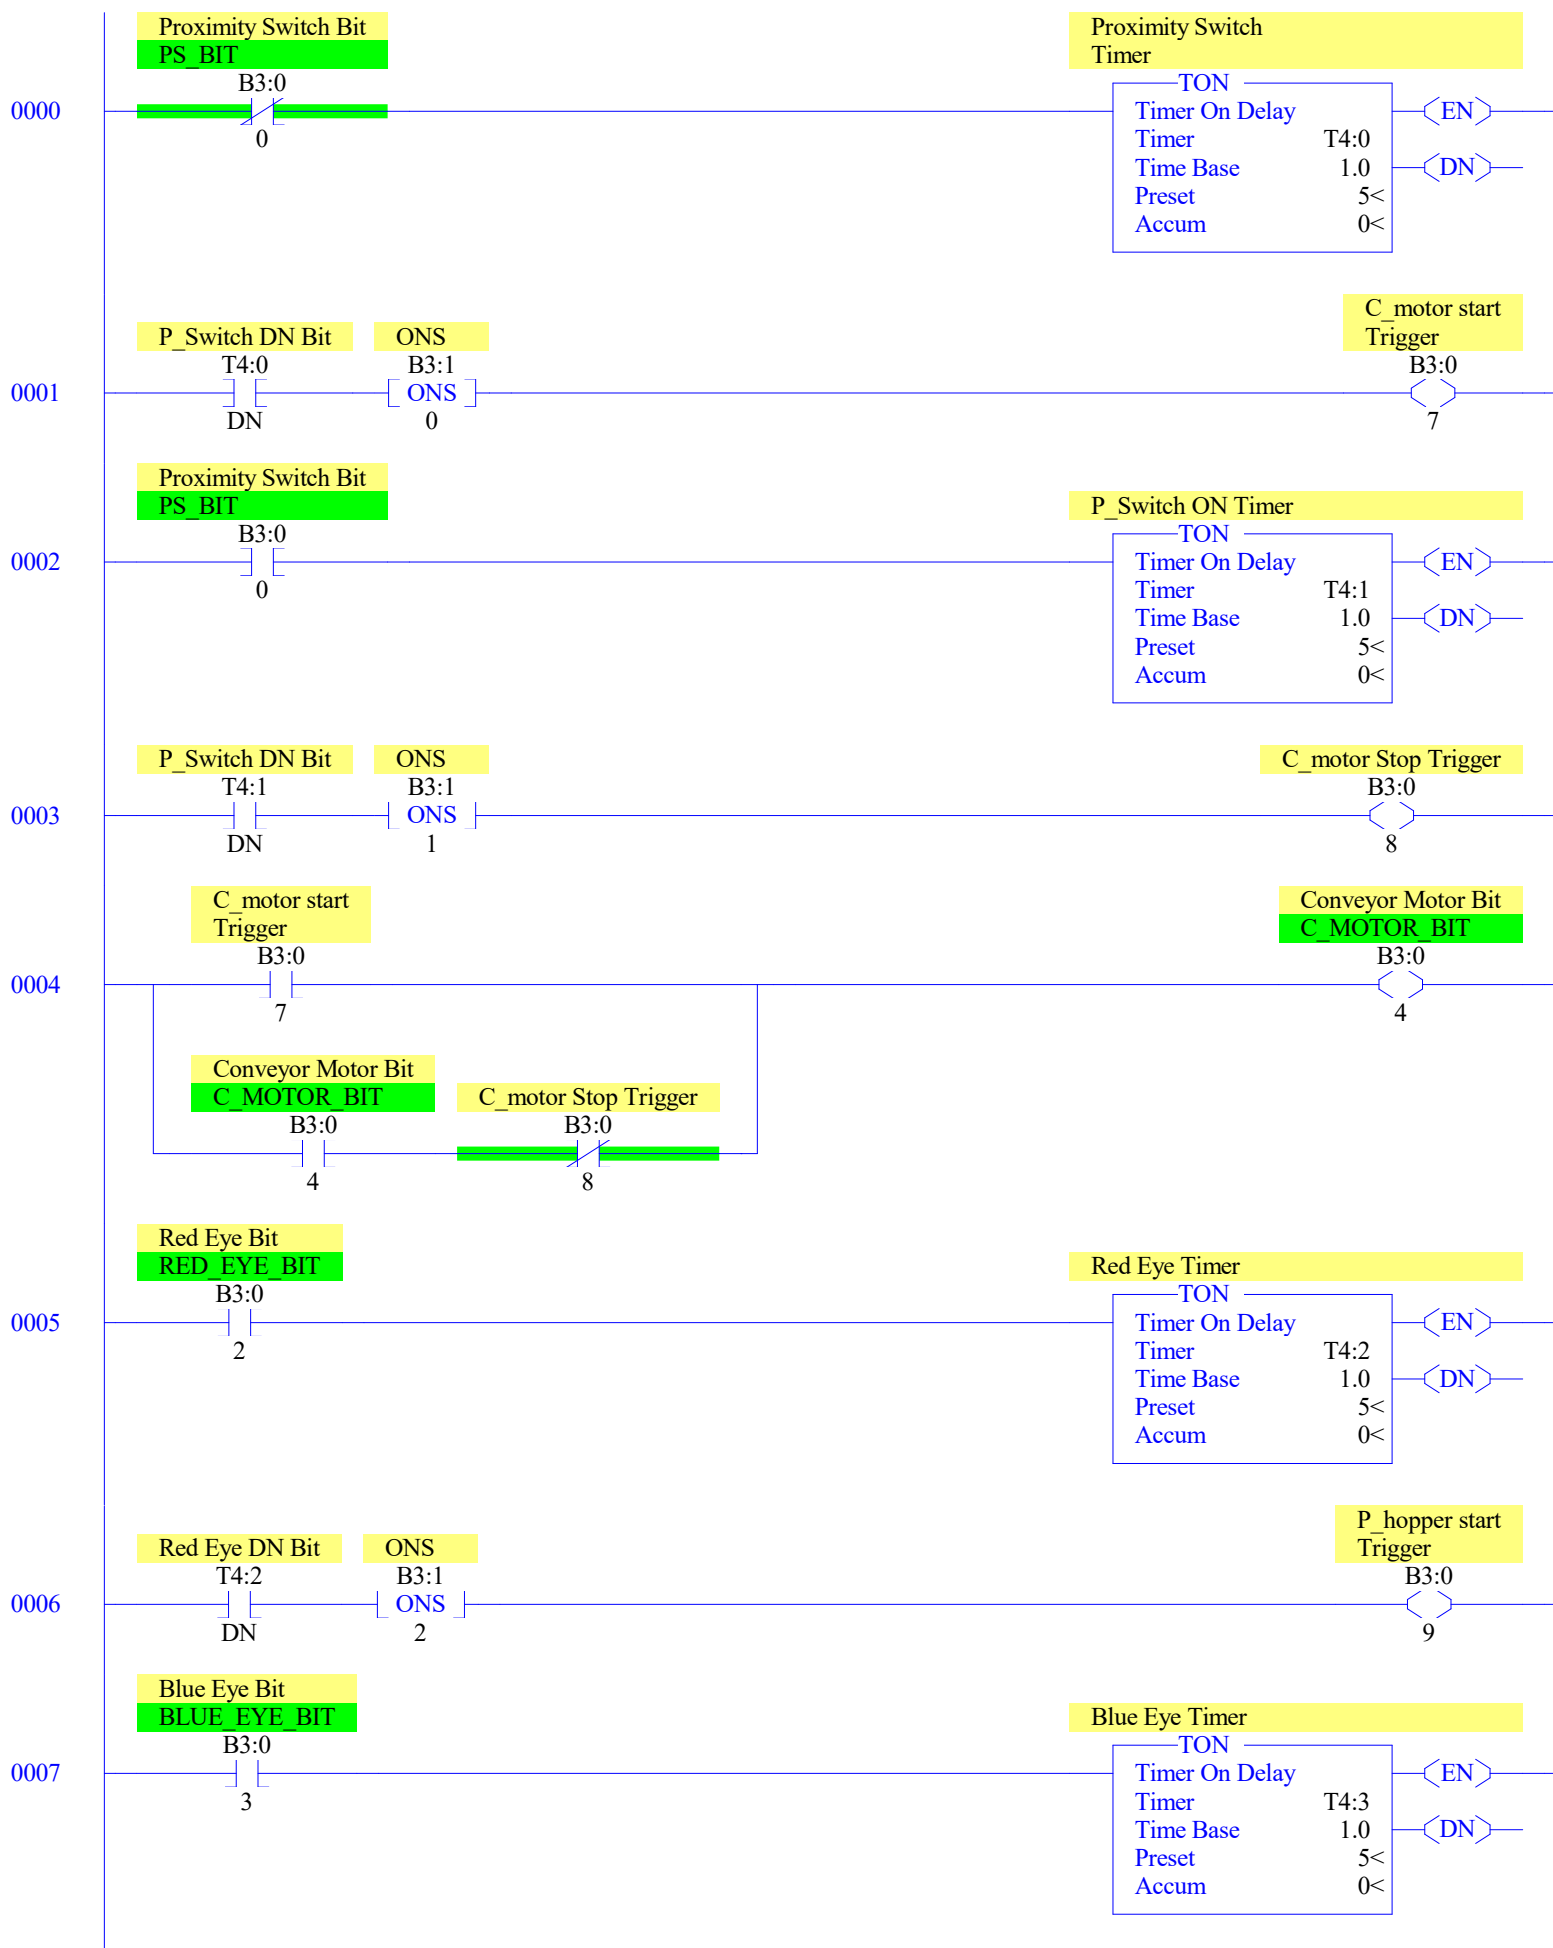

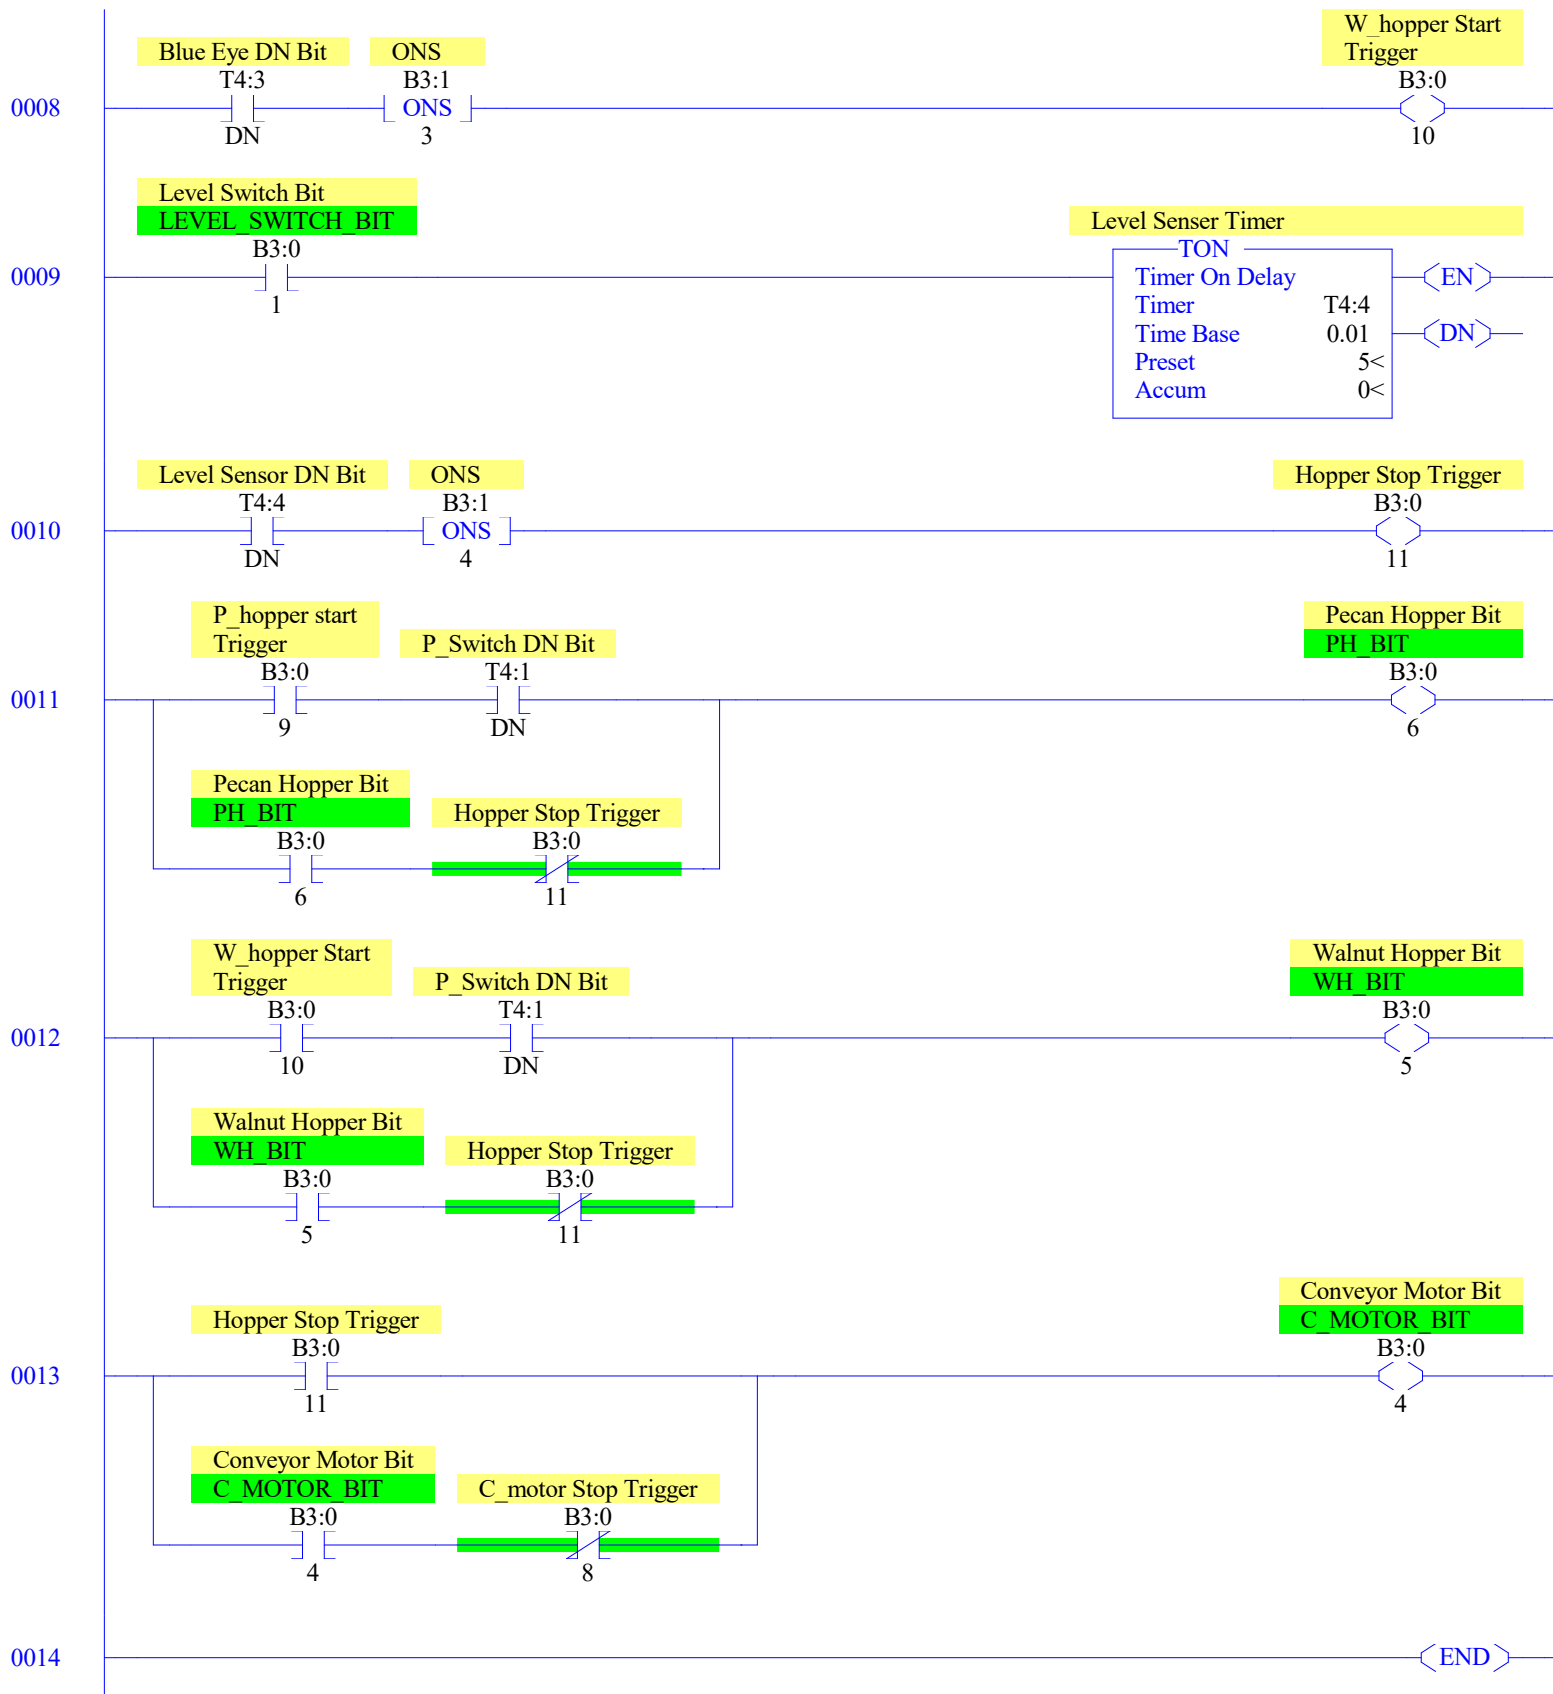

PROJECT2																
Data File 00 (bin) -- OUTPUT																
Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
O:0.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
O:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
O:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
O:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
O:2.0									0	0	0	0	0	0	0	1762-OW8 - 8-Output Relay

PROJECT2																	Data File I1 (bin)	--	INPUT
Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
I:0.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100	Series B
I:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100	Series B
I:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100	Series B
I:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100	Series B
I:0.4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100	Series B-Anal
I:0.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100	Series B-Anal
I:1.0									0	0	0	0	0	0	0	0	1762-IQ8	- 8-Input	10/30 VDC

**Main**

Processor Mode S:1/0 - S:1/4 = Remote Program Mode  
On Power up Go To Run (Mode Behavior) S:1/12 = 0  
First Pass S:1/15 = No  
Free Running Clock S:4 = 0000-0000-0000-0000

**Proc**

OS Catalog Number S:57 = 1100                      User Program Type S:63 = 8001h  
OS Series S:58 = A                                  Compiler Revision Number S:64 =  
OS FRS S:59 =  
Processor Catalog Number S:60 =  
Processor Series S:61 = A  
Processor FRN S:62 =

**Scan Times**

Maximum (x10 ms) S:22 = 0  
Watchdog (x10 ms) S:3 (high byte) = 10  
Last 100 uSec Scan Time S:35 = 0  
Scan Toggle Bit S:33/9 = 0

**Math**

Math Overflow Selected S:2/14 = 0                      Math Register (lo word) S:13 = 0  
Overflow Trap S:5/0 = 0                              Math Register (high word) S:14-S:13 = 0  
Carry S:0/0 = 0                                      Math Register (32 Bit) S:14-S:13 = 0  
Overflow S:0/1 = 0  
Zero Bit S:0/2 = 0  
Sign Bit S:0/3 = 0

**Chan 0**

Processor Mode S:1/0- S:1/4 = Remote Program Mode  
Node Address S:15 (low byte) = 0                      Outgoing Msg Cmd Pending S:33/2 = 0  
Baud Rate S:15 (high byte) = ?  
Channel Mode S:33/3 = 0  
Comms Active S:33/4 = 0  
Incoming Cmd Pending S:33/0 = 0  
Msg Reply Pending S:33/1 = 0

**Debug**

Suspend Code S:7 = 0  
Suspend File S:8 = 0

**Errors**

Fault Override At Power Up S:1/8 = 0                      Fault Routine S:29 = 0  
Startup Protection Fault S:1/9 = 0                      Major Error S:6 = 0h  
Major Error Halt S:1/13 = 0  
Overflow Trap S:5/0 = 0                              Error Description:  
Control Register Error S:5/2 = 0  
Major Error Executing User Fault Rtn. S:5/3 = 0  
Battery Low S:5/11 = 0  
Input Filter Selection Modified S:5/13 = 0  
ASCII String Manipulation error S:5/15 = 0

**Protection**

Deny Future Access S:1/14 = No  
Data File Overwrite Protection Lost S:36/10 = False

**Mem Module**

Memory Module Loaded On Boot S:5/8 = 0  
Password Mismatch S:5/9 = 0  
Load Memory Module On Memory Error S:1/10 = 0  
Load Memory Module Always S:1/11 = 0  
On Power up Go To Run (Mode Behavior) S:1/12 = 0  
Program Compare S:2/9 = 0  
Data File Overwrite Protection Lost S:36/10 = 0

**Forces**

Forces Enabled S:1/5 = Yes  
Forces Installed S:1/6 = No

Page 1 (Radix Binary) Monday, February 17, 2025 - 00:02:24

Offset	EN	TT	DN	BASE	PRE	ACC	(Symbol)	Description
T4:0	0	0	0	1.0 sec	5	0	Proximity Switch Timer	
T4:1	0	0	0	1.0 sec	5	0	P_Switch ON Timer	
T4:2	0	0	0	1.0 sec	5	0	Red Eye Timer	
T4:3	0	0	0	1.0 sec	5	0	Blue Eye Timer	
T4:4	0	0	0	.01 sec	5	0	Level Senser Timer	

Offset	CU	CD	DN	OV	UN	UA	PRE	ACC	(Symbol)	Description
C5:0	0	0	0	0	0	0	0	0		



Offset	EN	EU	DN	EM	ER	UL	IN	FD	LEN	POS	(Symbol)	Description
R6:0	0	0	0	0	0	0	0	0	0	0		

Data File N7 (dec) -- INTEGER

Offset	0	1	2	3	4	5	6	7	8	9
N7:0	0									

F8:0	0
------	---

## Address/Symbol Database

Address	Symbol	Scope	Description	Sym Group	Dev. Code	ABV
B3:0/0	PS_BIT	Global	Proximity Switch Bit			
B3:0/1	LEVEL_SWITCH_BIT	Global	Level Switch Bit			
B3:0/2	RED_EYE_BIT	Global	Red Eye Bit			
B3:0/3	BLUE_EYE_BIT	Global	Blue Eye Bit			
B3:0/4	C_MOTOR_BIT	Global	Conveyor Motor Bit			
B3:0/5	WH_BIT	Global	Walnut Hopper Bit			
B3:0/6	PH_BIT	Global	Pecan Hopper Bit			
B3:0/7			C_motor start Trigger			
B3:0/8			C_motor Stop Trigger			
B3:0/9			P_hopper start Trigger			
B3:0/10			W_hopper Start Trigger			
B3:0/11			Hopper Stop Trigger			
B3:1/0			ONS			
B3:1/1			ONS			
B3:1/2			ONS			
B3:1/3			ONS			
B3:1/4			ONS			
I:0/0			Proximity Switch			
I:0/1			Level Switch			
I:0/2			Red Photo Eye			
I:0/3			Blue Photo Eye			
O:0/0			Conveyor Motor			
O:0/1			Walnut Hopper			
O:0/2			Pecan Hopper			
S:0			Arithmetic Flags			
S:0/0			Processor Arithmetic Carry Flag			
S:0/1			Processor Arithmetic Underflow/ Overflow Flag			
S:0/2			Processor Arithmetic Zero Flag			
S:0/3			Processor Arithmetic Sign Flag			
S:1			Processor Mode Status/ Control			
S:1/0			Processor Mode Bit 0			
S:1/1			Processor Mode Bit 1			
S:1/2			Processor Mode Bit 2			
S:1/3			Processor Mode Bit 3			
S:1/4			Processor Mode Bit 4			
S:1/5			Forces Enabled			
S:1/6			Forces Present			
S:1/7			Comms Active			
S:1/8			Fault Override at Powerup			
S:1/9			Startup Protection Fault			
S:1/10			Load Memory Module on Memory Error			
S:1/11			Load Memory Module Always			
S:1/12			Load Memory Module and RUN			
S:1/13			Major Error Halted			
S:1/14			Access Denied			
S:1/15			First Pass			
S:2/0			STI Pending			
S:2/1			STI Enabled			
S:2/2			STI Executing			
S:2/3			Index Addressing File Range			
S:2/4			Saved with Debug Single Step			
S:2/5			DH-485 Incoming Command Pending			
S:2/6			DH-485 Message Reply Pending			
S:2/7			DH-485 Outgoing Message Command Pending			
S:2/15			Comms Servicing Selection			
S:3			Current Scan Time/ Watchdog Scan Time			
S:4			Time Base			
S:5/0			Overflow Trap			
S:5/2			Control Register Error			
S:5/3			Major Err Detected Executing UserFault Routine			
S:5/4			M0-M1 Referenced on Disabled Slot			
S:5/8			Memory Module Boot			
S:5/9			Memory Module Password Mismatch			
S:5/10			STI Overflow			
S:5/11			Battery Low			
S:6			Major Error Fault Code			
S:7			Suspend Code			
S:8			Suspend File			
S:9			Active Nodes			
S:10			Active Nodes			
S:11			I/O Slot Enables			
S:12			I/O Slot Enables			
S:13			Math Register			
S:14			Math Register			
S:15			Node Address/ Baud Rate			
S:16			Debug Single Step Rung			
S:17			Debug Single Step File			
S:18			Debug Single Step Breakpoint Rung			
S:19			Debug Single Step Breakpoint File			
S:20			Debug Fault/ Powerdown Rung			
S:21			Debug Fault/ Powerdown File			
S:22			Maximum Observed Scan Time			
S:23			Average Scan Time			
S:24			Index Register			
S:25			I/O Interrupt Pending			
S:26			I/O Interrupt Pending			
S:27			I/O Interrupt Enabled			
S:28			I/O Interrupt Enabled			
S:29			User Fault Routine File Number			
S:30			STI Setpoint			

## Address/Symbol Database

Address	Symbol	Scope	Description	Sym Group	Dev. Code	ABV
S:31			STI File Number			
S:32			I/O Interrupt Executing			
S:33			Extended Proc Status Control Word			
S:33/0			Incoming Command Pending			
S:33/1			Message Reply Pending			
S:33/2			Outgoing Message Command Pending			
S:33/3			Selection Status User/DF1			
S:33/4			Communicat Active			
S:33/5			Communicat Servicing Selection			
S:33/6			Message Servicing Selection Channel 0			
S:33/7			Message Servicing Selection Channel 1			
S:33/8			Interrupt Latency Control Flag			
S:33/9			Scan Toggle Flag			
S:33/10			Discrete Input Interrupt Reconfigur Flag			
S:33/11			Online Edit Status			
S:33/12			Online Edit Status			
S:33/13			Scan Time Timebase Selection			
S:33/14			DTR Control Bit			
S:33/15			DTR Force Bit			
S:34			Pass-thru Disabled			
S:34/0			Pass-Thru Disabled Flag			
S:34/1			DH+ Active Node Table Enable Flag			
S:34/2			Floating Point Math Flag Disable,Fl			
S:35			Last 1 ms Scan Time			
S:36			Extended Minor Error Bits			
S:36/8			DII Lost			
S:36/9			STI Lost			
S:36/10			Memory Module Data File Overwrite Protection			
S:37			Clock Calendar Year			
S:38			Clock Calendar Month			
S:39			Clock Calendar Day			
S:40			Clock Calendar Hours			
S:41			Clock Calendar Minutes			
S:42			Clock Calendar Seconds			
S:43			STI Interrupt Time			
S:44			I/O Event Interrupt Time			
S:45			DII Interrupt Time			
S:46			Discrete Input Interrupt- File Number			
S:47			Discrete Input Interrupt- Slot Number			
S:48			Discrete Input Interrupt- Bit Mask			
S:49			Discrete Input Interrupt- Compare Value			
S:50			Processor Catalog Number			
S:51			Discrete Input Interrupt- Return Number			
S:52			Discrete Input Interrupt- Accumulat			
S:53			Reserved/ Clock Calendar Day of the Week			
S:55			Last DII Scan Time			
S:56			Maximum Observed DII Scan Time			
S:57			Operating System Catalog Number			
S:58			Operating System Series			
S:59			Operating System FRN			
S:61			Processor Series			
S:62			Processor Revision			
S:63			User Program Type			
S:64			User Program Functional Index			
S:65			User RAM Size			
S:66			Flash EEPROM Size			
S:67			Channel 0 Active Nodes			
S:68			Channel 0 Active Nodes			
S:69			Channel 0 Active Nodes			
S:70			Channel 0 Active Nodes			
S:71			Channel 0 Active Nodes			
S:72			Channel 0 Active Nodes			
S:73			Channel 0 Active Nodes			
S:74			Channel 0 Active Nodes			
S:75			Channel 0 Active Nodes			
S:76			Channel 0 Active Nodes			
S:77			Channel 0 Active Nodes			
S:78			Channel 0 Active Nodes			
S:79			Channel 0 Active Nodes			
S:80			Channel 0 Active Nodes			
S:81			Channel 0 Active Nodes			
S:82			Channel 0 Active Nodes			
S:83			DH+ Active Nodes			
S:84			DH+ Active Nodes			
S:85			DH+ Active Nodes			
S:86			DH+ Active Nodes			
T4:0			Proximity Switch Timer			
T4:0/DN			P_Switch DN Bit			
T4:1			P_Switch ON Timer			
T4:1/DN			P_Switch DN Bit			
T4:2			Red Eye Timer			
T4:2/DN			Red Eye DN Bit			
T4:3			Blue Eye Timer			
T4:3/DN			Blue Eye DN Bit			
T4:4			Level Sensor Timer			
T4:4/DN			Level Sensor DN Bit			
U:3			DIGITAL IO			
U:4			CONTROLS			

Address	Instruction	Description
---------	-------------	-------------

Symbol Group Database

---

Group_Name	Description
------------	-------------