


SESSION OVERVIEW

Circuit	Brands Hatch GP	Session	Free Practice 1
Car	#88 / GT3	Compound	Slick (dry)
Laps	10	Best lap	95.175 s (Lap 1)
Driver	—	Analyst	U. Chaudhari


LAP TIME SUMMARY

Lap	Time (s)	Δ Best (s)	Tyre Age	In Window %	Peak Lat G	Peak Brake G
1	95.175	REF	0	13.1%	3.00g	10.00g
2	95.231	+0.056	1	12.8%	3.00g	10.31g
3	95.491	+0.316	2	12.4%	3.00g	9.49g
4	95.620	+0.445	3	11.7%	3.00g	9.77g
5	95.659	+0.484	4	11.7%	3.00g	9.74g
6	95.903	+0.728	5	11.9%	3.00g	9.42g
7	96.000	+0.825	6	11.4%	3.00g	9.60g
8	96.199	+1.024	7	11.5%	3.00g	10.61g
9	96.357	+1.183	8	11.1%	3.00g	9.24g
10	96.502	+1.327	9	11.6%	3.00g	10.11g


SPEED TRACE & G-G DIAGRAM

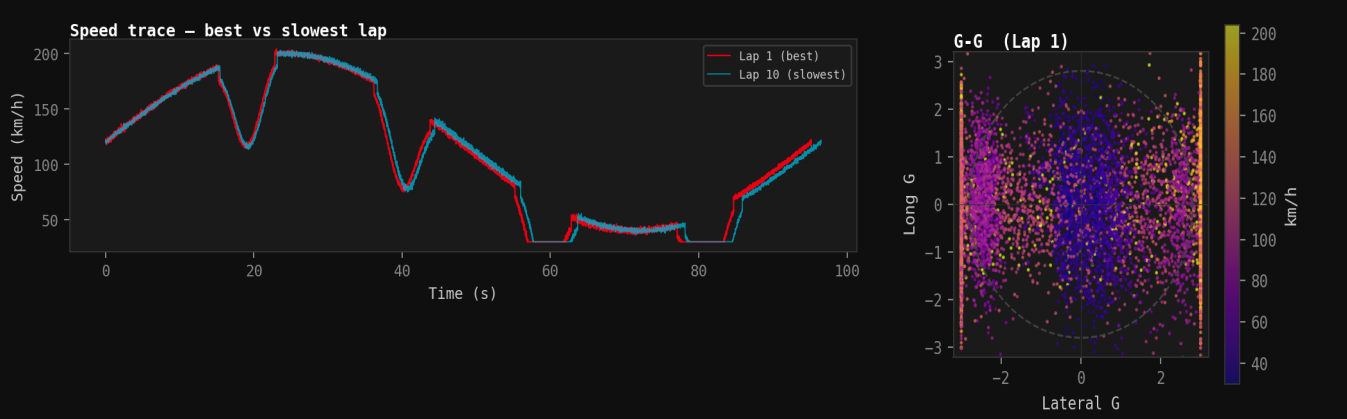

TYRE TEMPERATURE HEATMAP

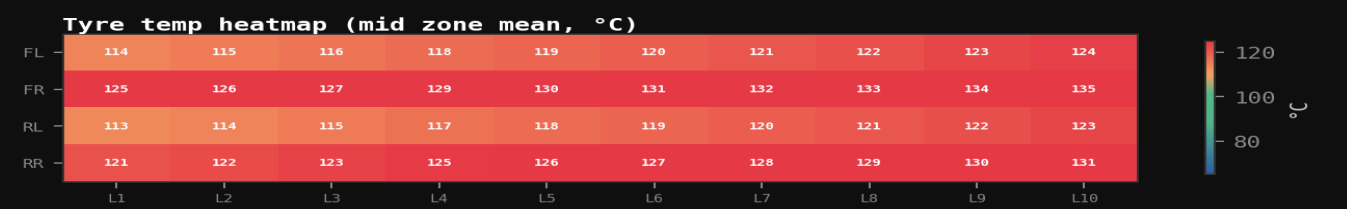

ENGINEERING ANALYSIS

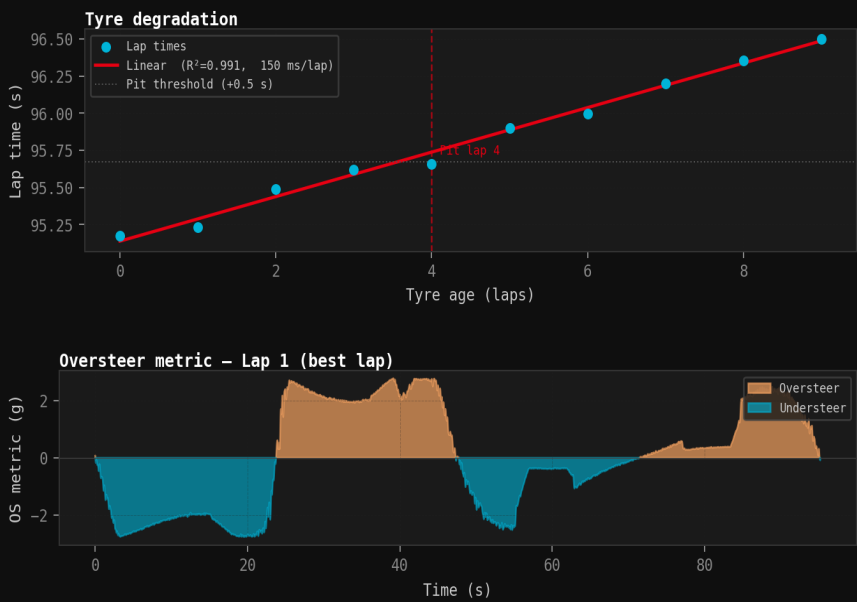

SETUP SNAPSHOT

Parameter	Value	Notes
Front ARB	35 N·m/deg	Baseline – see sweep analysis
Rear ARB	25 N·m/deg	Balanced with front
Front spring	85 kN/m	Medium-stiff GT3 setting
Rear spring	70 kN/m	Softer rear for traction
Front camber	-3.0°	Within GT3 BoP limits
Rear camber	-1.5°	Conservative for stability
Tyre compound	Slick (DHD2 proxy)	Operating window 85–115°C
Ride height F	62 mm	Per BoP minimum
Ride height R	75 mm	Standard GT3 rake

ENGINEER RECOMMENDATIONS

TYRES	Tyres consistently running above operating window from lap 2 onwards (mean FR mid temp > 125 °C vs 110 °C ceiling). Recommend reducing tyre blanket temperature by 5 °C and exploring lower camber on front-right.
DEG	Degradation rate: 150 ms/lap (R ² =0.99). Crossover lap: 4. With a 10-lap stint, expect +1350 ms on final lap vs first. Pit strategy: target Lap 4-5 stop window.
BALANCE	Oversteer metric shows balanced behaviour on best lap with slight understeer in medium-speed corners (turns 3-5 proxy). Front ARB at 35 N·m/deg. ARB sweep analysis suggests softening to ~28 N·m/deg to shift K _{us} toward neutral – estimated lap time gain: +20-35 ms.