
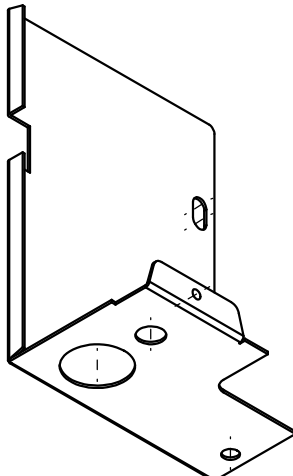
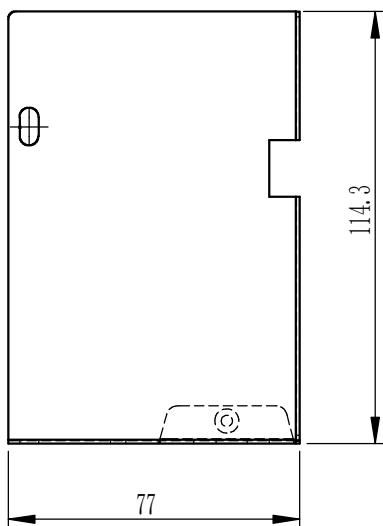
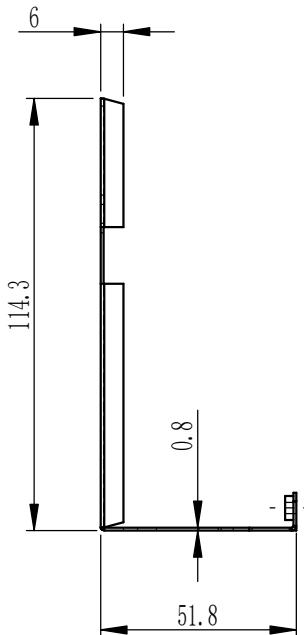



REV.	DATE	REVISION ORIGINOR	SIGN	ISSUED
Ⓐ				
Ⓑ				


b

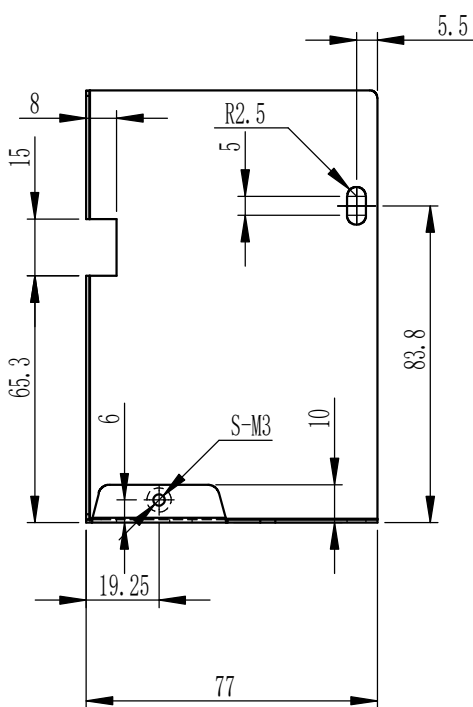

a

Technical requirements:  
1. Appearance: smooth and flat, remove burrs, sharp edges, no deformation ;  
2. The color of the surface powder is consistent with the drawing requirements or samples and color plates;  
3. Before spraying, it must be pickled and phosphated, without hanging drops, stripes, blistering, orange peel, peeling, scratches and other defects;  
4. The adhesion performance is reliable, and the marking test is not more than 1 grade. In general, coating The thickness is between 39~120um;  
5. Meet ROHS standard.

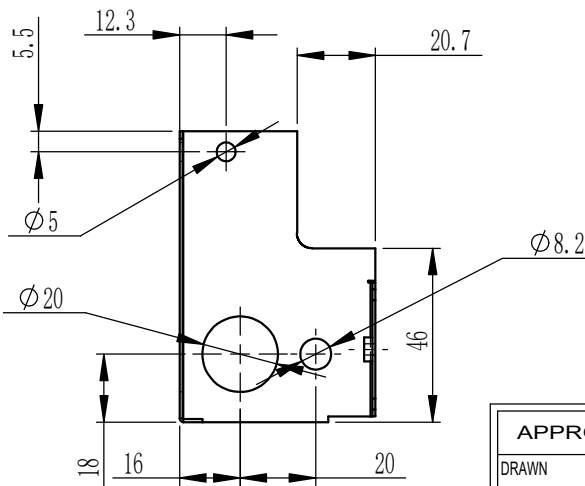

APPROVALS		DATE	ELEGOO 深圳市智能派科技有限公司					
DRAWN		2022/12/16	Shenzhen Elegoo Technology Co.,Ltd					
CHECKED			PART NAME		MATERIAL			
ISSUED			Power Supply Cover_Left		SPCC			
General Tolerance Reference GB/T 1804-m		DRAWING NO.  Neptune 3P-BJ-003		SIZE A4	SCALE 1:2	REV.  A		
				UNIT: MM		SHEET 1 OF 1		