


02/10/2025

Procédure

Routeur

Table des matières

Configuration du routeur 1

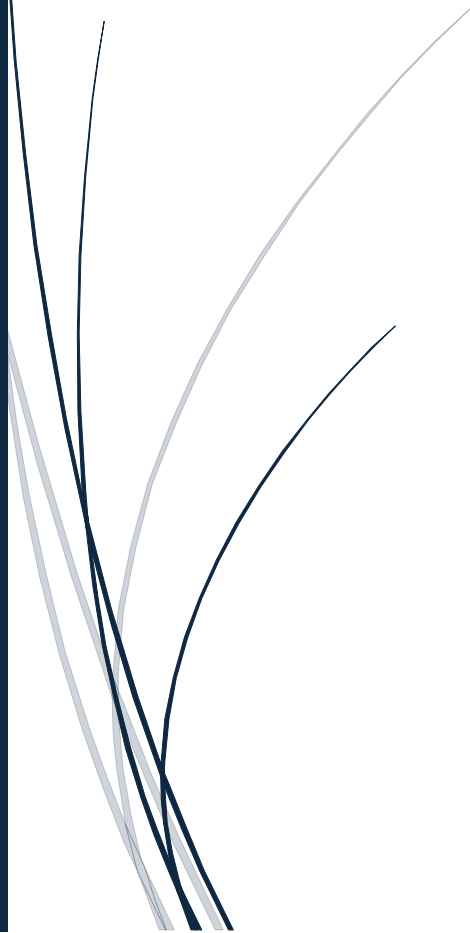

Valentin TRILLAUD
HPK

Configuration du routeur

Créer les sous-interfaces :

```
interface GigabitEthernet0/0.111
 encapsulation dot1Q 111
 ip address 192.168.111.254 255.255.255.0
!
interface GigabitEthernet0/0.112
 encapsulation dot1Q 112
 ip address 192.168.112.254 255.255.255.0
!
interface GigabitEthernet0/0.113
 encapsulation dot1Q 113
 ip address 192.168.113.254 255.255.255.0
!
interface GigabitEthernet0/0.114
 encapsulation dot1Q 114
 ip address 192.168.114.254 255.255.255.0
!
interface GigabitEthernet0/0.115
 encapsulation dot1Q 115
 ip address 192.168.115.254 255.255.255.0
!
interface GigabitEthernet0/0.116
 encapsulation dot1Q 116
 ip address 192.168.116.254 255.255.255.0
!
interface GigabitEthernet0/0.117
 encapsulation dot1Q 117
 ip address 192.168.117.254 255.255.255.0
!
interface GigabitEthernet0/0.211
 encapsulation dot1Q 211
 ip address 172.18.111.254 255.255.255.252
!
interface GigabitEthernet0/0.411
 encapsulation dot1Q 411
 ip address 172.16.111.254 255.255.255.0
!
```

Mettre l'IP Helper à chaque interface :

```

interface GigabitEthernet0/0.111
 encapsulation dot1Q 111
 ip address 192.168.111.254 255.255.255.0
 ip helper-address 172.16.111.2
 ip policy route-map VTR11
!
interface GigabitEthernet0/0.112
 encapsulation dot1Q 112
 ip address 192.168.112.254 255.255.255.0
 ip helper-address 172.16.111.2
 ip policy route-map VTR11
!
interface GigabitEthernet0/0.113
 encapsulation dot1Q 113
 ip address 192.168.113.254 255.255.255.0
 ip helper-address 172.16.111.2
 ip policy route-map VTR11
!
interface GigabitEthernet0/0.114
 encapsulation dot1Q 114
 ip address 192.168.114.254 255.255.255.0
 ip helper-address 172.16.111.2
 ip policy route-map VTR11
!
interface GigabitEthernet0/0.115
 encapsulation dot1Q 115
 ip address 192.168.115.254 255.255.255.0
 ip helper-address 172.16.111.2
 ip policy route-map VTR11
!
interface GigabitEthernet0/0.116
 encapsulation dot1Q 116
 ip address 192.168.116.254 255.255.255.0
 ip helper-address 172.16.111.2
 ip policy route-map VTR11
!
interface GigabitEthernet0/0.117
 encapsulation dot1Q 117
 ip address 192.168.117.254 255.255.255.0
 ip helper-address 172.16.111.2
 ip policy route-map VTR11
!

```

Puis créer une route map pour éviter les confusions entre les deux réseaux sur le routeur :

```

route-map VTR11 permit 10
 match ip address 10
 set ip next-hop 172.18.111.253
!
route-map ERO12 permit 12
 match ip address 12
 set ip next-hop 172.18.121.1
!
!
access-list 10 permit 192.168.111.0 0.0.0.255
access-list 10 permit 172.16.111.0 0.0.0.255
access-list 12 permit 192.168.121.0 0.0.0.255
access-list 12 permit 172.16.121.0 0.0.0.255
!
control-plane
!

```