

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - TE Connectivity Ltd.

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECR-20-013621	24SEP2020	R.M	S.H

SPECIFICATION:


1. CURRENT RATING: 3A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N ~ 20N
 7. UNMATING FORCE: 8N ~ 20N
 8. DURABILITY: 10,000 CYCLES
- OVERALL MATING FORCE AFTER DURABILITY: 0.60 KGF Min.

A1	GND	B12	GND
A2	TX1+	B11	RX1+
A3	TX1-	B10	RX1-
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	RX2-	B3	TX2-
A11	RX2+	B2	TX2+
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



30U"	2345986-3
15U"	2345986-2
G/F	2345986-1
GOLD PLATING THICKNESS	TEPN

6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	CLIP HOOK	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	Au PLATING /NI Plated	1SET
2	CONTACT	COPPER ALLOY	Au PLATING /NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY




THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± 0.15 4 PLC ANGLES ± - FINISH
MATERIAL	-

DWN R.ZHANG 30OCT2018	 TE Connectivity				
CHK R.MA 30OCT2018					
APVD S.LI 30OCT2018	NAME				
PRODUCT SPEC —		USB TYPE C 3.1 CONN. WITH 1.63 OFFSET TOP MOUNT DUAL ROW SMT TYPE			
APPLICATION SPEC —		RESTRICTED TO			
WEIGHT —		SIZE A3	CAGE CODE 00779	DRAWING NO C=2345986	—
CUSTOMER DRAWING			SCALE 1:1	SHEET 1 OF 2	REV R

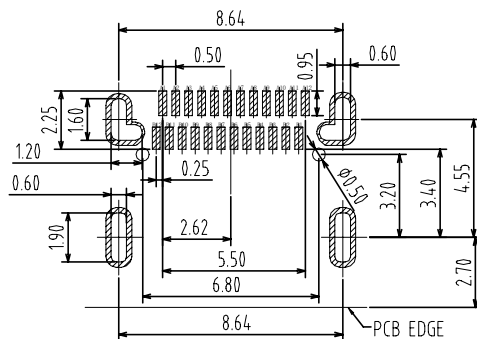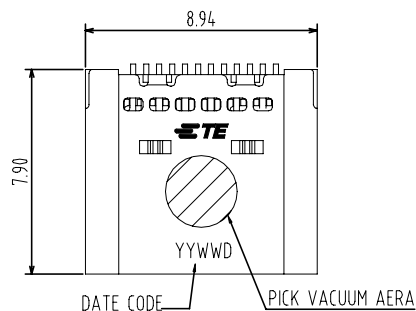

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

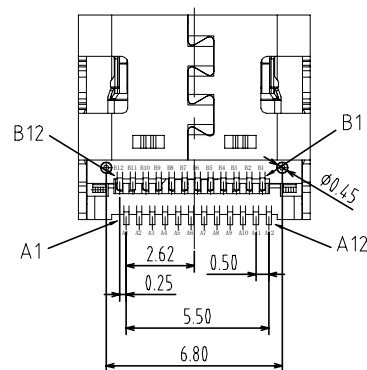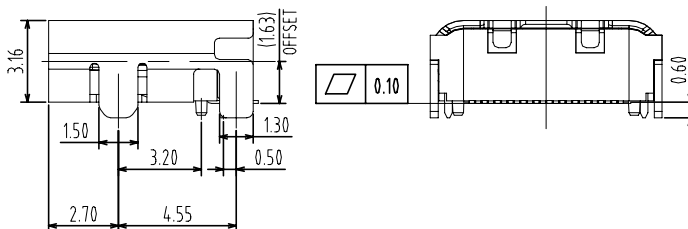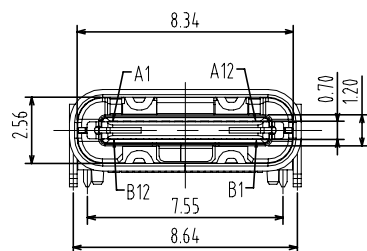

4

3

2

1

THIS DRAWING IS UNPUBLISHED.




RELEASED FOR PUBLICATION

© COPYRIGHT - TE Connectivity Ltd.

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

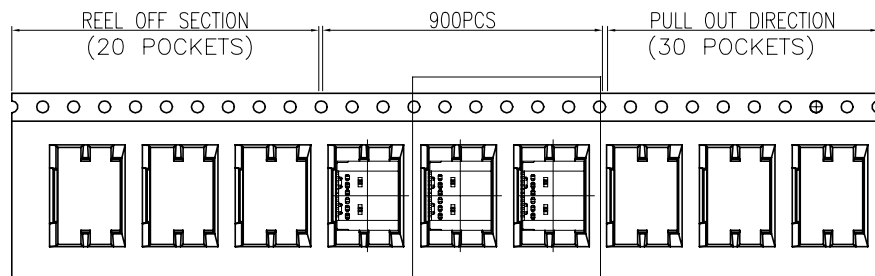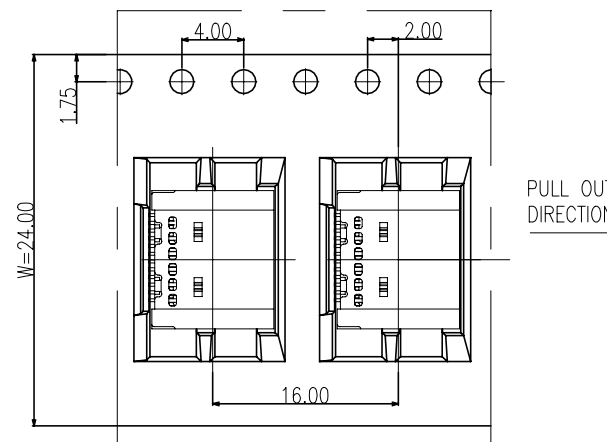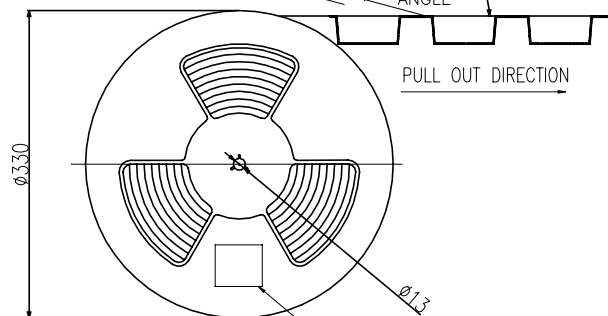REEL OFF
DIRECTIONPEELING
DIRECTION165°~180°
PEELING
ANGLEPULL OUT
DIRECTION

LABEL

PE BAG


REEL AND TAPE

REEL AND TAPE

FOLDER
PAPER BOARD


W+0.5

CARTON

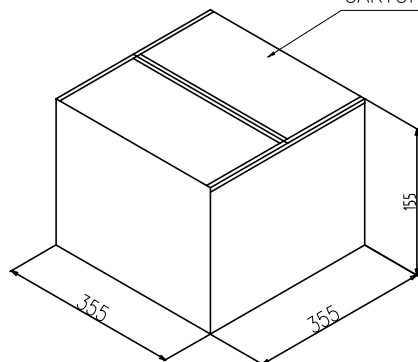

	REEL	CARTON
CONNECTOR (PCS)	900	4500

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± 0.35
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3°

FINISH

DWN	R.ZHANG	30OCT2018
CHK	R.MA	30OCT2018
APVD	S.LI	30OCT2018
PRODUCT SPEC	-	-
APPLICATION SPEC	-	-
WEIGHT	-	-

CUSTOMER DRAWING



TE Connectivity

NAME
USB TYPE C 3.1 CONN. WITH 1.63 OFFSET
TOP MOUNT DUAL ROW SMT TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=2345986	-

SCALE 1:1 SHEET 2 OF 2 REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2345986-1](#)