


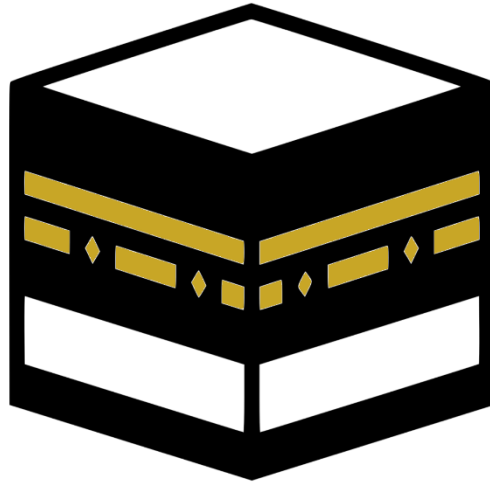

VATSIM SAUDI ARABIA
HAJJ OPS

Pilot Briefing Document

King Abdulaziz International Airport- OEJN

WARNING

All the following information documented is intended for flight simulation purposes and must not be used for any real-world aviation uses.

Table of Contents

1.	Introduction	2
1.1	Event Overview	2
1.2	Pilots Flying without Slots	2
1.3	Flight Plan	2
2.	Airport Information.....	3
2.1	Jeddah King Abdulaziz International Airport (OEJN)	3
2.1.1	Airport Overview	3
2.1.2	Hajj Terminal	3
2.1.3	Runway Physical Characteristics.....	3
2.1.4	Air Traffic Services	3
3.	Arrival Procedures.....	5
3.1	Standard Terminal Arrival Routes (STARs)	5
3.1.1	Radar Vectors on Downwind	5
3.1.2	Speed Restrictions	5
3.1.3	Altitude Restrictions	6
3.1.4	Initial Contact	6
3.2	Radar Vector Arrival	6
3.3	Runway Operations	7
3.3.1	Declared Distances (Landing)	7
3.3.2	Minimum Runway Occupancy Time	7
3.3.3	Standard Vacating Points	7
3.3.4	Missed Approach Procedure	7
3.4	Arrival Taxi Procedure	8
3.4.1	Arrival Taxi Routes (ATRs).....	9
3.5	Migat Al-Ihram (Ihram Zone) Instructions	9
4.	Enroute Holdings	10
5.	Event Support and Staff Contact.....	10

1. Introduction

1.1 Event Overview

During the annual Hajj season, an estimated 2.5 million pilgrims gather to partake in the sacred Hajj pilgrimage. To facilitate the transportation of these pilgrims, **King Abdulaziz International Airport** experiences a significant influx of air traffic, with approximately 10,000 flights operated by various airlines. These flights are specifically dedicated to carrying the pilgrims to the airport, where they then transport to the holy city of Mecca via train, to commence their Hajj rituals.

Hajj OPS is an event that simulates air traffic operations during the Hajj pilgrimage in Jeddah, Saudi Arabia, on the VATSIM network. It aims to recreate the influx of air traffic that occurs during the Hajj season.

1.2 Pilots Flying without Slots

It is mandatory for all pilots participating in the event to reserve a slot on book.vatsimsa.com.

Pilots who do not have a slot booked may face significant delays and are advised to carry additional fuel in case they need to hold in the air.

1.3 Flight Plan

Pilots are required to follow the designated route provided to them for their flight and should not take any shortcuts along the way without ATC permission. Taking shortcuts may impact their **estimated time of arrival (ETA)** and potentially result in the loss of their assigned arrival slot.

Furthermore, pilots are kindly requested to ensure they have the most up-to-date **Aeronautical Information Regulation and Control (AIRAC) cycle** installed in their navigation database.

2. Airport Information

2.1 Jeddah King Abdulaziz International Airport (OEJN)

2.1.1 Airport Overview

King Abdulaziz International Airport (OEJN) is a significant airport serving the cities **Jeddah and Mecca** in Saudi Arabia. It's situated 19 kilometers north of Jeddah and covers an extensive area of 105 square kilometers. Opened in 1981, it replaced the former Kandara Airport and is named after the founder of Saudi Arabia, King Abdulaziz.

The airport is the busiest in the kingdom and the third-largest by land area and features a royal terminal and three operational passenger terminals, including a dedicated Hajj Terminal for the Islamic Hajj pilgrimage season.

2.1.2 Hajj Terminal

2.1.3 Runway Physical Characteristics

Runway	Dimensions (m)	True Bearing	Elevation	Slope
34L	3800 x 60	340.00	14	0.0%
16R	3800 x 60	160.00	14	0.0%
34C	4000 x 60	340.00	28	-0.06%
16C	4000 x 60	160.00	28	+0.33%
34R	4000 x 60	340.00	49	-0.14%
16L	4000 x 60	160.00	30	+0.14%

2.1.4 Air Traffic Services

2.1.4.1 ATS Airspace

Airspace Type	Airspace	Class	Vertical Limits	Controller
Control Zone	Jeddah CTR	D	SFC - 2500ft	AIR 1, AIR 2
Terminal Maneuvering Area	Jeddah TMA Part 1	C	1500ft - FL150	APP 1, FIN
Terminal Maneuvering Area	Jeddah TMA Part 2	A	FL150 - FL195	APP 1
Control Area	Jeddah CTA East	A	FL150 - FL600	CTR 1
Control Area	Jeddah CTA West	A	FL150 - FL600	CTR 2

2.1.4.2 ATS Positions

Radio Callsign	Logon Callsign	Abbreviation	Frequency (MHz)
Jeddah Arrival ATIS	OEJN_A_ATIS	A-ATIS	126.200
Jeddah Departure ATIS	OEJN_D_ATIS	D-ATIS	128.700
Jeddah Delivery	OEJN_DEL	GMP	121.800
Jeddah Ground	OEJN_W_GND	GMC W	121.600
Jeddah Ground	OEJN_E_GND	GMC E	121.900
Jeddah Ground	OEJN_C_GND	GMC C	121.700
Jeddah Tower	OEJN_W_TWR	AIR W	118.200
Jeddah Tower	OEJN_E_TWR	AIR E	118.500
Jeddah Tower	OEJN_C_TWR	AIR C	118.300
Jeddah Approach	OEJN_APP	APP 1	124.000
Jeddah Final	OEJN_FE_APP	FIN E	123.800
Jeddah Final	OEJN_FW_APP	FIN W	124.675
Jeddah Terminal Control	OEJN_W_CTR	CTR W	125.450
Jeddah Terminal Control	OEJN_E_CTR	CTR E	119.100
Jeddah Terminal Control	OEJN_WU_CTR	CTR WU	124.825

3. Arrival Procedures

3.1 Standard Terminal Arrival Routes (STARs)

Depending on the runway configuration, pilots may anticipate the following Standard Terminal Arrival Routes (STARs):

Runway	Runway	STAR
E Arrivals	34R 16L	VEMEM2N VEMEM2S
SE Arrivals	34R 16L	BOSUT2N/IMLER1NxULULU2N BOSUT2S
N Arrivals	34L 16R	NOMDA2L NOMDA2R
W Arrivals	34L 16R	MUVOL2L MUVOL2R
SW Arrivals	34L 16R	EGMEG2L EGMEG2R

Arrivals from the SE may expect to transition from the BOSUT2N to the ULULU2N arrival via the IMLER1N Transition. Pilots shall be ready to transition to the new STAR at anytime.

3.1.1 Radar Vectors on Downwind

Traffic can expect standard vectors on Downwind.

Runway 34L	Runway 34R	Runway 16R	Runway 16L
Left 070, Left 010	Right 250, Right 310	Right 070, Right 130	Left 250, Left 190

3.1.2 Speed Restrictions

All speed restrictions on the STAR are mandatory and must be complied with unless otherwise instructed by ATC. Pilots shall strictly adhere to the speed assigned by ATC and shall request ATC approval before making any changes thereto. If it is essential to make an immediate temporary change in speed, *e.g. due to turbulence, ATC shall be notified as soon as possible.*

Pilots should anticipate the following standard speed restrictions. ATC will confirm speed restriction instructions.

Speeds	Position
280 - 250 Knots	From TMA entry to Downwind
230 – 210 Knots	On Downwind
210 -180 Knots	From Downwind to Base leg
190 - 160 Knots	On base leg and Closing Heading to Final Approach
180 Knots	10 NM from Touchdown
160 Knots	4 NM from Touchdown

If speed control is considered excessive or contrary to safe aircraft operation, ATC must be informed without delay.

3.1.3 Altitude Restrictions

All altitude restrictions on the STAR are mandatory and must be complied with unless otherwise instructed by ATC.

3.1.4 Initial Contact

3.1.4.1 Jeddah Approach

On initial contact with Jeddah Approach, aircraft are to pass the following information:

- Callsign and Passing Level
- Aircraft Type (include the word "HEAVY" if applicable)
- STAR designation
- ATIS information and QNH
- Advise in the event full length runway is required [If required]

3.1.4.2 Jeddah Final

When establishing initial contact with **Jeddah Final [FIN W/E]**, it is requested that pilots **ONLY** provide their callsign **WITHOUT ANY** additional information. The controller does not require any further details at that point.

3.2 Radar Vector Arrival

If pilots are unable to fly an RNAV (Area Navigation) Standard Terminal Arrival Route (STAR), they can anticipate receiving radar vectors from air traffic control upon arrival. The radar vectors given by APP 1/FIN will guide them along the appropriate route instead of following the predefined RNAV STAR.

3.3 Runway Operations

3.3.1 Declared Distances (Landing)

Runway	Landing Distance Available (at Threshold)
34L	3800 m
34R	4000 m
34C	4000 m
16L	4000 m
16C	4000 m
16R	3800 m

3.3.2 Minimum Runway Occupancy Time

To maximize runway utilization at **King Abdulaziz International Airport**, pilots **must** follow the following procedures:

1. Aircraft should vacate the runway promptly using a pre-planned runway exit point provided by the AIR [Tower]. This helps to ensure the efficient flow of traffic.
2. Pilots are reminded not to reduce speed to less than normal taxi speed until the aircraft has completely passed the runway holding point. This allows for continuous movement and prevents congestion.
3. After vacating the runway, pilots must immediately follow the assigned Arrival Taxi Route as directed by the AIR [Tower]. This helps to maintain orderly taxi operations and minimize delays.

3.3.3 Standard Vacating Points

During the final approach, pilots will receive a designated vacating point from AIR [Tower]. It is crucial for pilots to apply the appropriate brake power to ensure they neither overshoot nor undershoot the designated vacating point.

Pilots with confirmed bookings can anticipate being assigned the following vacating points:

Runway	Vacating Point
34L	B3, B5
34R	M4, M6, M7
16L	M4
16R	B2, B4

3.3.4 Missed Approach Procedure

Fly the published missed approach unless otherwise instructed by ATC.

3.4 Arrival Taxi Procedure

All aircraft participating in the event will be allocated a parking stand at either Apron 6 or Apron 7, specifically at the Hajj Terminal.

For aircraft vacating Runway 34R, they can expect to be assigned Vacating Point **M7** by AIR E (Tower East). They will then be provided with an Arrival Taxi Route of **M7O**. Control will be handed over to GMC E (Ground East), where the GMC controller will guide them via taxiway R. Depending on coordination with AIR, they may receive crossing clearance or be directed to AIR W (Tower West) or AIR C (Tower Central). After the handoff, they should continue taxiing via taxiway R and turn right onto taxiway F, leading to **Apron 6**.

For aircraft vacating Runway 34L, they should anticipate being assigned Vacating Point **B5** by AIR W. The assigned Arrival Taxi Route will be **B5O**, guiding them to **Apron 7** via taxiways B and D6.


Aircraft vacating Runway 16R will receive Vacating Point **B2** and follow the **B2O** Arrival Taxi Route provided by AIR W. This route will lead them to **Apron 7** via taxiways C and D5.

Aircraft vacating Runway 16L will be assigned Vacating Point **M5** and instructed to follow the **M5X** Arrival Taxi Route by AIR E. This route will guide them to **Apron 6** via taxiways MB, L, R, and F.

Please note that all aircraft landing on Runway 34L or 16R will be assigned Apron 7, while those landing on Runway 34R or 16L will be assigned Apron 6. Although Saudi aircraft typically park at Apron A in reality, for the event's convenience, they will also be directed to the Hajj Terminal. Saudi pilots landing on Runway 34R may request Apron A, although it deviates from realism.

3.4.1 Arrival Taxi Routes (ATRs)

Arrival Taxi Routes (ATRs) are short pre-defined initial taxi paths for traffic that are designed to maintain a smooth flow of traffic after aircraft vacate the runway. These routes are established to prevent traffic congestion around the RETs and to optimize the tower's efficiency by avoiding the need to provide initial taxiway instructions. Instead, the tower instructs the aircraft to follow one of the predetermined ATRs based on the assigned parking stand by the Ground (GND) controller.

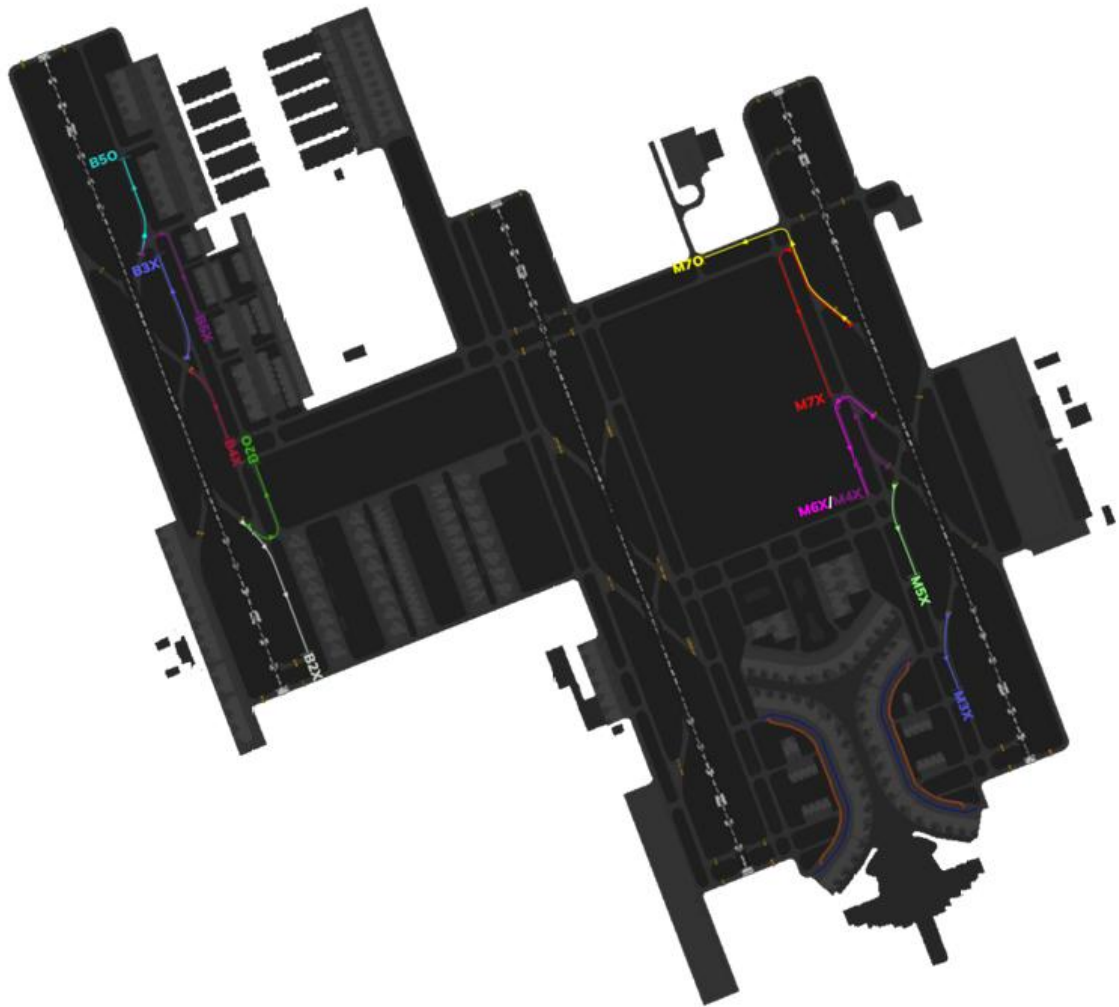

3.5 Migat Al-Ihram (Ihram Zone) Instructions

All carriers operating flights inbound to Jeddah are requested to announce passengers wishing to perform Hajj or Omrah ***“we will pass abeam Migat Al-Ihram (Ihram Zone) after 30 minutes from now”*** and they are requested to repeat the announcement **5 minutes** before passing Migat Al-Ihram. Charts Available In Appendix A.

4. Enroute Holdings

When the **Terminal Maneuvering Area (TMA)** reaches full capacity, pilots can anticipate being directed to unpublished holding patterns at the entry points of VEMEM, BOSUT, MUVOL, EGMEG, and NOMDA.

5. Event Support and Staff Contact

Should you have any further questions, feel free to ask us any one of our planning team members.

Event Manager: Ismail Hassan – ACCSA1 | ismail.hassan@vatsimsa.com

Planning Team Email: hajj@vatsimsa.com

