




VBCore CAN FD Raspberry PI HAT v1.0

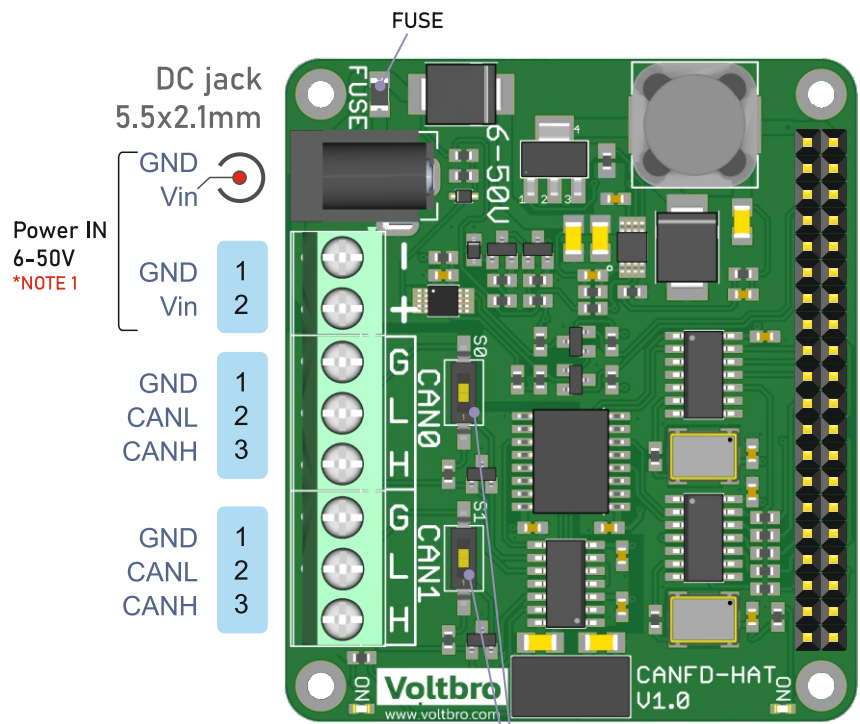

Power IN
6-50V
*NOTE 1



Raspberry PI headers

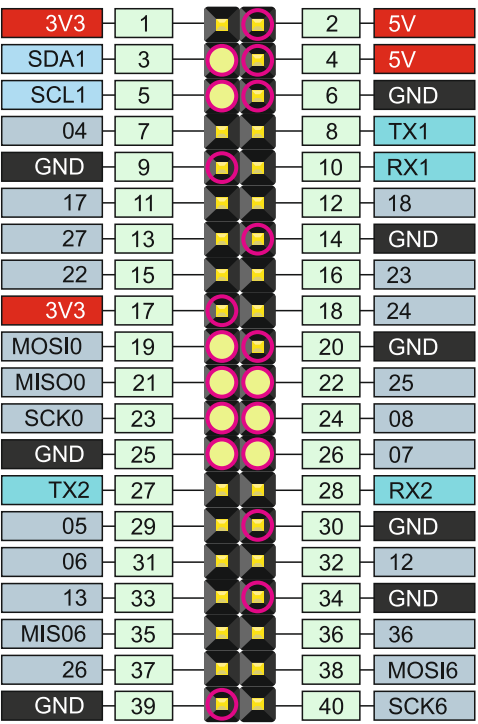

Connected pins
Shared pins
Free pins

Voltage controll

ADS1115
16-Bit I2C ADC

Controll	PIN	I2C
AIN0	1/11 Vin	
ADR	GND	0x48
SCL	GPIO2	SDA
SDA	GPIO3	SCL

CAN0 Channel

MCP2518FD
CAN FD Controller with SPI Interface

Controll	PIN	Header
MISO	GPIO9	21
MOSI	GPIO10	19
SCK	GPIO11	23
CS	GPIO8	24
INT	GPIO25	22

CAN1 Channel

MCP2518FD
CAN FD Controller with SPI Interface

Controll	PIN	Notes
MISO	GPIO9	21
MOSI	GPIO10	19
SCK	GPIO11	23
CS	GPIO7	26
INT	GPIO24	18

VBCore Raspberry PI CAN/CANFD HAT v1.0

VIN: 6-50V
CAN FD CONTROLLER: MCP2518FD
CAN TRANSCEIVER: MCP25612FD
I2C Voltage control
CAN / CAN-FD channels: 2
Dimensions: 65x56mm
Mount holes: 58x49mm D2.5 mm

NOTES:

- DC jack and terminals are parallel - not connect simultaneously
- I2C lines SCL and SDA lines pulled up

VBCores

www.vbcores.com
Electronics for robotics
research and development