

VBcores Servo Board v0.2

Motor supply voltage selection jumper

Open: 12 V.
Closed: 24 V.
This setting applies only when the motor supply source is DC-DC.
The motor supply voltage cannot exceed VIN.

Motor supply source selection jumper.



1. DC-DC output: 12V or 24V, 5 A max.
 2. Raw VIN: 12-45V, unregulated.
- The motor supply voltage cannot exceed VIN.

SERVO, 7ch JST connector

GND
5.8V, 5A max
PB14
PB1
PB0
PA6
PA4
PA0
PA1

Analog in 5ch, 3.3V MAX XH2.54 connector

GND
3.3V
PC5
PC3
PC2
PC1
PC0

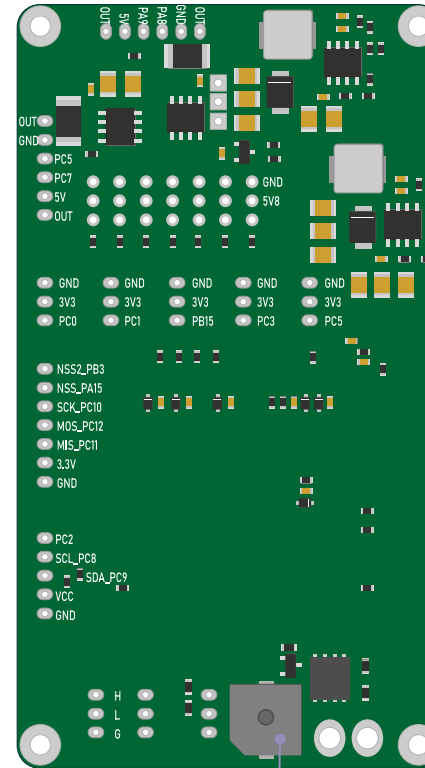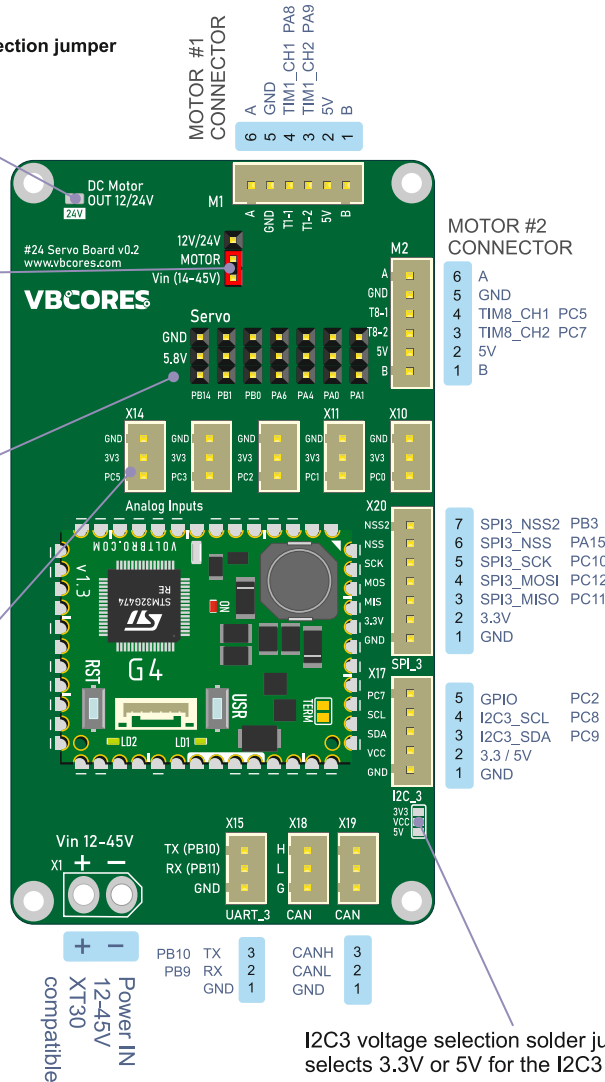

Motor driver

TI DRV8870, 45V, 3.5A
Brushed DC Motor Driver (PWM Control)

Control	PIN	Notes
IN1 (Motor 1)	PA8	TIM1_CH1
IN2 (Motor 1)	PA9	TIM1_CH2
IN1 (Motor 2)	PC5	TIM8_CH1
IN2 (Motor 2)	PC7	TIM8_CH2
VREF	PB14	3.3A max
R_ISEN		0,15 Ohm

Input voltage sensing

Divider ratio: 1:16

Control	PIN	ADC
VIN_SENSE	PA7	ADC2_IN4

VBcores Servo board v0.2

VIN: 12-45 V DC
MCU: VB32G4 (STM32G474RE)
7 × servo outputs, 5.8V, 5A max
5 × analog/GPIO inputs, 3.3V max
2 × DRV8870 brushed DC motor drivers
Motor supply: 12/24 V DC-DC output, 5A max, or raw VIN
2 × A/B encoder interfaces
Interfaces: SPI, I2C, UART, CAN/CAN FD
Input voltage monitoring
Buzzer
Dimensions: 56 × 101 mm
Mounting holes: 50 × 95 mm, Ø2.5 mm

NOTES:

1. Motor drivers start operating at a minimum supply voltage of 9 V.
2. Maximum motor current is limited to 3.3 A.
3. For motors without encoders, use only the Motor A and Motor B terminals.
4. Servo supply voltage is 5.8 V. Make sure your servos support this voltage.
5. Servo signal pins use 3.3 V logic. Do not apply voltages above 3.3 V.
6. Maximum voltage on analog input pins is 3.3 V.
7. Maximum voltage on the SPI3 connector is 3.3 V.
8. I2C3 lines are compatible with both 3.3 V and 5 V logic levels.
9. UART logic level is 3.3 V.

VBcores

www.vbcores.com

Electronics for robotics
research and development