

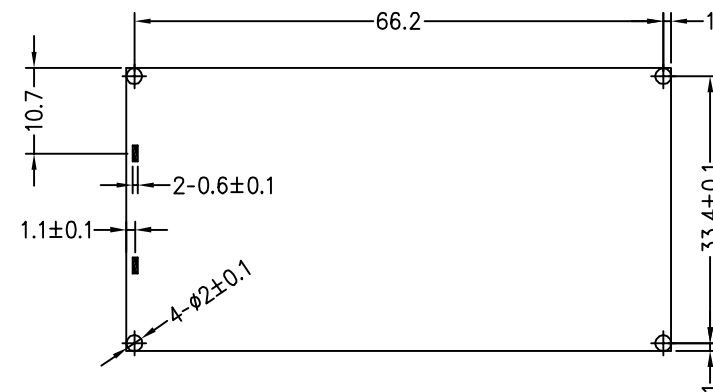
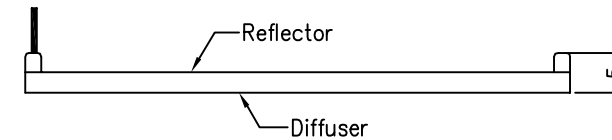
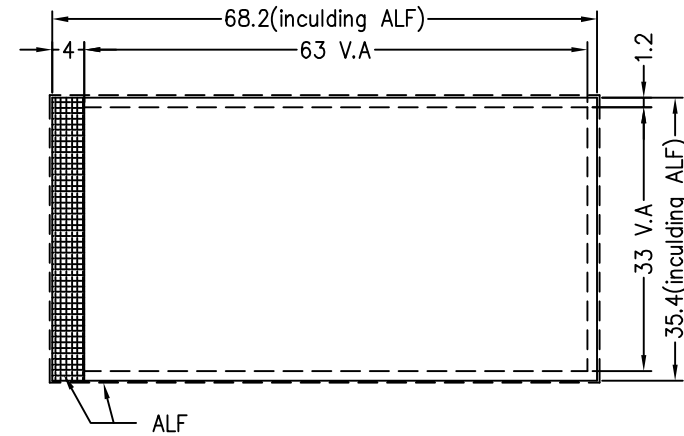


REV	REVISION RECORD	APPROVED
△	First Issue	

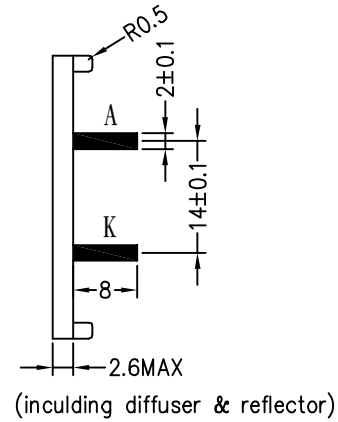

NOTES:

1. Forward current: 50mA (VF=3.3V)
2. LED emission color: White
3. Color coordinates: $X=0.28 \pm 0.03$
 $Y=0.29 \pm 0.03$
4. Brightness: 200cd/m²
6. Operation temperature: -30°C~+70°C
7. Storage temperature: -40°C~+80°C
8. Lead free process
9. LED circuit: 1X5=5 dies



General Tolerance	±
0-5	0.05
5-10	0.1
10-30	0.2
30-50	0.3
50-100	0.5
100-150	0.8



	VERSION	DATE	PART NAME:
	A	2010.11.15	
SCALE	NO.	UNIT	TITLE:
1:1	1/1	mm	
APPROVED	CHECKED	DRAWN	FILE NAME: