



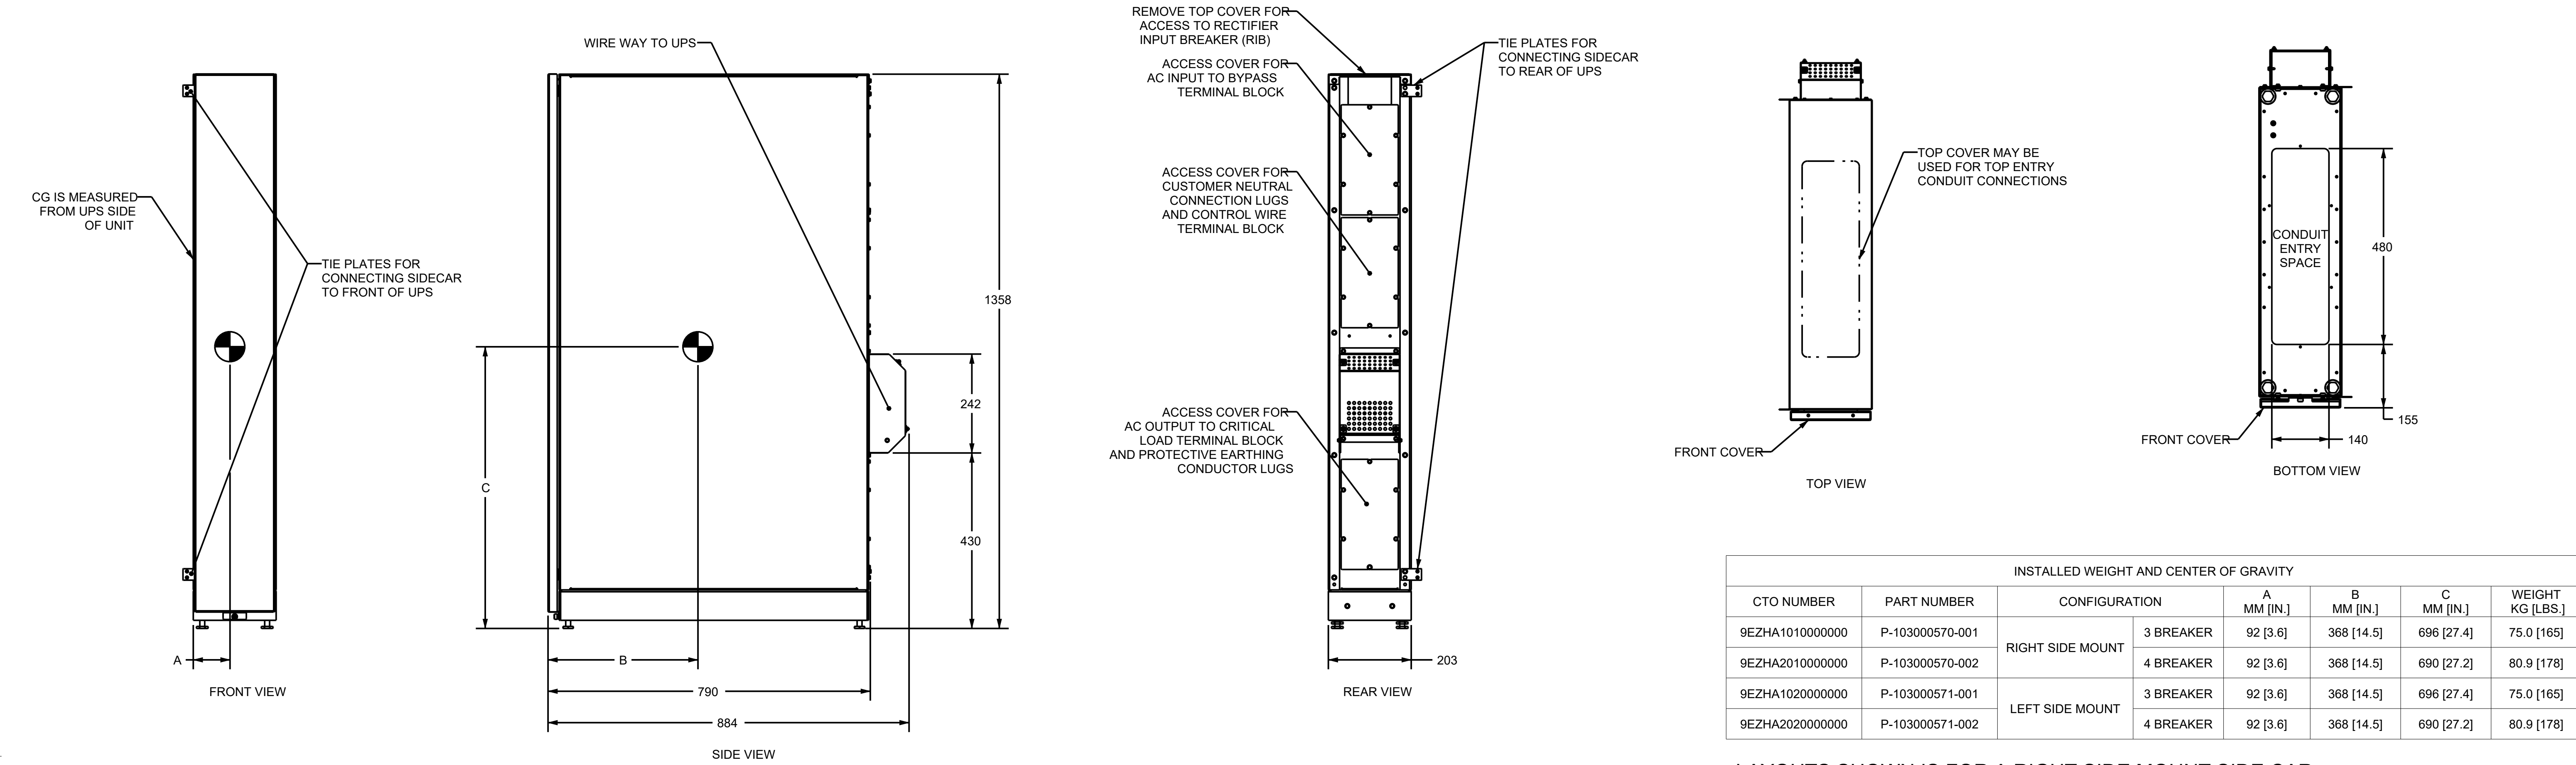


LAYOUTS SHOWN IS FOR A RIGHT SIDE MOUNT SIDE CAR.
THE LEFT SIDE MOUNT SIDE CAR (NOT SHOWN) IS A MIRROR IMAGE.

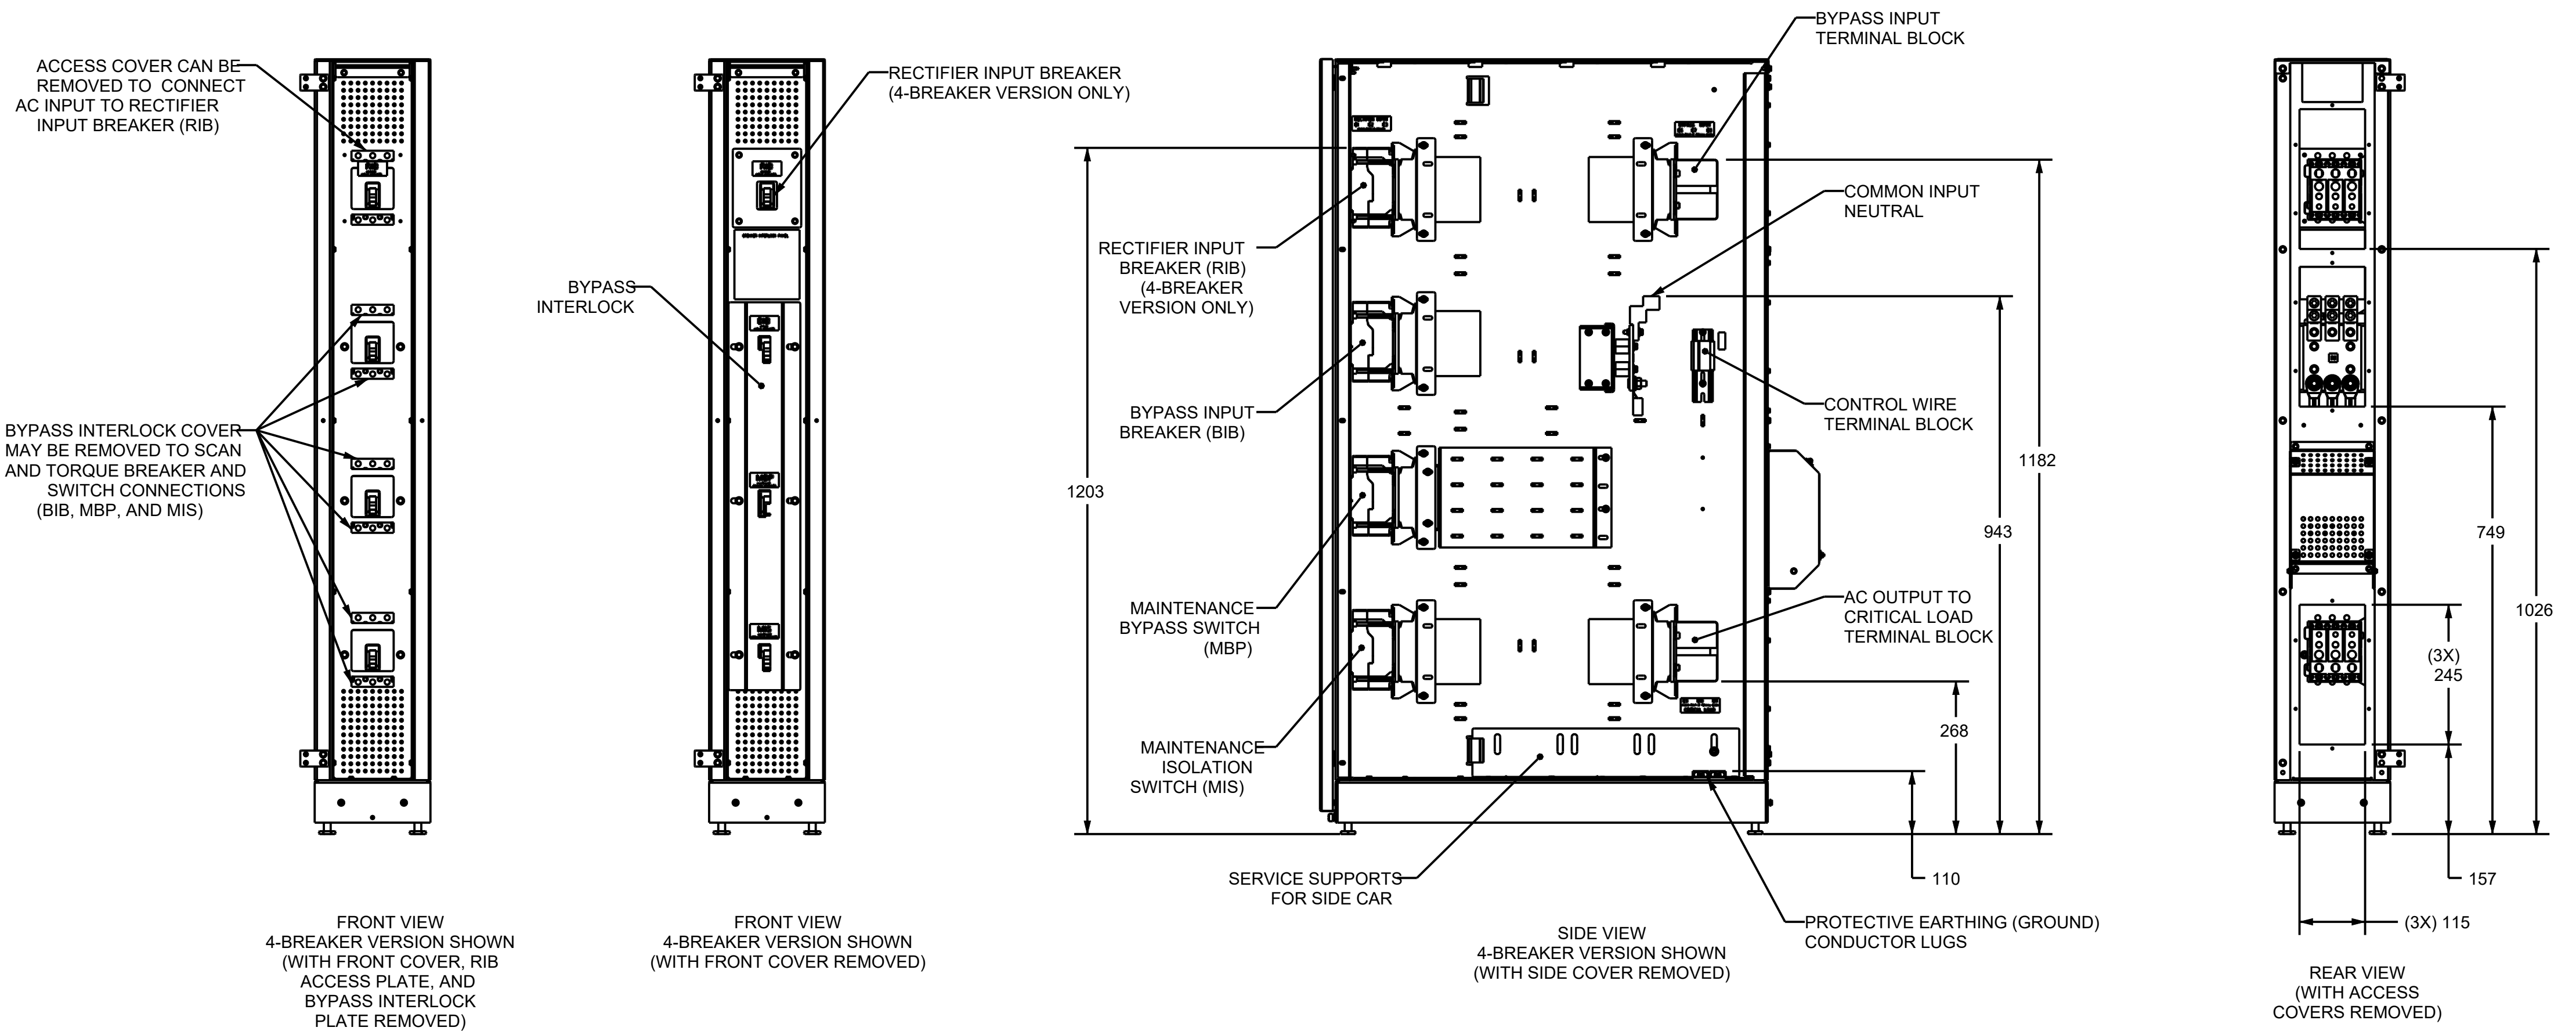

- NOTES:
- THIS PRODUCT IS TO BE USED WITH THE 93E-20, 93E-30/20, AND 93E-30/30, 9E-20, 9E-30/20, AND 9E-30/30 UPS ONLY.
 - THE RIGHT SIDE MOUNT SIDE CAR MUST BE INSTALLED ON THE RIGHT SIDE OF UPS (FACING FRONT OF UPS). THE LEFT SIDE MOUNT SIDE CAR MUST BE INSTALLED ON THE LEFT SIDE OF THE UPS.
 - THE LAYOUT SHOWN ON THIS DRAWING IS FOR A RIGHT SIDE MOUNT SIDE CAR. THE LEFT SIDE MOUNT SIDE CAR IS A MIRROR IMAGE.
 - THE SYSTEM MUST BE INSTALLED ON A LEVEL FLOOR SURFACE SUITABLE FOR COMPUTER OR ELECTRONIC EQUIPMENT.
 - THE SYSTEM MUST BE INSTALLED IN A TEMPERATURE AND HUMIDITY CONTROLLED INDOOR AREA FREE OF CONDUCTIVE CONTAMINANTS.
 - AMBIENT TEMPERATURE RANGE 0 - 30° C [32 - 86° F]: MAXIMUM RELATIVE HUMIDITY 95% NON-CONDENSING.
 - CUSTOMER WIRING MUST USE 90° C COPPER WIRE ONLY. REFER TO TABLES FOR CUSTOMER WIRING FOR WIRE SIZES.
 - SIDECAR PROVIDES A REMOVABLE BOTTOM ENTRY CONDUIT LANDING PLATE. THE TOP COVER MAY BE USED FOR TOP ENTRY CONDUIT.
 - WEIGHT AND CENTER OF GRAVITY: SEE TABLE.
 - WEIGHT OF THE CABINET DOES NOT INCLUDE CUSTOMER WIRING.
 - MINIMUM 900 MM [36 IN.] FRONT ACCESS AND 900 MM [36 IN.] REAR ACCESS NEEDED FOR SERVICING.
 - THE SIDECAR MUST BE ATTACHED TO THE UPS. THE SIDECAR CANNOT BE USED IN A STAND-ALONE CONFIGURATION.
 - SERVICE SUPPORT BRACKETS MUST BE USED WHEN THE UPS IS SEPARATED FROM THE SIDECAR FOR SERVICE. THE SUPPORT BRACKETS ARE TO BE REMOVED AND STORED IN THE CABINET AFTER THE SIDECAR IS RE-ATTACHED TO THE UPS.
 - ALL WIRING IS TO BE IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRIC CODES.
 - SOURCE INPUT TO BYPASS CABINET: 3 PHASES, NEUTRAL, GROUND.
 - OUTPUT FROM BYPASS CABINET: 3 PHASES, NEUTRAL, GROUND.
 - SPECIFICATIONS ARE SUBJECT TO CHANGE.

METRIC		THIRD ANGLE PROJECTION	EATON CORPORATION, ELECTRICAL			SIZE: D
DESCRIPTION: SITE PLAN DRAWING, 93E 30 SIAC-B						
MODIFIED BY: A.SHAH		DATE: 26-JUL-2019	UNLESS OTHERWISE SPECIFIED TOLERANCES ON DIMENSIONS ARE: ANGLES: $\pm 1/2^\circ$ DEGREES: ± 0.075 (FOR X > 3) $\pm 1/4$ HOLES: ± 0.13 OX: ± 0.04 (FOR X > 3) ± 0.25 DIMENSIONS ARE IN MILLIMETERS [INCHES] AND AFTER PLATING			SCALE: 1:10 DO NOT SCALE DRAWING OR CHANGE MANUALLY
ECO: ECO-139910		STATE: RELEASE	PRO-ENGINEER GENERATED		PART NAME: P-110000207	REVISION: 03
						SHEET: 1 OF 3
EATON CORPORATION - CONFIDENTIAL AND PROPRIETARY NOTICE TO PERSONS RECEIVING THIS DOCUMENT AND/OR TECHNICAL INFORMATION THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREON, IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION AND IS HEREBY ON LOAN AND SUBJECT TO RECALL BY EATON AT ANY TIME. BY TAKING POSSESSION OF THIS DOCUMENT, THE RECIPIENT ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BE USED IN ANY MANNER ADVERSE TO THE INTERESTS OF EATON, AND THAT NO PORTION OF THIS DOCUMENT MAY BE COPIED OR OTHERWISE REPRODUCED WITHOUT THE PRIOR WRITTEN CONSENT OF EATON. IN THE CASE OF CONFLICTING CONTRACTUAL PROVISIONS, THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT. © 2008 Eaton Corporation - All Rights Reserved.						

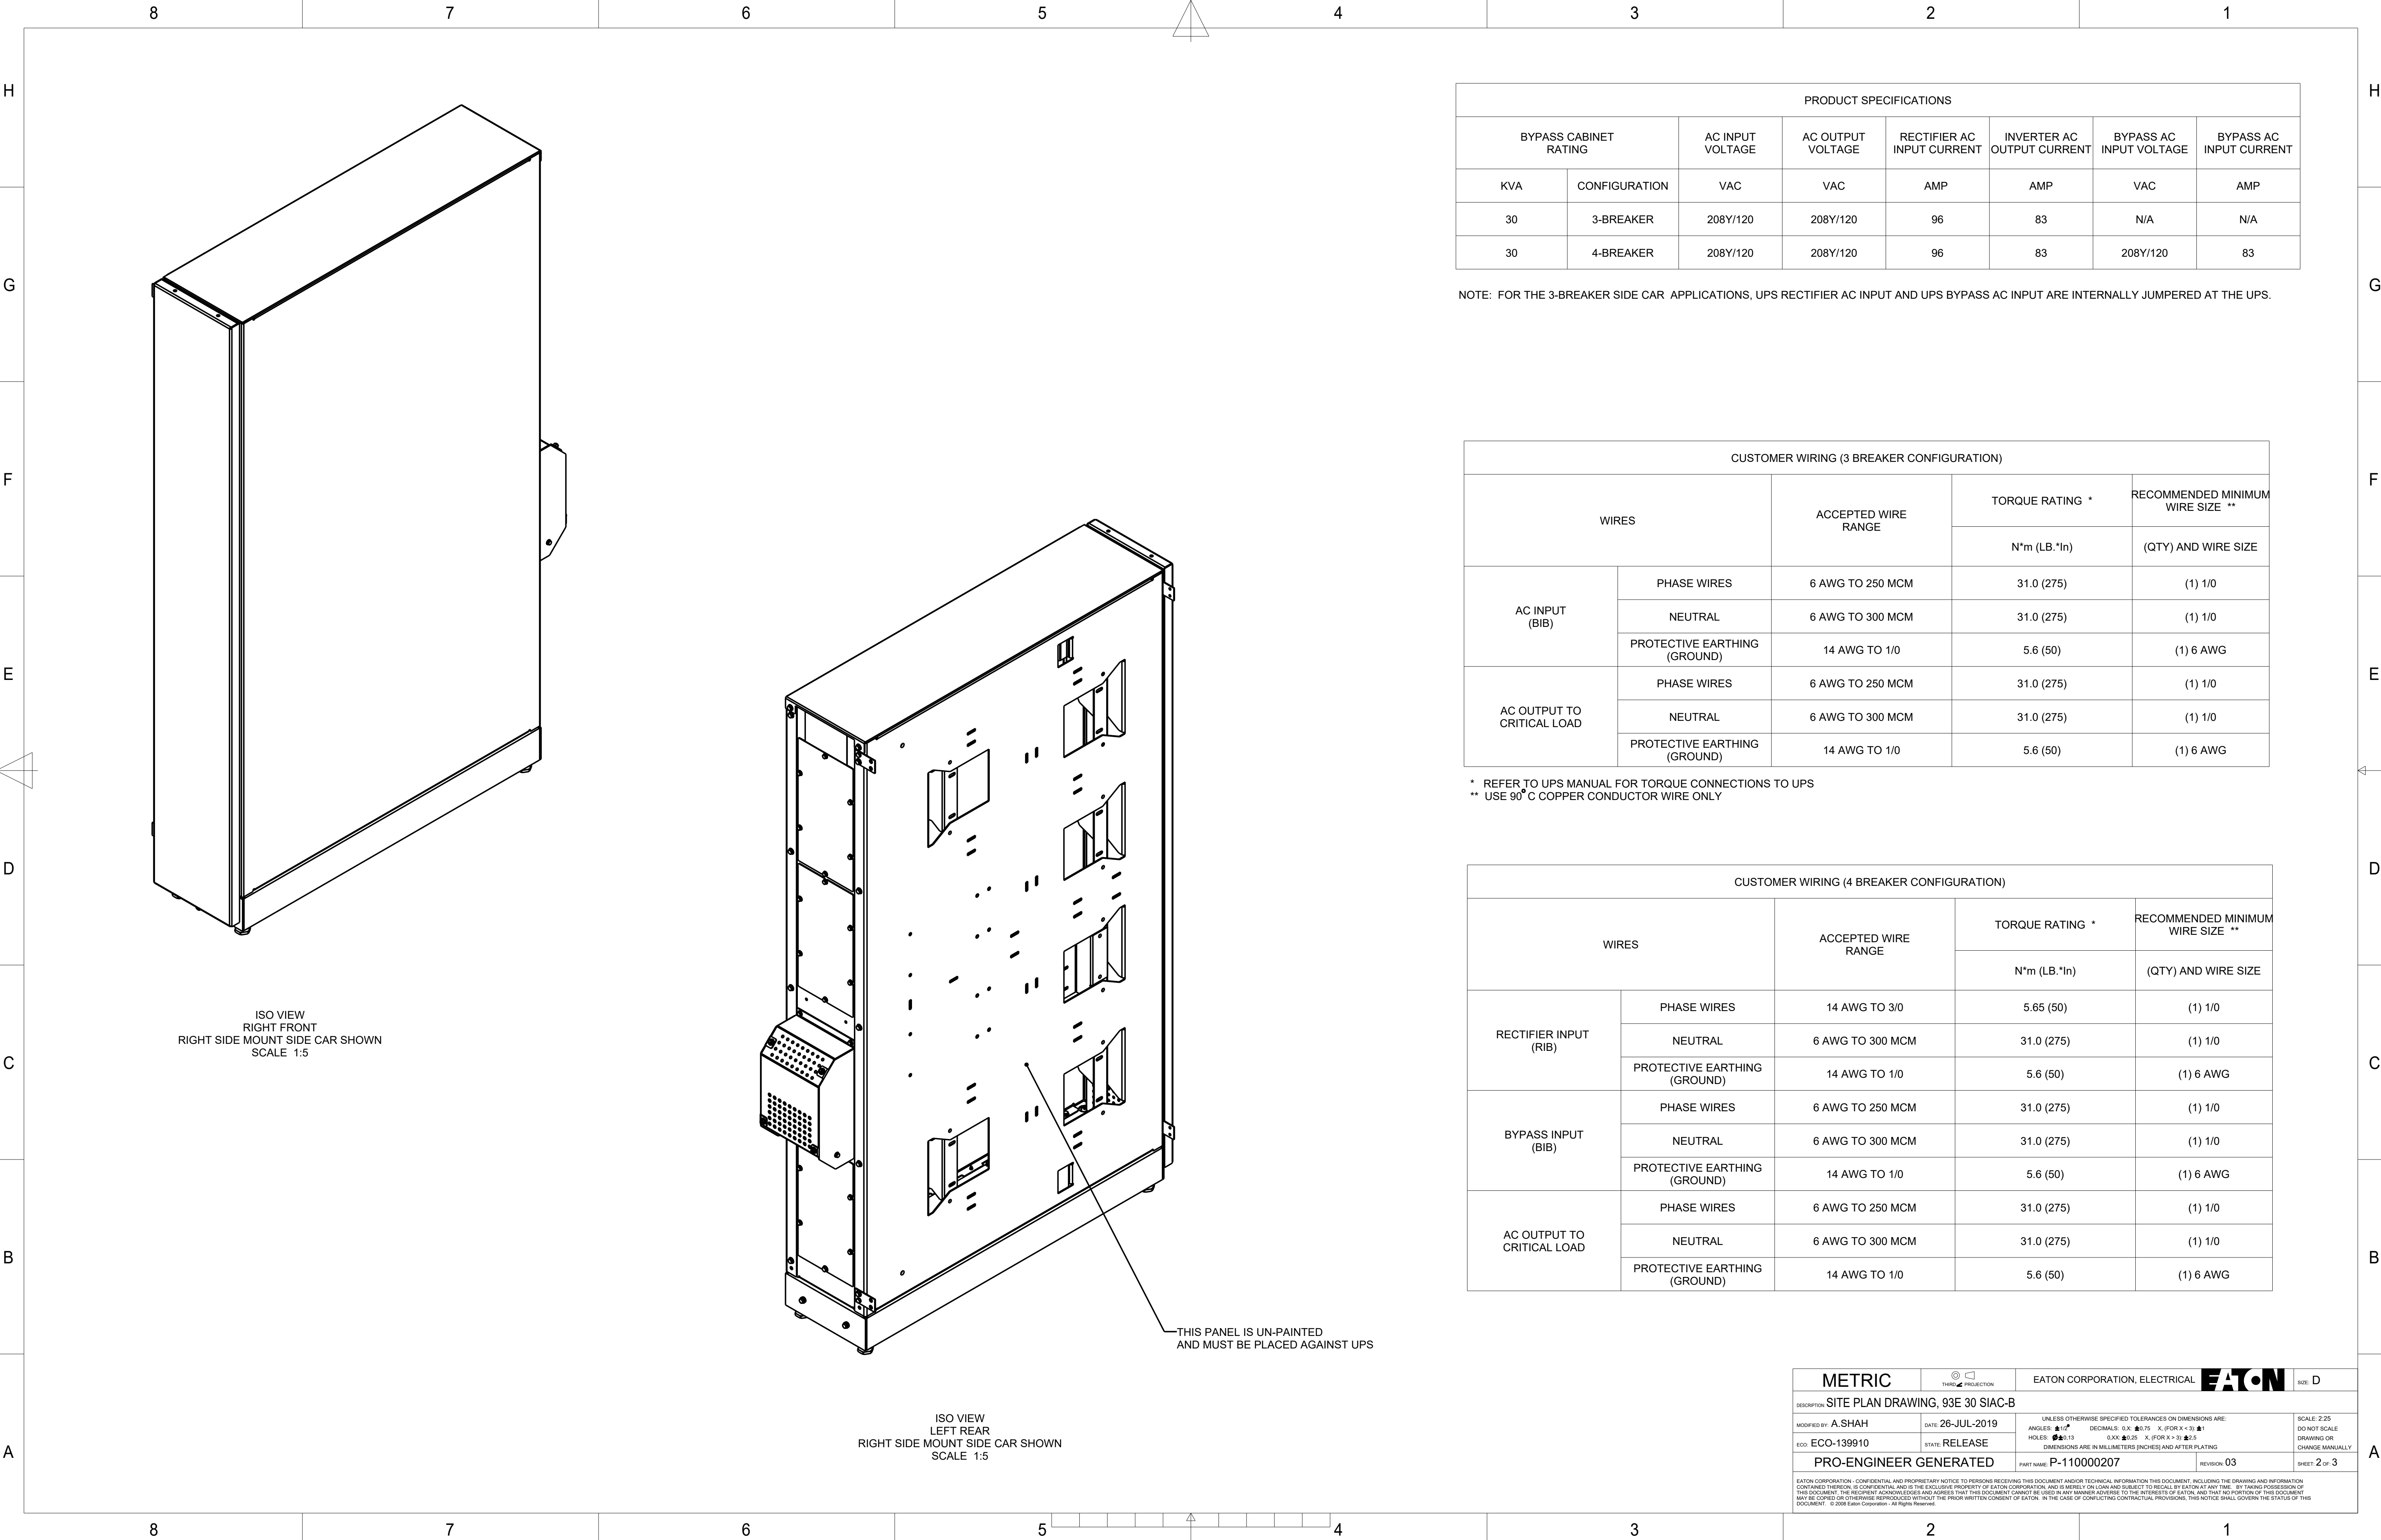

PRODUCT SPECIFICATIONS							
BYPASS CABINET RATING		AC INPUT VOLTAGE	AC OUTPUT VOLTAGE	RECTIFIER AC INPUT CURRENT	INVERTER AC OUTPUT CURRENT	BYPASS AC INPUT VOLTAGE	BYPASS AC INPUT CURRENT
KVA	CONFIGURATION	VAC	VAC	AMP	AMP	VAC	AMP
30	3-BREAKER	208Y/120	208Y/120	96	83	N/A	N/A
30	4-BREAKER	208Y/120	208Y/120	96	83	208Y/120	83

NOTE: FOR THE 3-BREAKER SIDE CAR APPLICATIONS, UPS RECTIFIER AC INPUT AND UPS BYPASS AC INPUT ARE INTERNALLY JUMPERED AT THE UPS.

CUSTOMER WIRING (3 BREAKER CONFIGURATION)				
WIRES		ACCEPTED WIRE RANGE	TORQUE RATING *	RECOMMENDED MINIMUM WIRE SIZE **
			N*m (LB.*In)	(QTY) AND WIRE SIZE
AC INPUT (BIB)	PHASE WIRES	6 AWG TO 250 MCM	31.0 (275)	(1) 1/0
	NEUTRAL	6 AWG TO 300 MCM	31.0 (275)	(1) 1/0
	PROTECTIVE EARTHING (GROUND)	14 AWG TO 1/0	5.6 (50)	(1) 6 AWG
AC OUTPUT TO CRITICAL LOAD	PHASE WIRES	6 AWG TO 250 MCM	31.0 (275)	(1) 1/0
	NEUTRAL	6 AWG TO 300 MCM	31.0 (275)	(1) 1/0
	PROTECTIVE EARTHING (GROUND)	14 AWG TO 1/0	5.6 (50)	(1) 6 AWG

* REFER TO UPS MANUAL FOR TORQUE CONNECTIONS TO UPS
** USE 90° C COPPER CONDUCTOR WIRE ONLY

CUSTOMER WIRING (4 BREAKER CONFIGURATION)				
WIRES		ACCEPTED WIRE RANGE	TORQUE RATING *	RECOMMENDED MINIMUM WIRE SIZE **
			N*m (LB.*In)	(QTY) AND WIRE SIZE
RECTIFIER INPUT (RIB)	PHASE WIRES	14 AWG TO 3/0	5.65 (50)	(1) 1/0
	NEUTRAL	6 AWG TO 300 MCM	31.0 (275)	(1) 1/0
	PROTECTIVE EARTHING (GROUND)	14 AWG TO 1/0	5.6 (50)	(1) 6 AWG
BYPASS INPUT (BIB)	PHASE WIRES	6 AWG TO 250 MCM	31.0 (275)	(1) 1/0
	NEUTRAL	6 AWG TO 300 MCM	31.0 (275)	(1) 1/0
	PROTECTIVE EARTHING (GROUND)	14 AWG TO 1/0	5.6 (50)	(1) 6 AWG
AC OUTPUT TO CRITICAL LOAD	PHASE WIRES	6 AWG TO 250 MCM	31.0 (275)	(1) 1/0
	NEUTRAL	6 AWG TO 300 MCM	31.0 (275)	(1) 1/0
	PROTECTIVE EARTHING (GROUND)	14 AWG TO 1/0	5.6 (50)	(1) 6 AWG

METRIC

THIRD ANGLE PROJECTION

EATON CORPORATION, ELECTRICAL

EATON

SIZE: D

DESCRIPTION: SITE PLAN DRAWING, 93E 30 SIAC-B

MODIFIED BY: A.SHAH

DATE: 26-JUL-2019

ECO: ECO-139910

STATE: RELEASE

UNLESS OTHERWISE SPECIFIED TOLERANCES ON DIMENSIONS ARE:
ANGLES: $\pm 1/2^\circ$
HOLE: ± 0.25 X, (FOR X > 3) ± 1
DIMENSIONS ARE IN MILLIMETERS (INCHES) AND AFTER PLATING

SCALE: 2:25

DO NOT SCALE

DRAWING OR CHANGE MANUALLY



PRO-ENGINEER GENERATED

PART NAME: P-110000207

REVISION: 03

SHEET: 2 OF 3

EATON CORPORATION - CONFIDENTIAL AND PROPRIETARY NOTICE TO PERSONS RECEIVING THIS DOCUMENT AND/OR TECHNICAL INFORMATION THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREON, IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION AND IS HEREBY ON LOAN AND SUBJECT TO RECALL BY EATON AT ANY TIME. BY TAKING POSSESSION OF THIS DOCUMENT, THE RECIPIENT ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BE USED IN ANY MANNER ADVERSE TO THE INTERESTS OF EATON AND THAT NO PORTION OF THIS DOCUMENT MAY BE COPIED OR OTHERWISE REPRODUCED WITHOUT THE PRIOR WRITTEN CONSENT OF EATON. IN THE CASE OF CONFLICTING CONTRACTUAL PROVISIONS, THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT. © 2008 Eaton Corporation - All Rights Reserved.

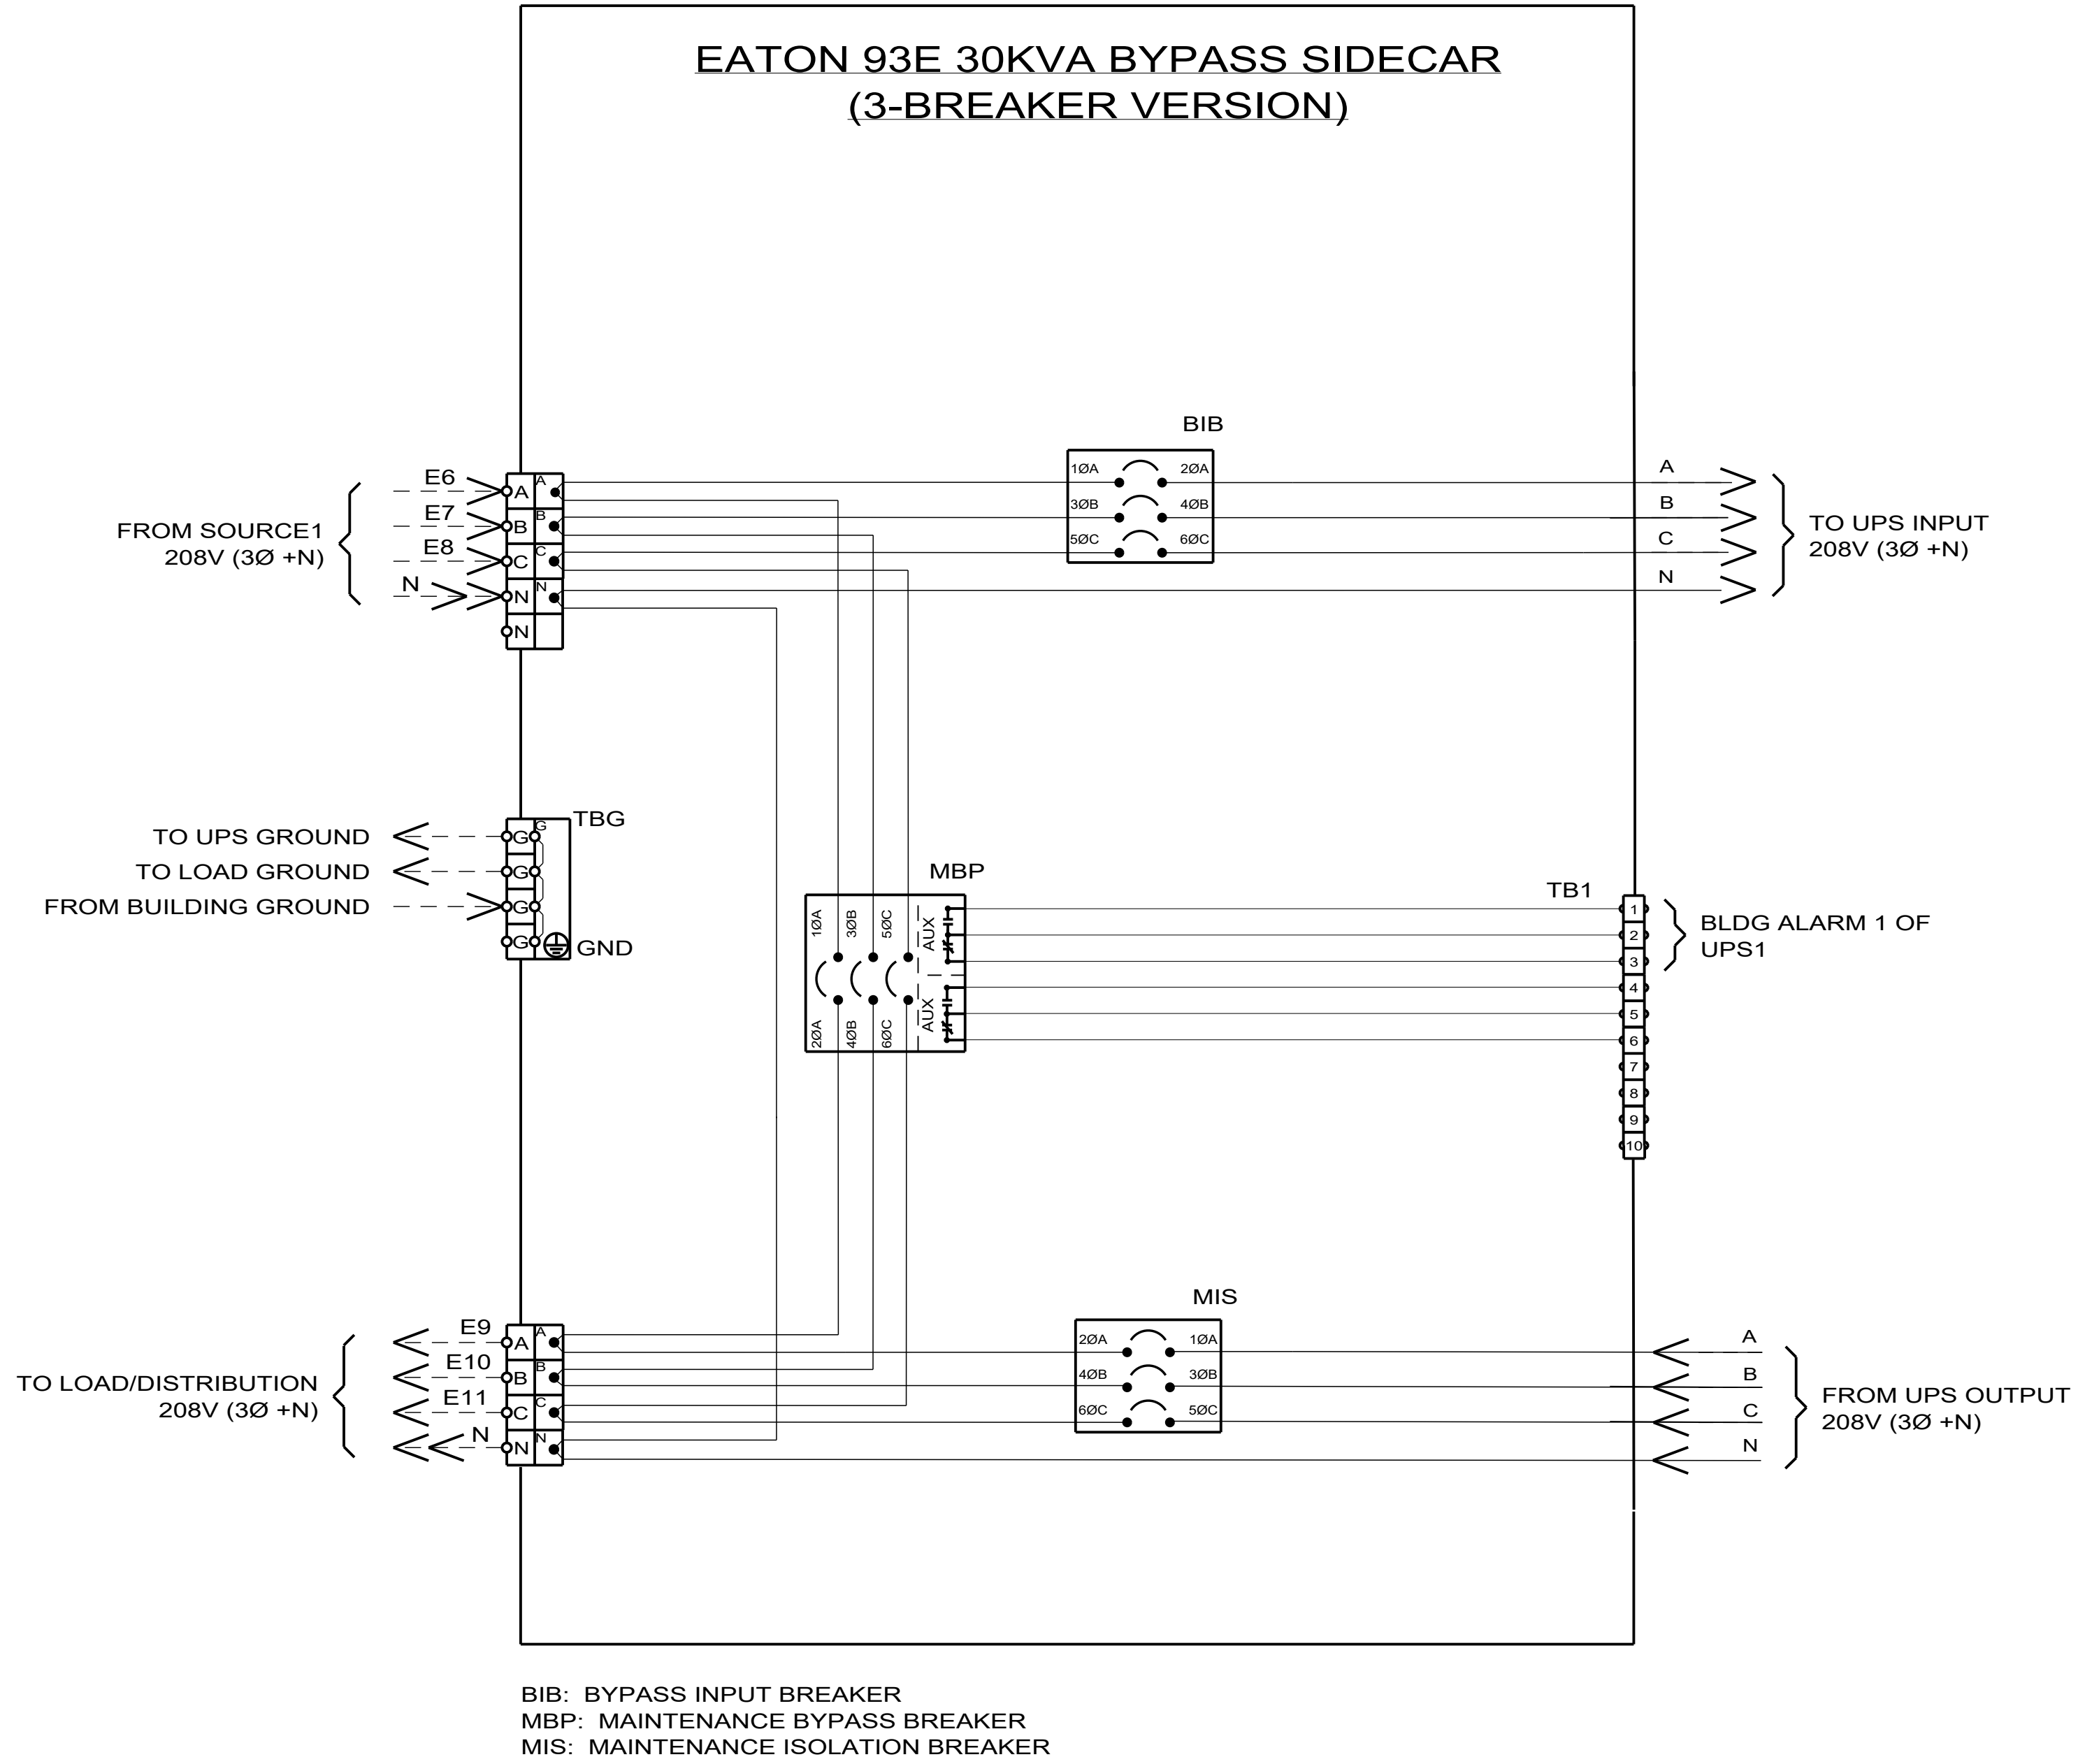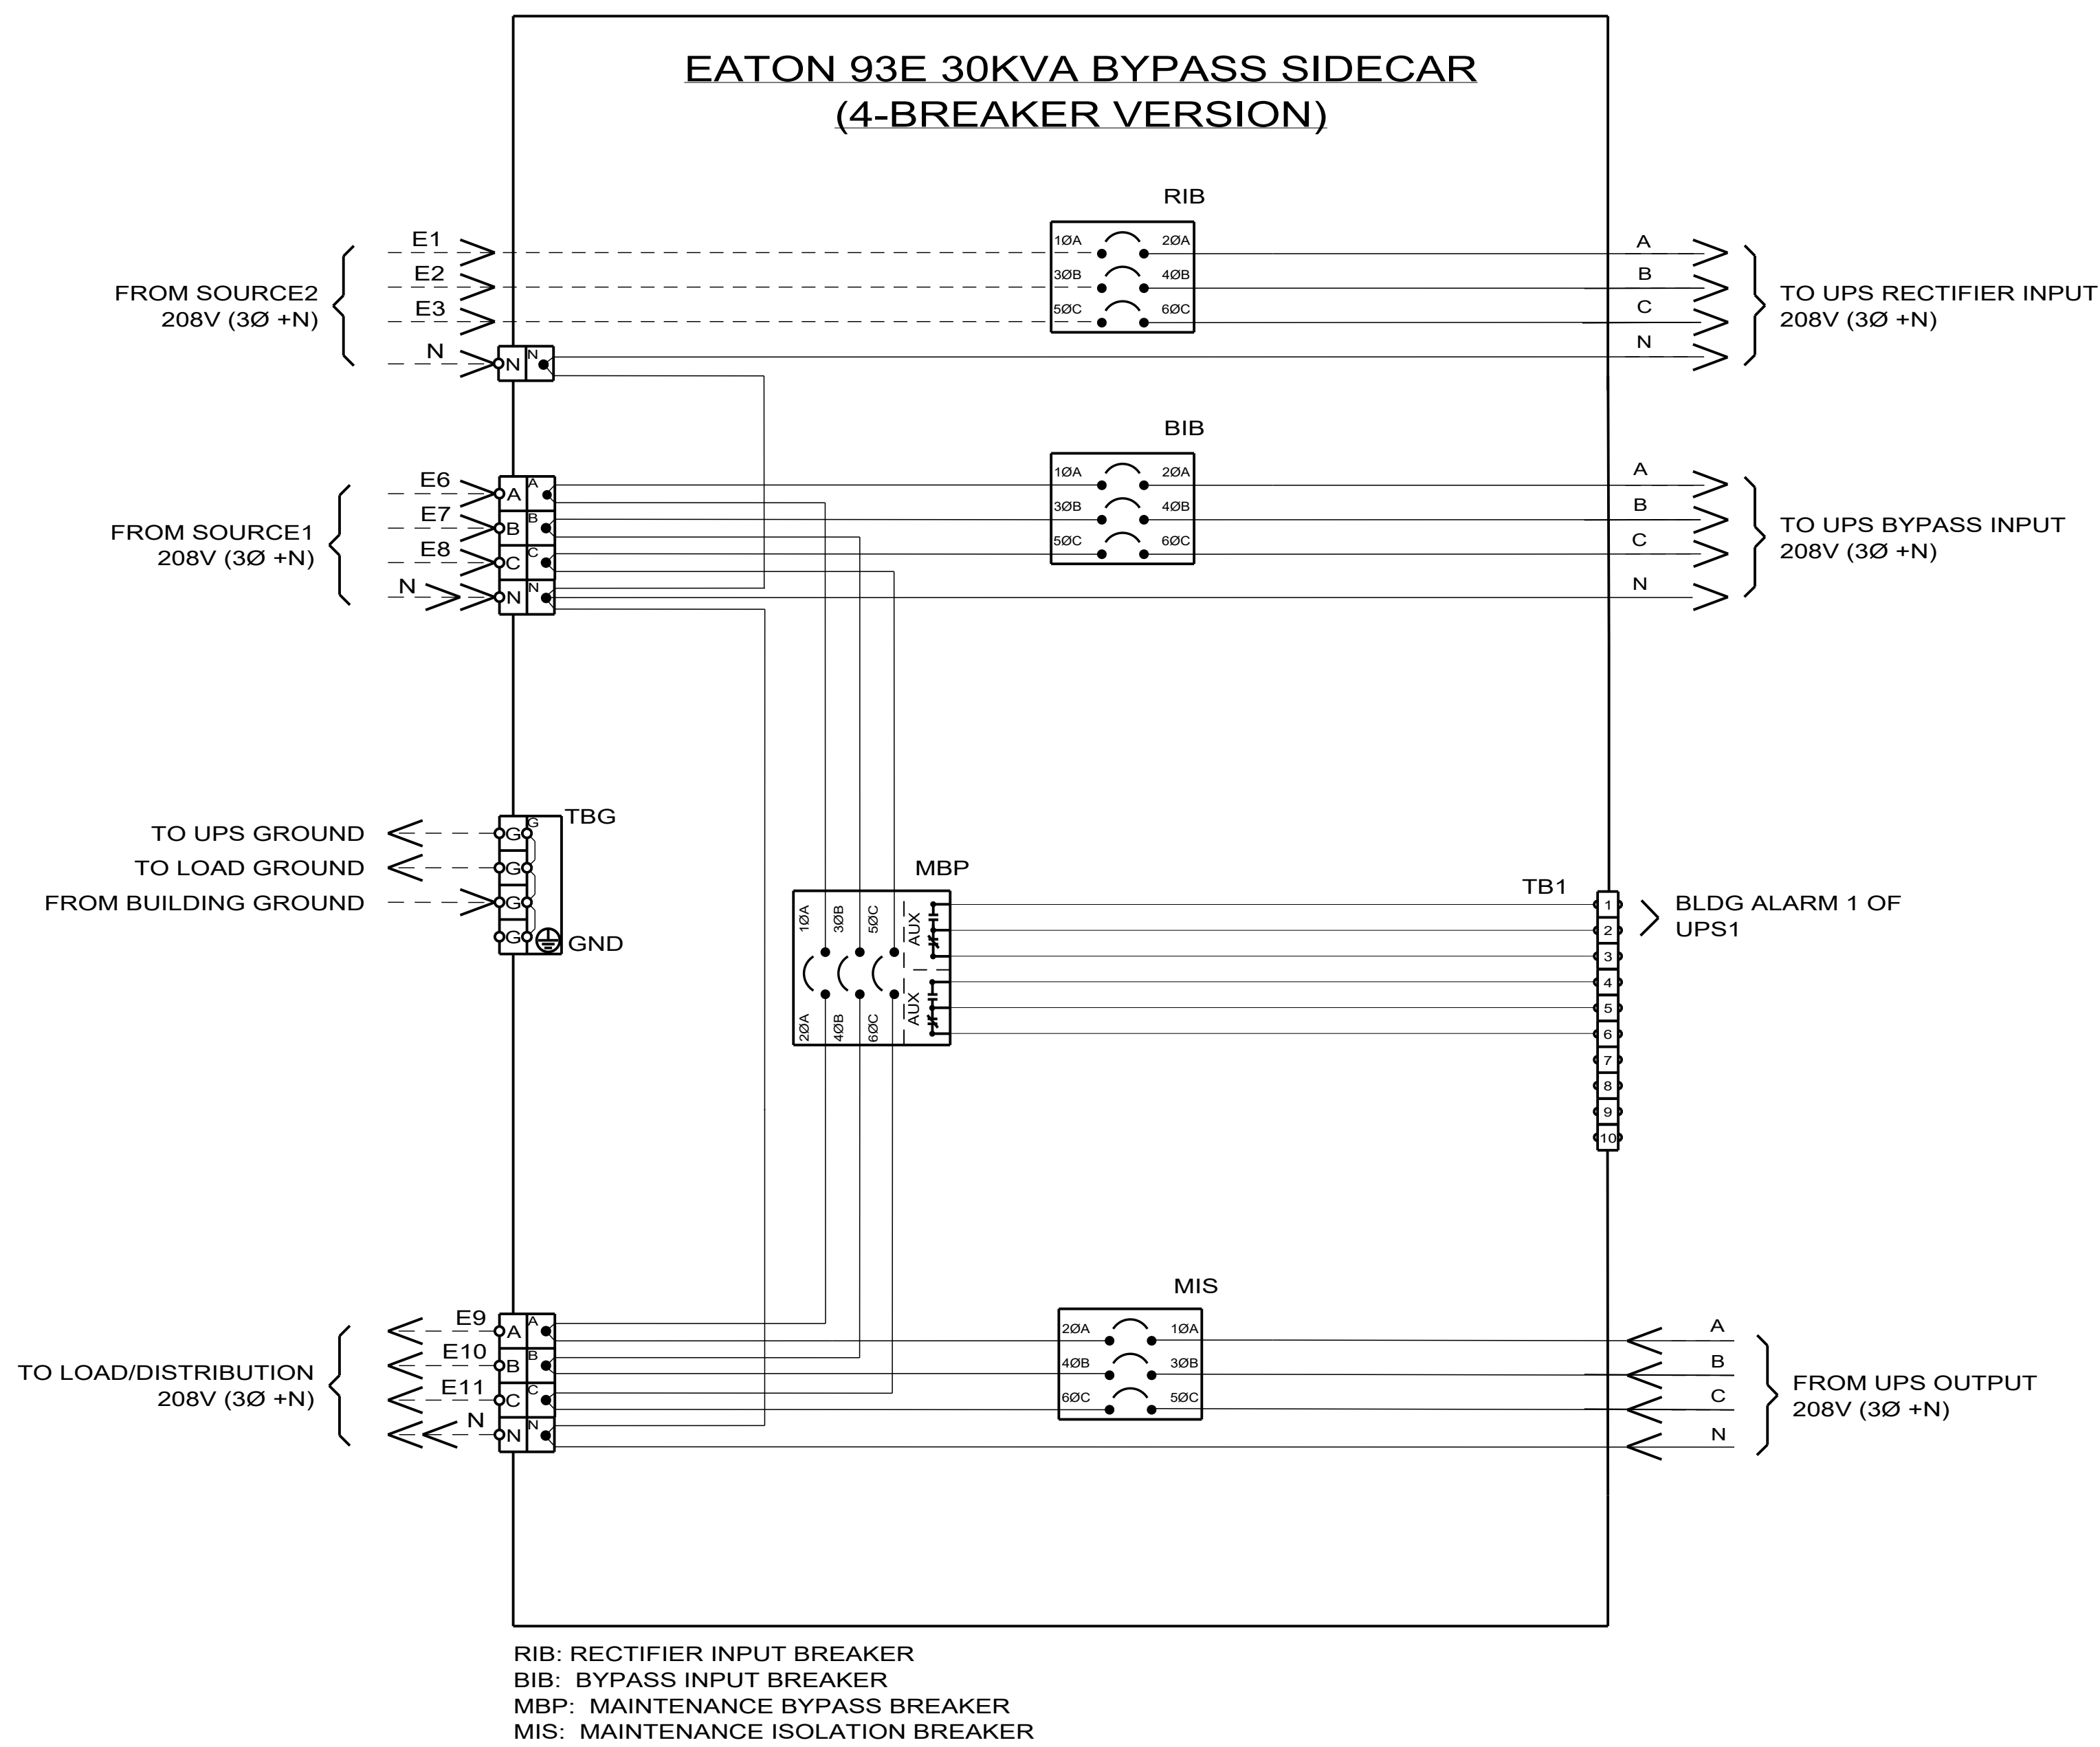

LEGEND	
FACTORY WIRING	_____
CUSTOMER WIRING	- - - - -

METRIC THIRD ANGLE PROJECTION		EATON CORPORATION, ELECTRICAL 		SIZE D
DESCRIPTION SITE PLAN DRAWING, 93E 30 SIAC-B				
MODIFIED BY: A.SHAH		DATE: 26-JUL-2019		UNLESS OTHERWISE SPECIFIED TOLERANCES ON DIMENSIONS ARE:
		ANGLES: ALL: $\pm 0.7^\circ$ DEGREES: 0.5 (FOR X > 3") ALL:		SCALE: 13:100
		Holes: ± 0.13 0.XX ± 0.5 (FOR X > 3") ± 0.25		DO NOT SCALE
E.O. EOC-139910		STATE RELEASE		DRAWING OR CHANGE MANUALLY
PRO-ENGINEER GENERATED		PART NAME: P-110000207	REVISION: 03	SHEET 3 OF 3
EATON CORPORATION, CONFIDENTIAL AND PROPRIETARY NOTICE TO PERSONS RECEIVING THIS DOCUMENT AND/OR TECHNICAL INFORMATION FROM THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREON: IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION AND IS SUBJECT TO RECALL BY EATON AT ANY TIME. BY TAKING POSSESSION OF THIS DOCUMENT, THE RECIPIENT ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BE USED IN ANY MANNER DERIVATIVE TO THE INTERESTS OF EATON, AND THAT NO PORTION OF THIS DOCUMENT IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM WITHOUT THE PRIOR WRITTEN CONSENT OF EATON. IN THE CASE OF CONFLICTING CONTRACT PROVISIONS, THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT. © 2008 Eaton Corporation - All Rights Reserved.				