

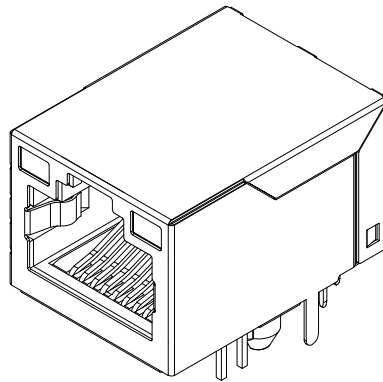
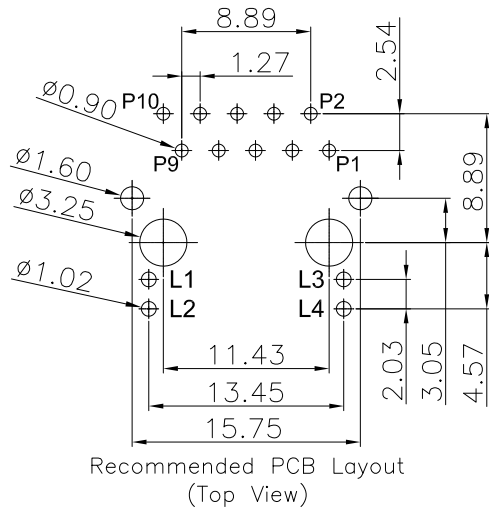
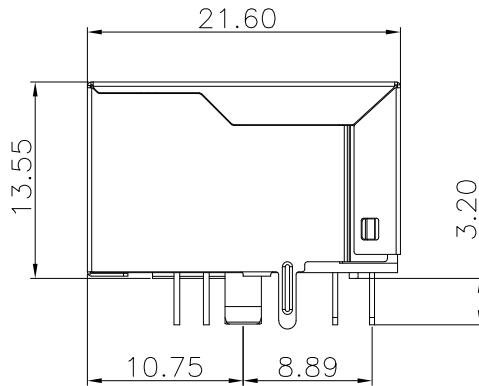


MECHANICAL:

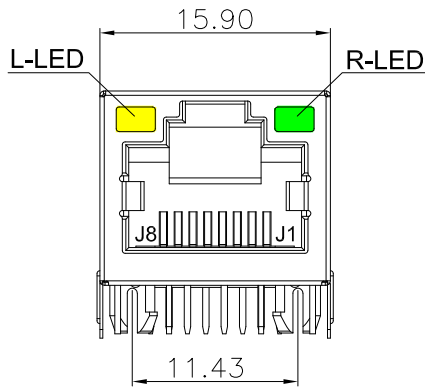

Metal Shell :Copper Alloy, Finish: 30u" Nickel
Housing :Thermoplastic,PBT,UL 94V-0,Black
Insert :Thermoplastic,PBT,UL 94V-0,Black
Contact Terminal/phosphor Bronze
6u" Gold on Contact Area, 100u" Tin on Solder,
Both over 50u" Nickel Under-Plated
Coil Base :Phenolic,PBT,UL 94V-0,Black
Terminal/Copper Alloy T=0.35mm Thickness

Meets or exceeds IEEE 802.3 standard for 10/100 Base-TX
Available with or without LEDs
Operating temperature 0°C to +70°C
Storage temperature -40°C to +85°C

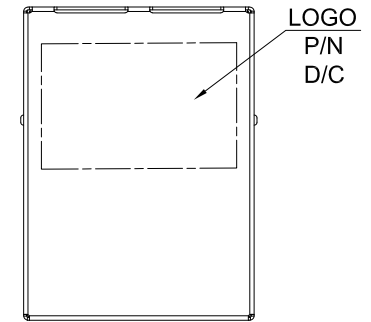

LEFT LED			RIGHT LED		
L1	L2	COLOR	L3	L4	COLOR
+	-	YELLOW	+	-	GREEN

TITLE 图 名	RJ45 Connector POE Transformer 10/100Base-TX 1x1 Port with LED	DESIGNED 设计	YUAN	SIZE A4	TOLERANCE(公差): 0.000 mm ± 0.15 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.35 mm	ZXCNT® ELECTRONICS COMPANY 深圳市朱讯电子有限公司 SHEN ZHEN ZXCNT ELECTRONICS CO.,LTD Tel: +86-0755-89885256 Http: www.zxcnt.com
		CHECKED 审核	YE	SACLE 1:1		
		DATE 日期	2017-09-02	REV A0	mm inch	
PART NO. 料 号	ZXRJ-195-32NL					

ELECTRICAL SPECIFICATIONS@25°C

1.Turn Ratio(+/-3%):1CT:1CT

2.Inductance OCL:

350uH Min @100KHz 0.1V DC BIAS 8mA

3.Insertion Loss:

-1.0dB Max @1.0-100MHz

4.Return Loss:

-20dB Min @1-30MHz

-16dB Min @30-60MHz

-12dB Min @60-80MHz

-10dB Min @80-100MHz

5.Cross talk:

-40dB Min @1-30MHz

-35dB Min @30-60MHz

-30dB Min @60-100MHz

6.Common Mode Rejection:

-30dB Min @1-100MHz


7.HIPOT TEST:

(TD+,TD-) to (TX+,TX-): 1500V ac or 2250V dc

(RD+,RD-) to (RX+,RX-): 1500V ac or 2250V dc

8.DC CURRENT /

VOLTAGE RATING - PSE PINS: 600mA MAX

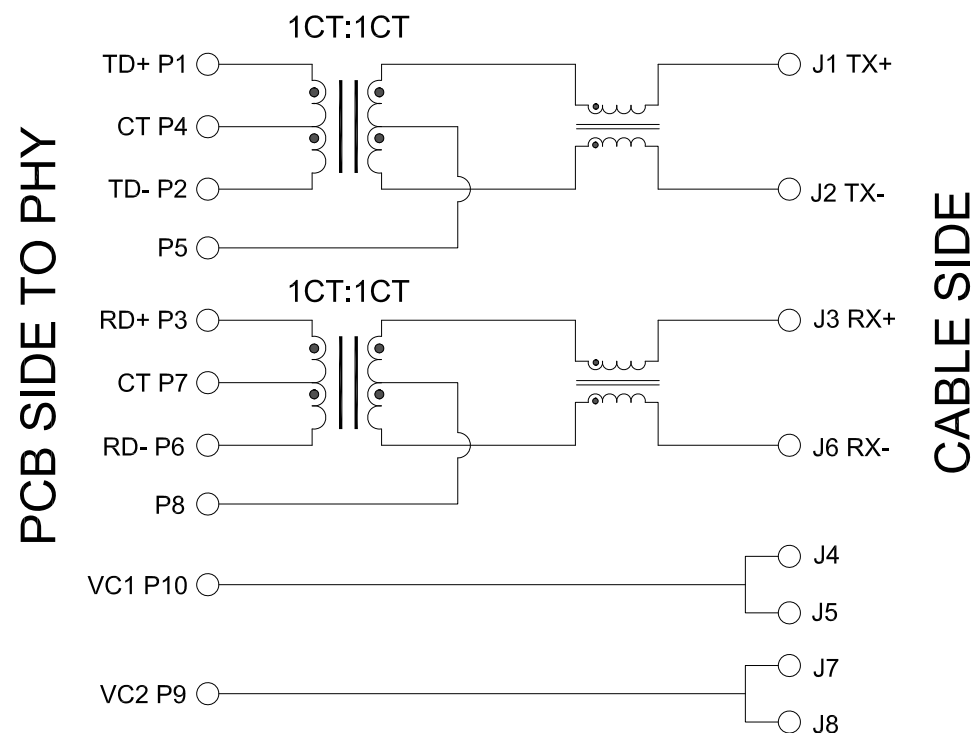

TITLE 图 名	RJ45 Connector POE Transformer 10/100Base-TX 1x1 Port with LED	DESIGNED 设计	YUAN	SIZE A4	TOLERANCE(公差): 0.000 mm ± 0.15 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.35 mm	
		CHECKED 审核	YE	SACLE 1:1		
		DATE 日期	2017-09-02	REV A0	mm inch	
PART NO. 料 号	ZXRJ-195-32NL					

ZXCNT[®]

ELECTRONICS COMPANY

深圳市朱讯电子有限公司

SHEN ZHEN ZXCNT ELECTRONICS CO.,LTD

Tel: +86-0755-89885256 Http: www.zxcnt.com