
Gear Profile/Lead


Sundram Fasteners Limited

Prog.No.:	GST0444_22 5.3.0 0 P 40 6G	Operator:	MADHAVAN	Date:	18.07.2026 12:47
Type:	INTERNAL SPLINE	No. of teeth	-44	Face Width:	5mm
Drawing No.:	68714574AA INTBROAC OD	Module m	1mm	Length Ev. La	1.24mm
Order No.:	AF.IND J01	Pressure angle	30°	Length Ev. Lß	4mm
Cust./Mach. No.:	P40	Helix angle	0°	Appr. Length M1	11.73mm
Loc. of check:	SFL	Base Cir.-Ø db	38.1051mm	Stylus-Ø	'-14(#9)0.5mm
Condition:	ID BROACHING	Base Helix angle	0°	Tooth thickness	1.781mm

DIN 5480

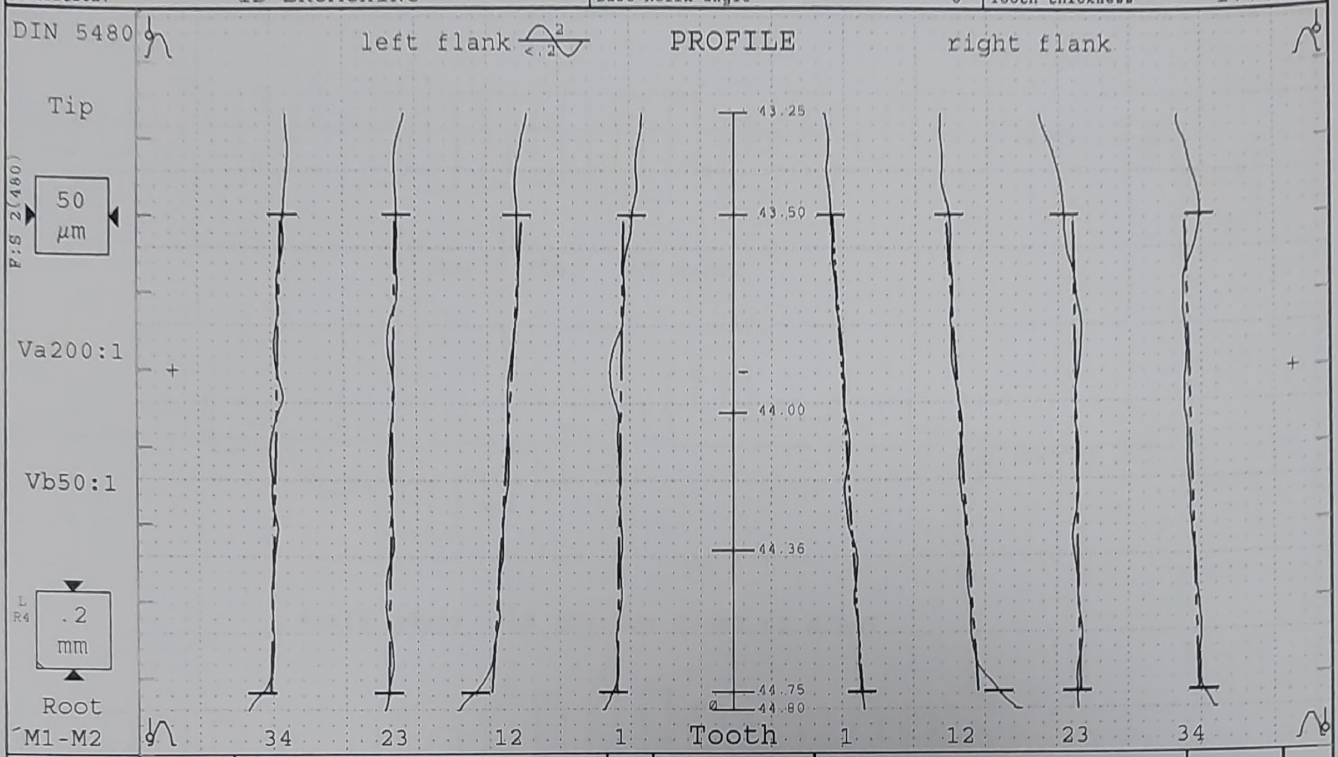

Tolerance	Avg.	Act.value[µm]				Qual	Tolerance	Act.value[µm]				Avg.	Qual
fHαm	-10.9	BIAS 17.6						BIAS 17.5				-15.9	
fHα	-10.9	-9.0	-6.7	-22.8	-5.2			-22.4	-24.3	-6.8	-10.2	-15.9	
Fα 21	18.6	16.7	9.6	**32.3**	15.8	11	21 9	**22.7**	**36.0**	14.0	14.6	**21.8**	11
ffα	11.4	10.2	7.1	14.0	14.1			6.0	17.0	11.0	14.6	12.2	
R/T-ø[mm]	45.170	[45.062/45.248]						43.096	[43.032/43.128]				

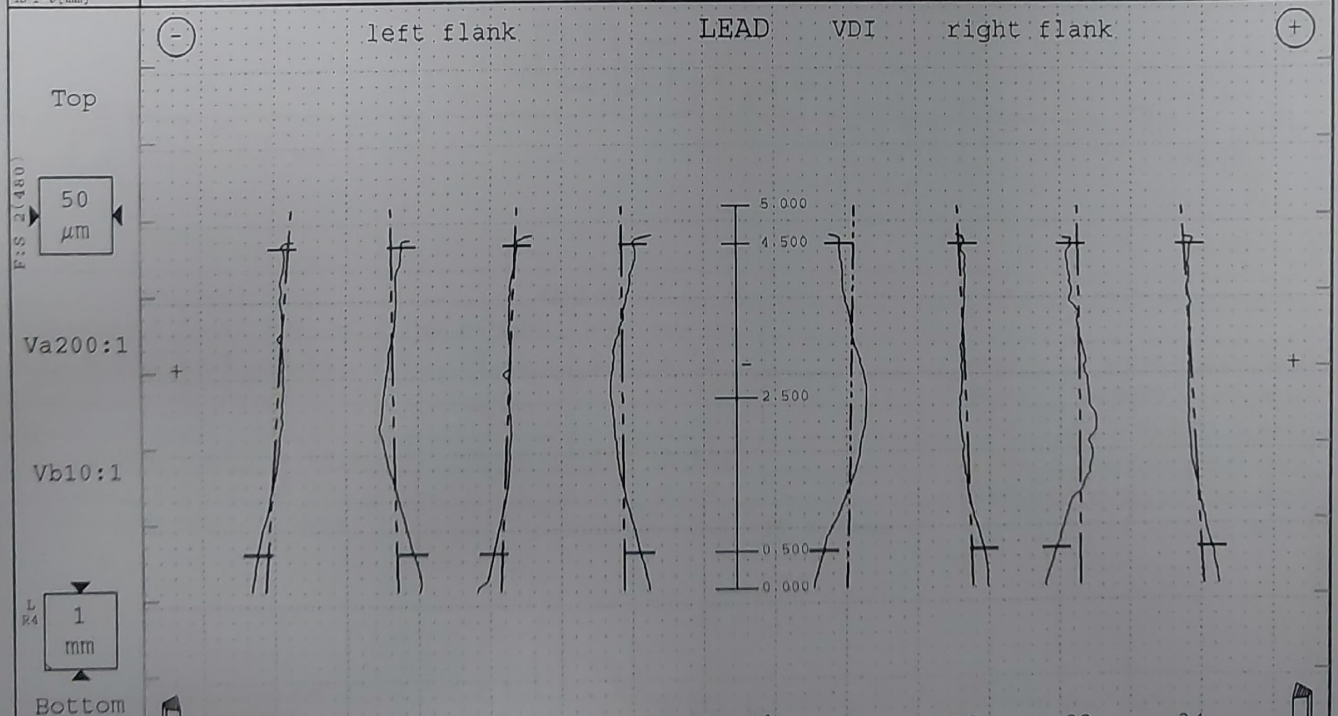

fHßm	4.3	BIAS 18.9						BIAS 18.5				-5.1	
fHß	4.3	14.6	-4.3	8.6	-1.8			4.6	-8.5	-2.5	-13.9	-5.1	
Fß 11	**19.9**	**19.1**	**23.5**	**16.0**	**21.0**	>>	11 9	**29.7**	**17.4**	**27.7**	**18.6**	**23.4**	>>
ffß	15.7	11.8	21.7	9.2	20.1			27.4	13.5	28.7	11.2	20.2	

Copyright (c) Klingelnberg GmbH KL


KLINGELNBERG

Gear Spacing


Prog.No.:	GST0444_22 5.3.0 0 P 40 6G	Operator:	MADHAVAN	Date:	18.07.2026 12:47
Type:	INTERNAL SPLINE	No. of teeth	-44	Pressure angle	30°
Drawing No.:	68714574AA INTBROAC OD	Module m	1mm	Helix angle	0°
Order No.:	AF.IND J01	Loc. of check:	SFL		
Cust./Mach. No.:	P40	Condition:	ID BROACHING		

DIN 5480 $\sqrt{<.2}^2$


Tooth to tooth spacing fp left flank

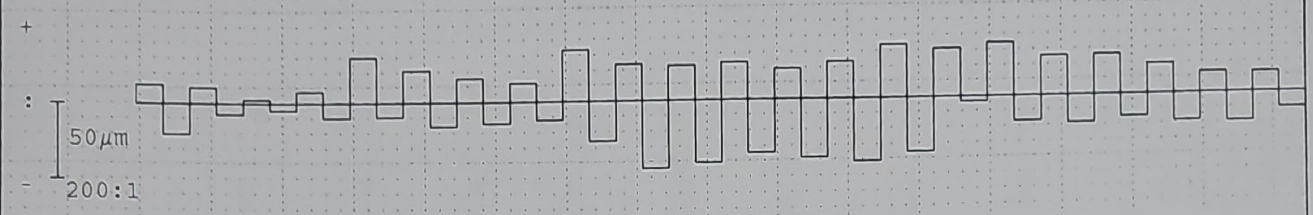


Index Fp left flank

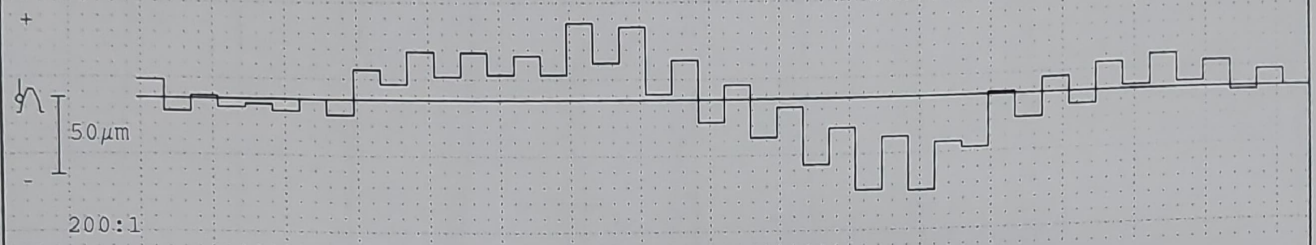

Tooth to tooth spacing fp right flank

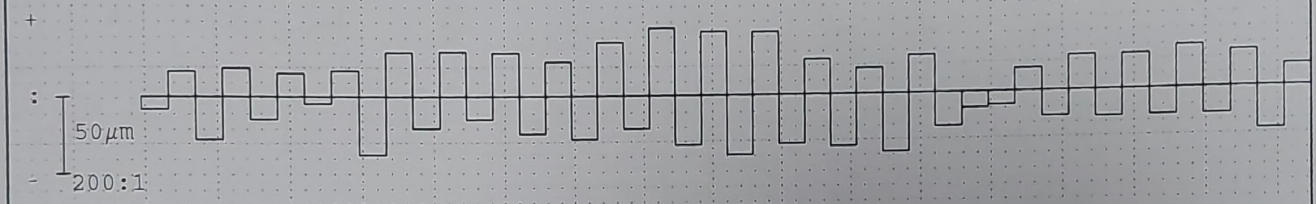

Index Fp right flank

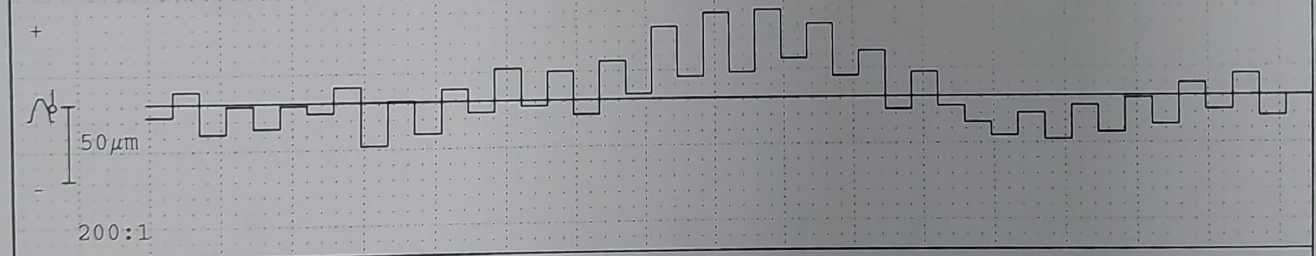


Pitch measuring circle:44 z=2.5mm		left flank				right flank			
		Act.value	Qual.	Lim.value	Qual.	Act.value	Qual.	Lim.value	Qual.
Worst pitch variation	fp max	***43.9***	12	17.0	9	***44.8***	12	17.0	9
Worst spacing variation	fu max	75.1				82.0			
Range of Pitch Error	Rp	78.6				84.7			
Total index variation	Fp	***111.2***	12	40.0	9	***87.4***	12	40.0	9
Total index var.within sector	Fpz/8	53.1				66.0			

DIN 5480

Runout Fr (Ball-Ø =2mm)

Ev[mm]: 1.756[1.741/1.771]

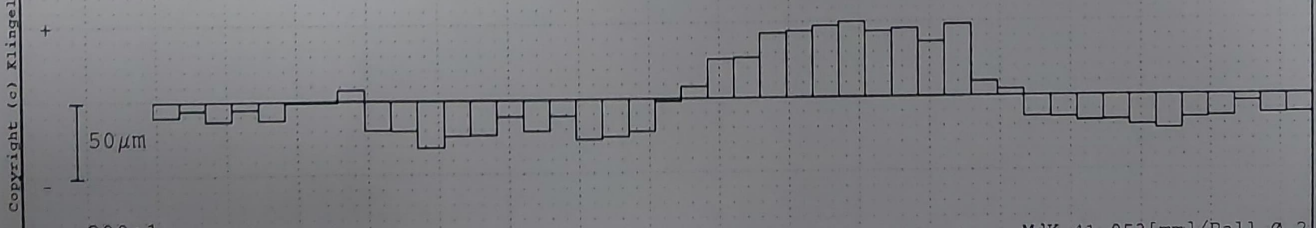

MdK 41.053[mm]/Ball-Ø 2

Pitch Line Runout	Fr	***81.7***	30.0	Lim.value	41.075	41.03	
Tooth space	enT	***1.818***	1.769/1.793	Act.	***41.122***	***41.167***	41.073

Copyright (c) Klingelnberg GmbH

KLINGELNBERG