

Passion for belting

Your partner











# Am AntiMicrobial food belts

Chiorino **HP® Antimicrobial** conveyor and process belts represent a breakthrough for food safety & hygiene.

The HP® Antimicrobial belts combine the advanced antimicrobial bacteriostatic action with the premium features of the HP® line. The bacteriostatic action prevents bacteria build-up on the belt surface by breaking the cycle of biofilm creation.

HP® Antimicrobial belts **do not contain** biocides that can migrate and contaminate the food <sup>(1)</sup>. They fully comply with **EU** and international food regulations.

HP® Antimicrobial belts help preventing product recalls due to cross contamination from the belt and minimize the risks on non-compliance during food safety inspections and audits by authorities.

(1) Migration tests are made in accordance with EU 10/2011 regulation.



### Minimize the risk of product recalls!

Food industry is continuously establishing stricter hygiene standards to prevent contaminations by microrganisms that may cause serious foodborne diseases and costly product recalls.

As the uncontrolled biofilm growth on a conveyor surface is a severe danger, Chiorino has developed a solution that minimizes this risk: the HP® AM Antimicrobial belts reduce by >99% the bacterial growth.



# Risk minimization Empower food safety





## **Enhancing food safety & hygiene**

Durable inhibition of biofilm growth

They reduce bacterial growth by >99% and inhibit the biofilm formation.

They maintain constant the antimicrobial properties during the whole lifetime.



Help preventing product recalls



Long service life



## **Preserve food quality**

No contamination from the belt

They do not contain biocides that can migrate and contaminate the food (1).

(1) Migration tests are made in accordance with EU 10/2011 regulation.



No food contamination

No alteration of food organoleptic properties



## **Product System**

Premium performances

### Excellent resistance to:

- Chemicals & sanitization agents
- High/low temperatures
- Fats and aggressive oils
- Mechanical stress caused by knife edges backflexing and scrapers.



Quick & easy to clean



Increased production efficiency



Long service life





## **Antimicrobial tests**

Measurement of antibacterial activity on plastics and other non-porous surfaces.

Test performed by external independent Laboratories.

| BACTERIA                         | Antibacterial activity <sup>1</sup><br>ufc/cm <sup>2</sup> | Reduction<br>% | Test method     |  |  |
|----------------------------------|--|----------------|-----------------|--|--|
| Staphylococcus aureus ATCC 6538P | 2,63   | 99,77%         |                 |  |  |
| Escherichia coli ATCC 8739       | 3,54   | 99,97%         | 100 0040 / 0044 |  |  |
| Salmonella enterica ATCC 70072   | 3,54   | 99,73%         | ISO 22196:2011  |  |  |
| Listeria monocytogenes CECT 5672 | 3,54   | 98,87%         |                 |  |  |

<sup>&</sup>lt;sup>1</sup> As reported by ISO22196:2011 and JAS 2801:2010 a material has an antibacterial attitude if its antibacterial activity is ≥2,00

| FUNGI                              | Antifungi action<br>rate <sup>2</sup> | Note               | Test method  |  |  |
|------------------------------------|---------------------------------------|--------------------|--------------|--|--|
| Aspergillus brasiliensis ATCC9642  | 1                                     |                    | ASTM G-21-15 |  |  |
| Talaromyces pinophilum ATCC 11797  | 1                                     | Belt remained free |              |  |  |
| Chaetomium globosum ATCC 6205      | 1                                     | of fungal growth   |              |  |  |
| Trichoderma virens ATCC9645        | 1                                     |                    |              |  |  |
| Aereobasidium pullulans ATCC 15233 | 1                                     |                    |              |  |  |

<sup>&</sup>lt;sup>2</sup> Rates values: 1=No fungal growth; 2=<10% fungal growth; 3=10-30% fungal growth; 4=30-60% fungal growth; 5=>60% fungal growth

| VIRUS  | Antiviral activity | Viral activity reduction % | Test method     |
|--|--------------------|----------------------------|-----------------|
| ATCC-CCL 1679 Orthomyxoviridae Influenza virus A<br>Influenza virus H3N2 | 0,000              | 100%                       | ISO 21702:2019  |
| ATCC VR 782 Feline calcivirus  | 0,087              | 98,56%                     | 100 217 0212017 |

# Bacterial growth & biocides migration test

Microbes have been inoculated on TPU belt covers in a petri dish. The bacterial growth has been monitored for 7 days simulating washing cycles of a belt in industrial application.

Tests performed by external indipendent Laboratory.



Standard TPU belt

X Bacterial growth on the belt's surface



Biofilm formation on belt



Competitors antimicrobial belts WITH BIOCIDES

- ✓ Bacterial growth inhibited
- Migration of biocides
- X Loss of antimicrobial efficacy due to biocides migration



Food contamination & reduced antimicrobial effect with time





- ✓ Bacterial growth inhibited
- ✓ No migration (1)
- ✓ No contamination from the belt



No biofilm, no contamination



# Supporting HACCP On field results

Chiorino HP® AM Hygienic antimicrobial belts have been successfully tested by End users adopting severe hygienic protocols.

Comparative Swab Tests have been run on HP® AM belts both during the food processing and after sanitization cycles.

HP® AM belts resulted protected from the bacterial attack, detecting counts far below the acceptable limits, remaining constant for the whole belt service life.

Customers declared that HP® AM belts fully support the HACCP procedures and facilitate cleaning operations (1).

(1) HP®AM belts do not replace the cleaning and sanification procedures.







### **Certified Food Compliance**

To protect Consumer's health, CHIORINO process and conveyor belts comply with the latest european and international Food Regulations:

**REGULATION EC 1935/2004 and amendments** 

**REGULATION EC 2023/2006 and amendments** 

**REGULATION EU 10/2011 and amendments** 

FDA (Food and Drug Administration)





### V-Label certified

Chiorino's premium food lines are compliant with the vegan food production processes, that require:

- No use of animal origin substances at any production stage
- No presence of non-vegan substances
- No presence of genetically modified organism (GMO)
- No animal testing

HP®, HP AM®, FXD® process and conveyor belts have been assessed and certified as meeting the requirements of the V-Label Criteria for Vegan Products, Version 1, 07.11.2019, for the products certified and licensed by V-Label.



# **Antimicrobial belts**

# **Production program**


| Code   | Туре                        | Material    | Colour     | Surface | Total<br>thickness | Knife edge<br>min.<br>radius <sup>(1)</sup> | Min.<br>pulley<br>diameter (1) | Pull<br>for 1%<br>elongation | Temperature resistance °C |      |
|--------|-----------------------------|-------------|------------|---------|--------------------|---|--------------------------------|------------------------------|---------------------------|------|
| /-/-   |                             |             |            |         | mm                 | mm  | mm                             | N/mm                         | min.                      | max. |
| NA1669 | EL2- U10 HP blue AM         | HP® TPU     | blue       | smooth  | 1.00               | -   | 10                             | 2 (2)                        | -30                       | 60   |
| NA1688 | EL3-U15 HP blue AM          | HP® TPU     | blue       | smooth  | 1.50               | -   | 10                             | 3 (2)                        | -30                       | 60   |
| NA1758 | EL3-U15 HP PN blue AM       | HP® TPU     | blue       | PN      | 1.50               | -   | 10                             | 3 (2)                        | -30                       | 60   |
| NA1667 | 1M5 U0-U2 HP blue A AM      | HP® TPU     | blue       | smooth  | 0.70               | 3   | 6                              | 5                            | -30                       | 110  |
| NA1665 | 1M5 U0-U2 HP VL blue A AM   | HP® TPU     | blue       | VL      | 0.70               | 3   | 6                              | 5                            | -30                       | 110  |
| NA1717 | 1DM8 U0-U2 HP W A AM        | HP® TPU     | white      | smooth  | 1.35               | 4   | 8                              | 8                            | -30                       | 110  |
| NA1738 | 1M5 U3-U3 HP FL/FM W AM     | HP® TPU     | white      | FM      | 1.40               | -   | 10                             | 5                            | -30                       | 110  |
| NA1747 | 2M5 U0-U0 HP A AM           | HP® TPU (3) | white      | fabric  | 1.00               | 4   | 8                              | 6                            | -30                       | 110  |
| NA1760 | 2M5 U0-U0 HP blue A AM      | HP® TPU (3) | light blue | fabric  | 1.00               | 4   | 8                              | 6                            | -30                       | 110  |
| NA1748 | 2M5 U0-U2 HP W S A AM       | HP® TPU     | white      | smooth  | 1.30               | 4   | 8                              | 6                            | -30                       | 110  |
| NA1766 | 2M5 U0-U2 HP blue S A AM    | HP® TPU     | blue       | smooth  | 1.30               | 4   | 8                              | 6                            | -30                       | 110  |
| NA1775 | 2M5 U0-U2 HP W AM           | HP® TPU     | white      | smooth  | 1.30               | 4   | 8                              | 6                            | -30                       | 110  |
| NA1770 | 2M5 U0-U2 HP W A AM         | HP® TPU     | white      | smooth  | 1.30               | 4   | 8                              | 6                            | -30                       | 110  |
| NA1668 | 2M5 U0-U2 HP blue A AM      | HP® TPU     | blue       | smooth  | 1.30               | 4   | 8                              | 6                            | -30                       | 110  |
| NA1666 | 2M5 U0-U2 HP VL blue A AM   | HP® TPU     | blue       | VL      | 1.30               | 4   | 8                              | 6                            | -30                       | 110  |
| NA1761 | 2M5 U2-U2 HP PN blue AM     | HP® TPU     | blue       | PN      | 1.85               | -   | 15                             | 6                            | -30                       | 110  |
| NA1722 | 2M5 U0-U3 HP EN blue A AM   | HP® TPU     | blue       | EN      | 1.60               | 4   | 8                              | 6                            | -30                       | 110  |
| NA1759 | 2M5 U0-U8 HP CC blue AM     | HP® TPU     | blue       | СС      | 2.90               | -   | 10                             | 6                            | -30                       | 110  |
| NA1756 | 2M5 U0-U8 HP STL blue A AM  | HP® TPU     | blue       | STL     | 2.40               | -   | 10                             | 6                            | -30                       | 110  |
| NA1737 | 2M5 U3-U15 HP FM/ST blue AM | HP® TPU     | blue       | ST      | 4.00               | -   | 60                             | 6                            | -30                       | 110  |

<sup>(1)</sup> Minimum radius / pulley diameter is dependent on the joint recommended by Chiorino.

The technical data are valid under normal environmental conditions and are subject to change without notice.

Due to the variety of different worldwide regulations, the information in this catalogue are valid for Europe. For other geographical areas please contact our Sales Departments.

### **Textures**

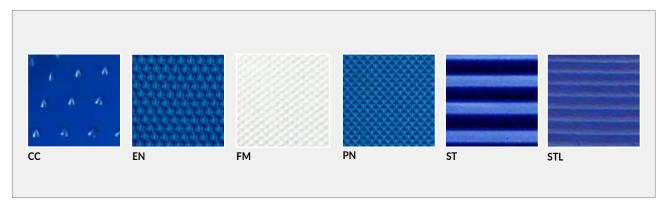

<sup>(2)</sup> Elastic belts: pull for 8% elongation.

<sup>(3)</sup> Fabric with HP® TPU impregnation.



# X-Ray & Metal detectable version





## Prevent foreign material contamination Increase food safety & hygiene

Where Foreign Material Contamination is a dangerous concern, Chiorino  $FXD^{\text{TM}}$  is the solution to minimize risk and to prevent costly products recalls. Chiorino  $FXD^{\text{TM}}$  is the only range of food grade belts detectable by both X-Rays and Metal detectors.

Chiorino FXD<sup>™</sup> belts installed on production lines equipped with both X-ray & Metal detectors reduce significantly the risk of Foreign Material Contamination originating accidentally from the belt, thus avoiding potential hazard to the consumer.

Chiorino **FXD**<sup>™</sup> **AM** belts combine the **dual detectability** features of **FXD**<sup>™</sup> belts with the **antimicrobial bacteriostatic** action of the Chiorino **AM** line.

The result is the ultimate food safety belt.



**Dual detectability** X-Ray & Metal detectors



Durable inhibition of biofilm growth EC 1935/2004 & FDA food compliance



Preserve food quality
No contamination from the belt









### **HEADQUARTERS AND PRODUCTION PLANTS**

### CHIORINO S.p.A.

Via S. Agata, 9 I-13900 Biella, Italy Tel. +39 015 8489 1 Fax +39 015 8489 161 chiorino@chiorino.com www.chiorino.com







#### **CHIORINO AFFILIATED COMPANIES**

#### America

CHIORINO AMERICA Suwanee, GA Tel. +1-302-292-1906 info@chiorino.us www.chiorino.us

SAFARI BELTING SYSTEMS, Inc. Olathe, KS Tel. +1-888-662-6611 info@safaribelting.com www.safaribelting.com

#### Australia

CHIORINO AUSTRALIA Brisbane Tel. +61-7-32741900 sales@chiorino.com.au www.chiorino.com.au

#### Renelin

CHIORINO BENELUX B.V. Utrecht - Netherlands Tel. +31-30-2413060 chiorino@chiorino.nl www.chiorino.nl

#### China

CHIORINO ASIA Ltd. Hong Kong Tel. +852-397-10818 info@chiorino.asia www.chiorino.asia

#### Czech Republic

REKO s.r.o. Jaromer Tel. +420-491-840012 info@reko-sro.cz www.reko-sro.cz

#### France

CHIORINO SAS - Lagny, Paris Tel. +33-1-64304075 chiorino.paris@chiorino.fr www.chiorino.fr

#### Germany

CHIORINO GmbH - Mainz Tel. +49-(0)6131-55449-0 info@chiorino.de www.chiorino.de

#### Hungary

CHIORINO Kft. Szigetszentmiklós, Budapest Tel. +36-24-525930 mail@chiorino.hu www.chiorino.hu

#### India

FRANSTEK PRIVATE Ltd. (JV) Salcete Goa Tel. +918-322-782454 info@chiorino.in

#### Italy

CHIORINO PARMA s.r.l. Parma Tel. +39-0521-292236 chiorinoparma@chiorino.com

CHIORINO VENETO s.r.l. Colle Umberto (TV) Tel. +39-0438-430460 chiorinoveneto@chiorino.com

KRUSE srl - Torino Tel. +39-011-2236878 info@kruseonline.com

#### Poland

CHIORINO Sp. z o.o. - Bydgoszcz Tel. +48-(0)52-3487708 chiorino@chiorino.com.pl www.chiorino.com.pl

#### Portugal

CHIORINO PORTUGAL, LDA Alfena Valongo, Porto Tel. +351-229684442 geral@chiorino.pt www.chiorino.pt

#### Romania

CHIORINO srl Sannicoara, Jud.Cluj Napoca Tel. +40-264-432977 chiorino@chiorino.ro www.chiorino.ro

#### Slovakia

CHIORINO SLOVAKIA s.r.o. Nové Zámky Tel. +421-910-486654 info@chiorino.sk www.chiorino.sk

#### South Africa

CHIORINO SOUTH AFRICA Ltd. Johannesburg Tel. +27-11-3971268 sales@chiorino.co.za www.chiorino.com

#### Spain

CHIORINO IBERICA S.A. Rubí, Barcelona Tel. +34-93-5860480 chiorino@chiorino.es www.chiorino.es

#### Switzerland

CHIORINO SCHWEIZ GmbH Wetzikon Tel. +41-(0)43-3116001 info@chiorino.ch www.chiorino.ch

#### Ukraine

CHIORINO UKRAINE LLC Poltava region, Shcherbani village Tel. +38-050806560 office@chiorino.com.ua chiorino.com.ua

#### **United Kingdom**

CHIORINO U.K. Ltd. Glasshoughton Tel. +44-1977-691880 sales@chiorino.co.uk www.chiorino.co.uk

Chiorino operates all over the world through the Group companies and more than 100 distributors. More info on www.chiorino.com

