

Two pointers :

ptrc → current state
ptrn → next free mem. loc.

Stage reg = 1 initially.

Local reg for ACS unit
→ size: 2x8-bit

Start = 1
End = 0

Initialize

00h → 0000 → 01
01h → 0000 → 11
02h → 0000 → 0000
03h → 1111 1111
Path metric
ptrc initially
initial state
next state
current state


Determine the next states for the bits set in current state; Set bits in next state

→ Hard decision for determining the next state and store state no. in next next locations along with current state addr. Determine branch metric and add to path metric

One-by-one for each next state. (update ptrc)

Current state ← next state
next state ← 0000
stage reg := increment

Update ptrc

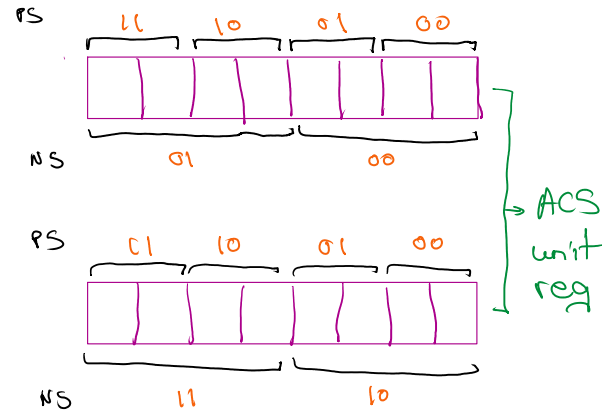

Stage == 3?

No

Yes

Start from '00' state, calculate branch metric and store the value in the res. reg. Do for '01', '10' & '11' states also

Start from '00' state, compare, select and store '00' along with correct PS. Repeat for remaining NS.

Update ptrc for correct PS.

No

End == 1?

Yes

