


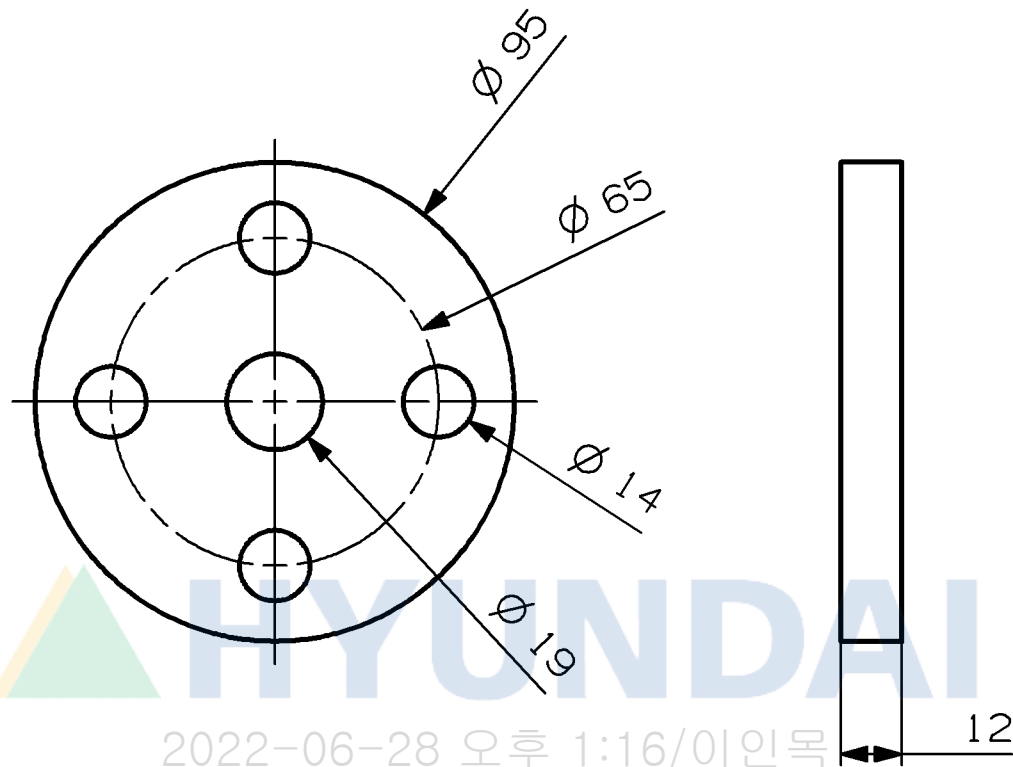

| Date       | Designed | Checked | Approved | Action code | Exchangeability | Change / Replacement | ECN No. | Rev |
|------------|----------|---------|----------|-------------|-----------------|----------------------|---------|-----|
| 2021-12-01 | CDH      | LHT     | ZHS      |             |                 |                      |         | 0   |

|                       |  |                        |  |                          |                  |              |
|-----------------------|--|------------------------|--|--------------------------|------------------|--------------|
| Similar Drawing No.   |  | Licensor's Drawing No. |  | LIC. Material / Blank    | Material / Blank | Mass(kg)     |
| Previous Drawing No.  |  | Supplement Drawing No. |  | SUS316L                  |                  |              |
| Engine / Product Type |  | Title                  |  | Projection               | Units            | Distribution |
|                       |  | FLANGE                 |  | 1:1                      | mm kg            | P82          |
| Description           |  | Drawing No.            |  | Scale                    | Information No.  | Security     |
|                       |  | A14-791519-6           |  | 1:1                      |                  | B            |
| Page No.              |  | Size                   |  | HYUNDAI HEAVY INDUSTRIES |                  |              |
| 01/01                 |  | A4                     |  |                          |                  |              |

| Tolerances for dimensions without tolerance indication (ISO 2768-1988)                                                                                |                     |                 |                   |                    |                     |                      |     |     |     |      |     |     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------|-------------------|--------------------|---------------------|----------------------|-----|-----|-----|------|-----|-----|
| This standard states the permissible deviations for dimensions without direct tolerance indications on metallic components manufactured by machining. |                     |                 |                   |                    |                     |                      |     |     |     |      |     |     |
| Permissible deviation                                                                                                                                 | Basic size range mm |                 |                   |                    |                     |                      |     |     |     |      |     |     |
|                                                                                                                                                       | 0.5 up to 6         | over 6 up to 30 | over 30 up to 120 | over 120 up to 365 | over 365 up to 1000 | over 1000 up to 2000 |     |     |     |      |     |     |
| Medium series                                                                                                                                         | ±0.1                | ±0.2            | ±0.3              | ±0.5               | ±0.8                | ±1.2                 |     |     |     |      |     |     |
| Standard for surface roughness                                                                                                                        |                     |                 |                   |                    |                     |                      |     |     |     |      |     |     |
| The basic symbolic and class number are in according with ISO 1302-1978                                                                               |                     |                 |                   |                    |                     |                      |     |     |     |      |     |     |
| Class No.                                                                                                                                             | H1                  | H2              | H3                | H4                 | H5                  | H6                   | H7  | H8  | H9  | H10  | H11 | H12 |
| Ra max. μ                                                                                                                                             | 0.05                | 0.05            | 0.1               | 0.2                | 0.4                 | 0.8                  | 1.6 | 3.2 | 6.3 | 12.5 | 25  | 50  |