


2-5

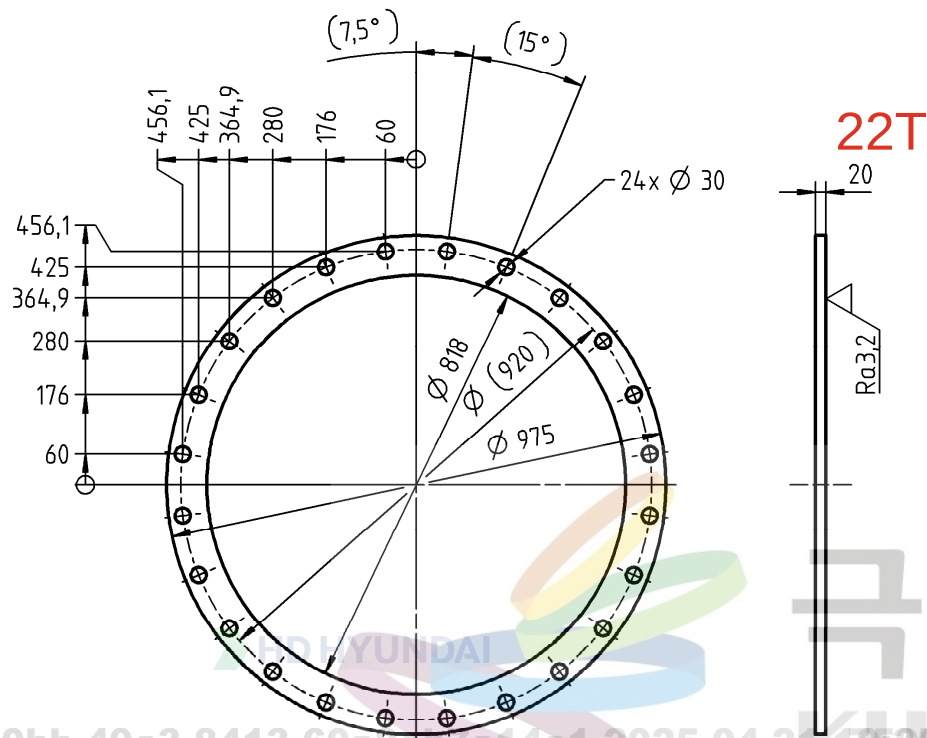

√ Ra12,5 (√ Ra3,2)

ALL UNTOLERANCED COORDINATE-DIMENSIONS
FOR THE BORES HAVE TO BE ± 0.5

NOTE)

용접 후 HOLE 가공 할 것.

Date	Designed	Checked	Approved	Action code	Exchangability	Change / Replacement	ECN No.	Rev
2024-02-19	LSO	JDH	AJY					0
Similar Drawing No.				Licensor's Drawing No.		PTAA024291		
Previous Drawing No.				Supplement Drawing No.				
Engine / Product Type				Title		FLANGE		
Description				Drawing No.		A23-369447-8		
Page No.				01 / 01		Size		A3
LIT. Material / Blank				W-FU-235-JR		Material / Blank		SS400
Mass(hg)				32.049		Units		mm kg
Projection				Scale		Information No.		Security
								B

Tolerances for dimensions without tolerance indication (ISO 2768-1980)									
This standard states the permissible deviations for dimensions without direct tolerance indications on metallic components manufactured by machining.									
Permissible deviation	Basic size range(mm)	up to 6	over 6 up to 30	over 30 up to 120	over 120 up to 315	over 315 up to 1000	over 1000 up to 2000	over 2000 up to 4000	over 4000 up to 10000
Medium series		±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±1.6	±2.5

Standard for surface roughness									
The basic symbolic and class number are in according with ISO 1302-1978									
Class No.	N1	N2	N3	N4	N5	N6	N7	N8	N9
Rmax, μ	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3