


NO.	DESCRIPTION	SIZE	MAT'L	Q'TY	REMARK
01	-	-	SUS304	-	-

572:5-1-5
672:8-1-6

2EA

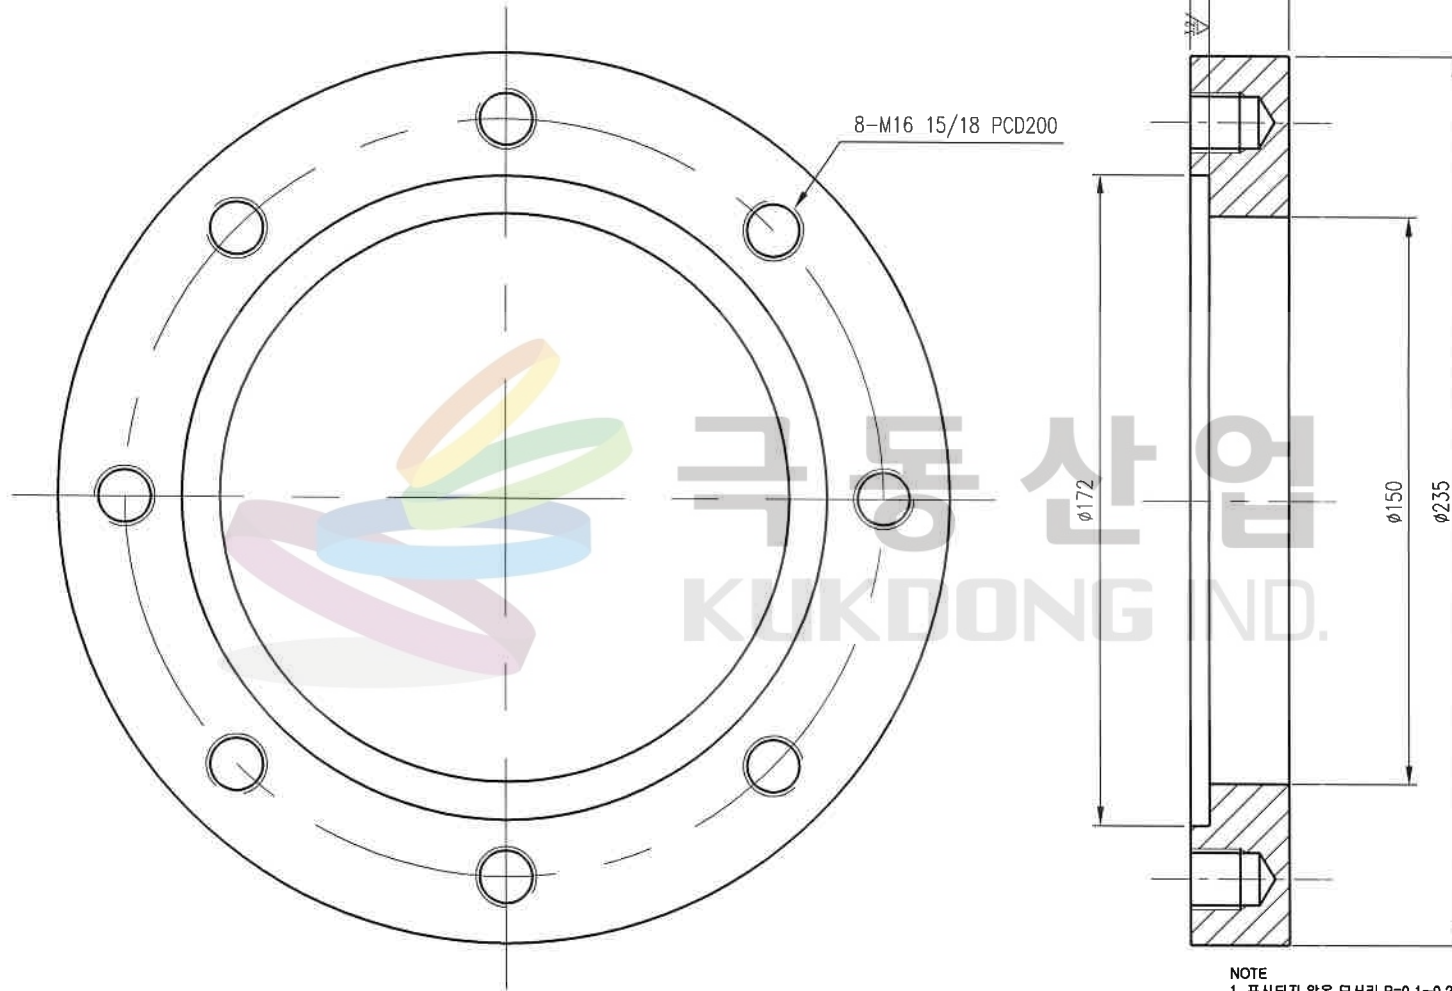

NOTE

- 표시되지 않은 모서리 R=0.1~0.2, C=0.3~0.5.
- 날카로운 모서리 제거 할 것.

-	-	-	-	00
DATE	DWG.	CHK.	CHANGE/REPLACEMENT	C.NO
P L A N H I S T O R Y				
CUSTOMER	-	PROJECT	-	
MANAGER	-	TITLE	FLANGE	
CHIEF	-			
CHK.BY	-			
DWG.BY	D.G.LEE	DWG.DATE: 2024-10-07	SCALE: 1/1	SIZE: A3
ISO 9001 KUK DONG IND., ENG.			REF.DWG.	-
			DWG.NO.	KD-241007-L2

This drawing is the property of KUK DONG IND., and is to be treated as confidential by the party to whom it has been submitted by KUKDONG IND., and is not to be disclosed to third party without the specific prior written permission of KUK DONG IND.,
이 도면은 Kuk Dong Ind.의 자산이므로 당사의 승인없이 이 도면을 제3자에게 양도, 복사, 판매하거나, 이 도면의 내용을 무단으로 제3자에게 공개하는 것은 불법입니다.

SURFACE ROUGHNESS SYMBOL							Tolerances for dimensions without tolerance indication (ISO 2768-1989)						
Rmax.	100S	50S	25S	12.5S	6.3S	3.2S	This standard states the permissible deviations for dimension without direct tolerance indications on metallic components manufactured by machining.						
Ra	✓	23/	12.5/	6.3/	3.2/	1.6/	Nom measurement (mm)						
ROUGH	▽	▽	▽	▽	▽	▽	Permissible deviations						
							0.5 up to 6	over 6 up to 30	over 30 up to 120	over 120 up to 315	over 315 up to 1000	over 1000 up to 2000	Medium series
							±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	