




Xplore the world of

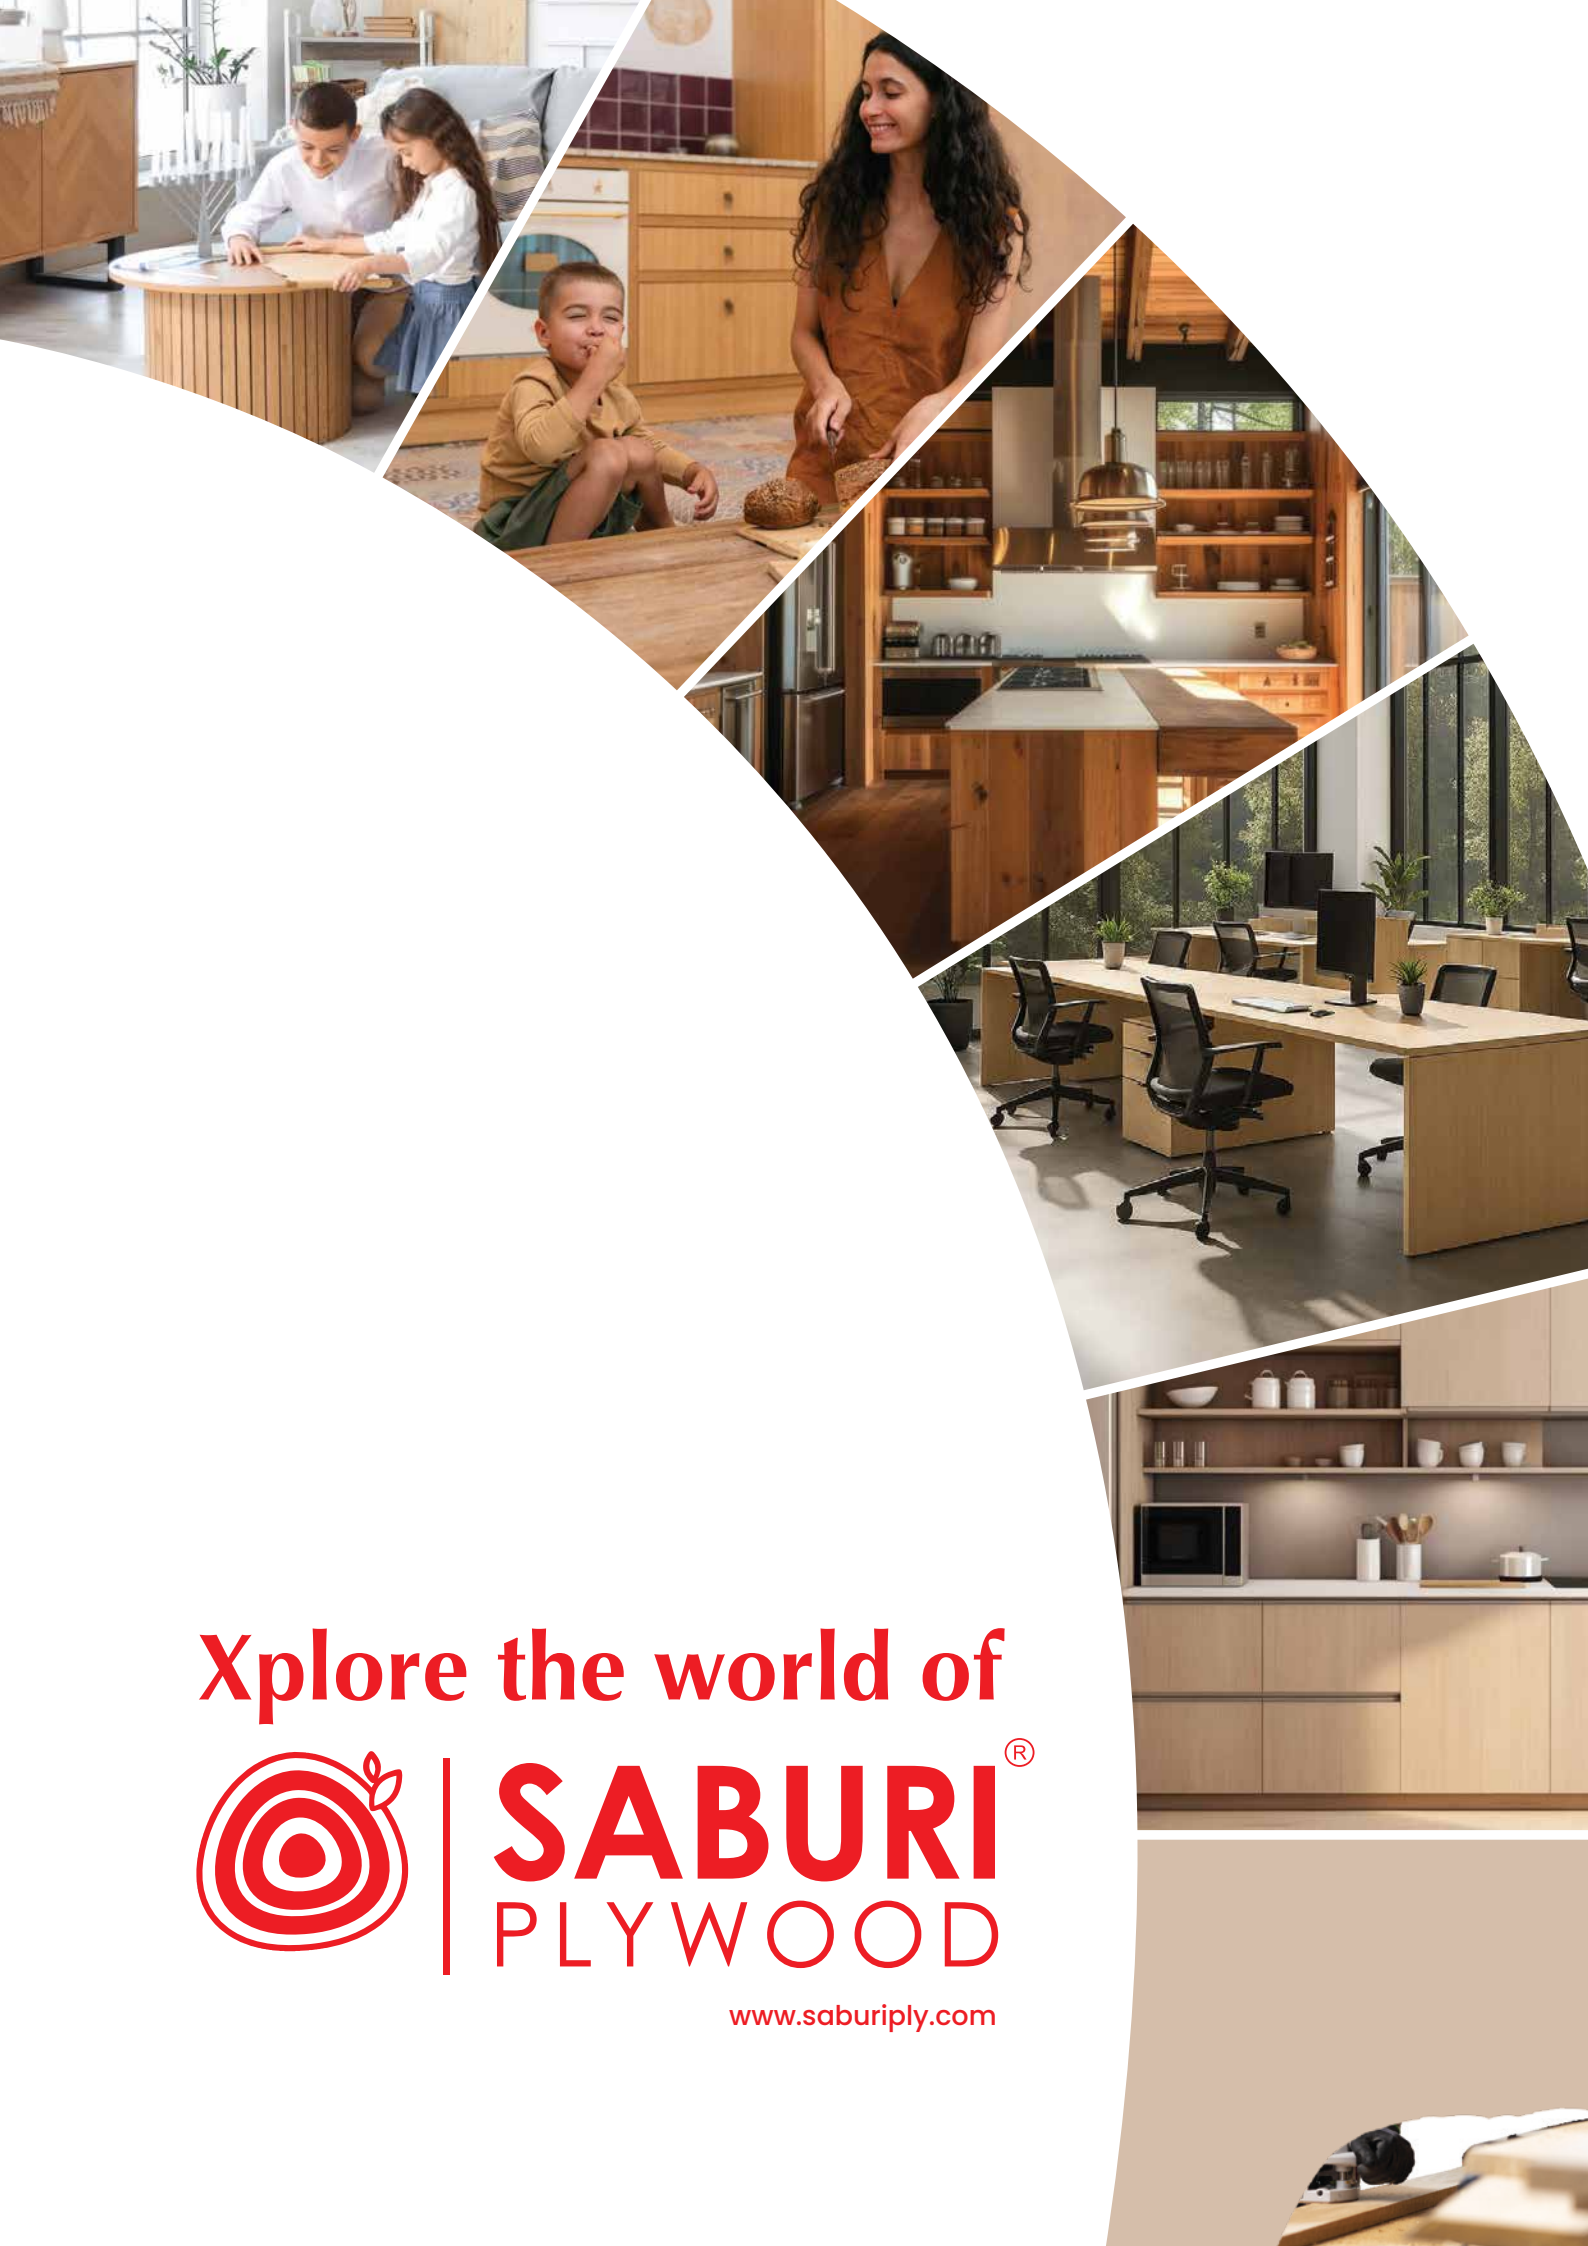

SABURI[®]
PLYWOOD

www.saburiply.com



Know About Saburi Flushdoor

VISION & MISSION

Dedicated to ensure a performance-oriented service to our customers, Saburi Plywood is one of the best Plywood brands in India. One of the leaders of the Plywood Industry. Saburi Panels Pvt. Ltd. is ISO 9001: 2015, ISOUS 14001: 2015 & ISO 45001 : 2018, FSC & CARB in certified under UFA. We are operating PAN India level. With an array of products and services under a same brand, Saburi Plywood is the best choice industrial requirement, carpenters, architects and dream projects.

With the hard work and sincere efforts over a long period of time, Saburi Plywood has mastered the business of Plywood manufacturing and marketing to become one of the best plywood brands in India.

We at Saburi Plywood have old brains to run the operation with the new & advance technology of production. Being the manufacturers of premium plywood in India, Saburi Plywood shares the quest for excellence in the Plywood Industry and utmost customer satisfaction has always been our first target.

We at Saburi Ply strive to maintain a balance between development and environmental sustainability. Our goal is to undertake projects that strictly adhere to environmental safety norms while minimizing water consumption. As an eco-friendly company, we are committed to protecting the planet. We strongly believe that if we do not take environmental issues seriously today, future generations will hold us accountable for our irresponsible actions.

Saburi Ply is a responsible corporate entity. Our mission aligns with national initiatives such as 'Make in India,' 'Skill India,' and the 'Swachh Bharat' mission. We are dedicated to empowering youth by enhancing skill development, making our nation a global leader in human resources, and promoting self-reliance.



Saburi Flush Doors

SABURI Flush Doors are of guaranteed quality. Flush Doors are made in varying constructions & thickness without impairing efficiency to meet exactly the security needs for the building. The wide range of choice in quality of material like: Timber, adhesive used and processing techniques enable manufacturer to offer a Flush Door capable of giving efficient and needed protection. Excellent quality Flush Doors are manufactured from 100% Pinewood and are of solid core construction with BN & BD type.

Flush Doors are framed in seasoned battens: both the stiles are made with one finger joint, pressed at high pressure & controlled temperature and bonded with BWP grade phenol formaldehyde synthetic adhesive conforming to IS:848-2006. SABURI.

IS: 2202



Flush Doors combine simplicity, pleasing appearance, clean & beautiful finish.

Unique Features

- Battens made exclusively from selected single species of hardwood timber.
- Battens machined and planed to the required thickness, preservative treated and season kiln dried.
- Battens individually treated with toxicants for long lasting protection against insects.
- Bonded with boiling-water proof synthetic Phenol Formaldehyde adhesive.
- Adhesive specially tinged with toxicants and antidotes.

Application

Door shutters in homes and offices

Available Thickness

- 30 mm & 35 mm

FACTORY TEST REPORT FOR WOODEN FLUSH DOOR IS : 2202 - 1 (1999)

Details of Sample

Dimension	Height	Width	Thickness	Variation in the thickness 0.37 mm between any two points -not more than 0.8 mm
Requirment	± 5mm (nominal)	± 5mm (nominal)	± 1 mm (nominal)	
Result	2.76mm	1.49mm	0.32mm	
Requirment			Result	
Squareness, mm	Deviation not more than 0.75mm l am per 500 mm Length		0.75mm	
General flatness. mm	Twist. Cupping & warping not greater than 6mm		3.00 mm	
Local planeness. Mm	Depth of deviation not greater than 0.5 mm		0.29 mm	
End immersion test	No delamination		No delamination	
Glue adhesion test	No delamination		No delamination	
Knife test	Minimum Pss Standard		Pass Standard	
Impact indentation. Mm	No cracking, tearing or delamination		No cracking, tearing or delamination	
	Depth of indentation not greater than 0.2 mm		0.17 mm	
Flexure (deflection in mm 15 mins after loading 50 kg).	Deflection at maximum load not greater than 1/30 of length & 1/15 of width, whichever is less		18.03 mm	
	Residual deflection not grearter than 1/10 of maximum deflection			
Shock resistance Soft and light body impact Soft and heavy body impact	No visible damage		No visible damage	
	No visible damage		No visible damage	
Buckling (deflection in mm) After 5 mins of 40 Kg loading 15 mins after load removal	No deterioration		No deterioration	
	Initial deflection not greater than 50 mm		39.30 mm	
	Residual deformation after 15 minutes of unloading not greater than 5 mm		2.33 mm	
Edge loading (deflection in mm) After 15 mins of 100 kgs loading 3 mins after load removal Lateral buckling Residual Lateral buckling	Deflection at max. load not greater than 5 mm		2.13 mm	
	Residual deflection after removal of load not greater than 0.5 mm		0.18 mm	
	Not more than 2 mm during loading		0.21 mm	
	No residual lateral buckling after load removal		No residual lateral buckling after load removal	
Screw withdrawal strength. N	Not less than 1000		3084	
	Surface condition: no visible damage to the surface either by delamination of extra chipping off at the points of withdrawal		No visible damage to the surface either by dela- mination of extra chipping off at the points of withdrawal	
Varying humidity test	No visible warping, twisting or delamination		No visible warping, twisting or delamination	
	Maximum departure from the general planeness not more than 1mm		0.75 mm	
	Recovery- At least 90% of the change in dimension		99.27%	
Misuse	No permanent deformation of the fixing or any other part of the doorset in hindering its normal working after test.		No permanent deformation of the fixing or any other part of the doorset in hindering its normal working after test.	
Workmanship and finish	Complies to the requirements		Complies to the requirements	



Corporate Office

SABURI PLYWOOD

New Town Square, Unit 3A, Chinar
Park, Dash Drone, Atghora, Rajarhat,
Kolkata, West Bengal 700136

www.saburiply.com

