




Xplore the world of

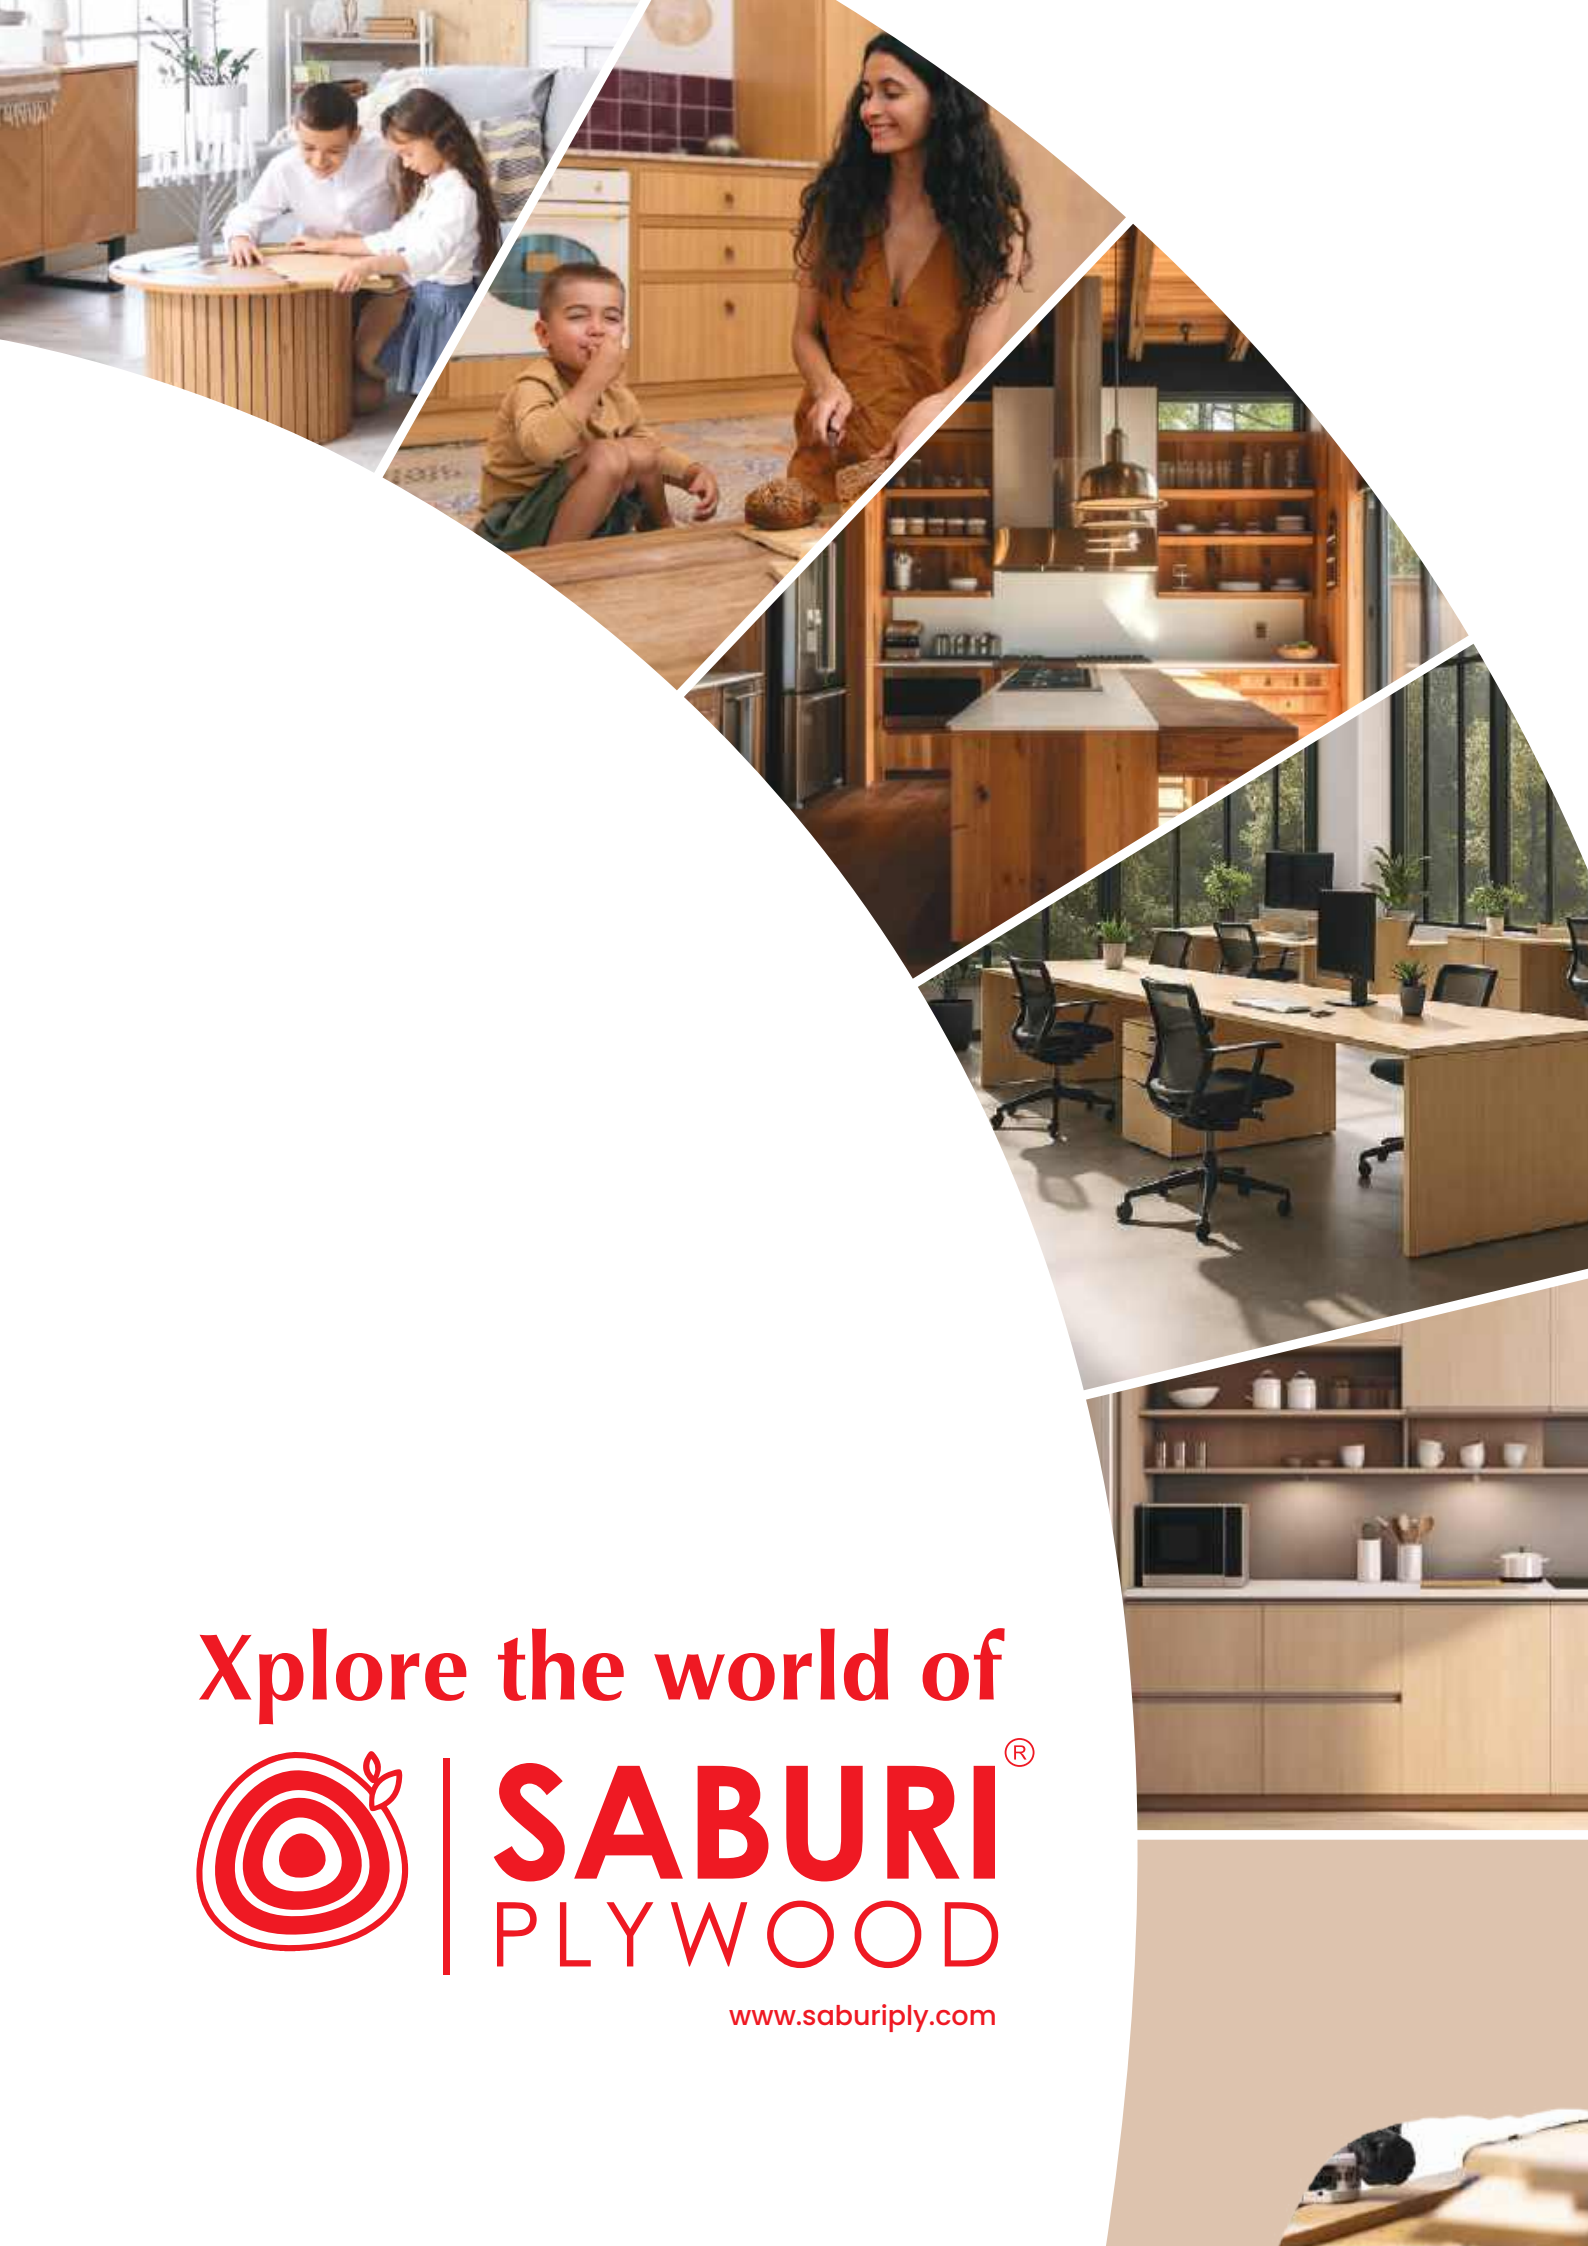

SABURI[®]
PLYWOOD

www.saburiply.com



Know About Saburi Plywood

VISION & MISSION

Dedicated to ensure a performance-oriented service to our customers, Saburi Plywood is one of the best Plywood brands in India. One of the leaders of the Plywood Industry. Saburi Panels Pvt. Ltd. is ISO 9001: 2015, ISOUS 14001: 2015 & ISO 45001 : 2018, FSC & CARB in certified under UFA. We are operating PAN India level. With an array of products and services under a same brand, Saburi Plywood is the best choice industrial requirement, carpenters, architects and dream projects.

With the hard work and sincere efforts over a long period of time, Saburi Plywood has mastered the business of Plywood manufacturing and marketing to become one of the best plywood brands in India.

We at Saburi Plywood have old brains to run the operation with the new & advance technology of production. Being the manufacturers of premium plywood in India, Saburi Plywood shares the quest for excellence in the Plywood Industry and utmost customer satisfaction has always been our first target.

We at Saburi Ply strive to maintain a balance between development and environmental sustainability. Our goal is to undertake projects that strictly adhere to environmental safety norms while minimizing water consumption. As an eco-friendly company, we are committed to protecting the planet. We strongly believe that if we do not take environmental issues seriously today, future generations will hold us accountable for our irresponsible actions.

Saburi Ply is a responsible corporate entity. Our mission aligns with national initiatives such as 'Make in India,' 'Skill India,' and the 'Swachh Bharat' mission. We are dedicated to empowering youth by enhancing skill development, making our nation a global leader in human resources, and promoting self-reliance.



IS: 10701



Saburi Titanium Plus

Saburi Titanium is an ultra-premium plywood crafted with an extra Burma Gurjan timber core and BWP marine-grade technology. Engineered with advanced Firewall protection and phenol formaldehyde bonding, it delivers superior safety, durability, and long-lasting performance. Designed to resist termites, borers, and fungal attacks, Saburi Titanium ensures structural integrity for decades. Its exclusive GLP technology and Quad Pro innovation make it one of the strongest and most reliable plywoods in the industry.

Usage

Ideal for high-end furniture, modular kitchens, wardrobes, wall paneling, premium doors, partitions, luxury interiors, and marine/structural use. Its superior durability makes it perfect for wall paneling, partitions, false ceilings, and high-end office or retail interiors. With marine-grade reliability, it is also trusted for structural and specialized applications in challenging environments.

Unique Features

- EO emission compliant for a healthier environment
- Double face 1.2mm thick layer for extra strength
- Enhanced Burma Gurjan timber layer inside
- Termite & borer proof, antifungal treated
- 100% calibrated on both sides for smooth finish
- Bend resistant with balanced construction for dimensional stability
- Warp-free strength with Quad Pro technology
- Lifetime warranty assurance ensures structural integrity for decades. Its exclusive GLP technology and Quad Pro innovation make it one of the strongest and most reliable plywoods in the industry.

FACTORY TEST REPORT 10701 : 2012 (TITANIUM PLUS)

Manufacturing Month (C.U. No)	270625	Sample Details	19 mm (13 Ply)
Adhesive Used	Phenol Formaldehyde Type Synthetic Resin (BWP)	Veneer Thickness	
No. of Plywood Pressed	2440 × 1220 × 19 mm	Face Veneer: 0.60 mm × 2	0.60 mm × 2
Face Veneer Species	Gurjan	Core Veneer: 1.7 mm × 11	1.7 mm × 11
Core Veneer Species	Gurjan & Eucalyptus	Preservative Used: ACC	ACC

Dimension	Length	Width	Thickness	Density
Prescribed Value	+6MM, -0MM	+3MM, -0MM	±5%	±5%
Observed Value	2444 (+ 4 mm)	1222 (+ 2 mm)	19.24 (1.2%)	816.32 KG Per CBM
Squareness (%)			Prescribed Value 0.20%	Observed Value 0.13%
Edge Straightness (%)			0.20%	0.09%
Moisture Content (%)			5 - 15%	(7-9)%
Glue Shear Strength (N) Dry Stage Wet Stage Resistance to Micro-Organisms	Avg		1350	1419
	Min Indv		1100	1319
	Avg		1000	1216
	Min Indv		800	1113
	Avg		1000	1247
	Min Indv		800	1153
Tensile Strength Parallel to the Face Grain Perpendicular to the Face Grain Compressive Strength Parallel to the Face Grain Perpendicular to the Face Grain	Min. 55.00		63.18	
	Min. 35.00		42.98	
	Min. 35.00		40.91	
	Min. 30.00		38.71	
Static Bending Strength Test Modulus of Elasticity (N/mm²) Parallel to the Face Grain Perpendicular to the Face Grain Modulus of Rupture (N/mm²) Parallel to the Face Grain Perpendicular to the Face Grain	Average		Min. 7500	10341
	Min Individual		Min. 6700	10113
	Average		Min. 4000	8553
	Min Individual		Min. 3600	8442
	Average		Min. 50	56.32
	Min Indv		Min. 45	53.87
	Average		Min. 30	42.91
	Min Individual		Min. 27	42.11
Wet Bending Strength Test Modulus of Elasticity (N/mm²) Parallel to the Face Grain Perpendicular to the Face Grain Modulus of Rupture (N/mm²) Parallel to the Face Grain Perpendicular to the Face Grain	Average		Min. 3750	5888
	Min Individual		Min. 3400	5297
	Average		Min. 2000	5949
	Min Individual		Min. 1800	5341
	Average		Min. 25	42.99
	Min Indv		Min. 22	38.71
	Average		Min. 15	41.05
	Min Individual		Min. 13	39.37
Resistance to Water (After 72 Hrs. boiling)			Min. Pass Stnd	MPS
Resistance to Micro-Organisms			Min. Pass Stnd	MPS
Panel Shear Strength			12.5	13.57
Modulus Of Rigidity			588	697
Rolling Shear Strength			3	4.02
Retention of Preservative			12 KG/M³	12.92 KG/M³
Workmanship & Finish			Min. Pass Stnd.	MPS



Saburi Perennial Ply

is manufactured from the best quality Burma Gurjan timber. It is bonded with phenol formaldehyde resin and is subjected to Permanent preservative treatment by vacuum impregnation. This makes it resistant to marine borer attacks and enables it to with stand saline water, It has high strength that can tolerate turbulent seas and it's resistant to alternate wetting and drying.

Available Thickness

- Plywood: 4 MM to 25 MM
- Block Board: 19 MM & 25 MM

IS: 10701



Unique Features

- Grandeur | EO emission | Double face .6mm
- Pressure impregnated with preservatives.
- Boiling water and termite proof*
- Made up of non toxic compounds
- Three stages preservative treated
- Antifungal treated | Calibrated
- Bend resistant : Balanced construction ensures dimensional stability which prevents warp and builds strength
- Made of veneers cooked at 60 degrees for removal of Starch & Micro-organism.
- Made through Quad-Pro Technology
- Money back guarantee
- Life time guarantee* 700%

Application

- An elite class product which can be used to make furniture for personal and commercial spaces, hotel suites, auditoriums, dining halls, and also for partitions and panelling's.
- Best suited for coastal belts with heavy moisture content.
- Ship-building, boats | Structural applications

FACTORY TEST REPORT 10701 : 2012 (PERENNIAL)

Manufacturing Month (C.U. No)	270625	Sample Details	19 mm (13 Ply)
Adhesive Used	Phenol Formaldehyde Type Synthetic Resin (BWP)	Veneer Thickness	
No. of Plywood Pressed	2440 x 1220 x 19 mm	Face Veneer: 0.60 mm x 2	0.60 mm x 2
Face Veneer Species	Gurjan	Core Veneer: 1.7 mm x 11	1.7 mm x 11
Core Veneer Species	Gurjan & Eucalyptus	Preservative Used: ACC	ACC

Dimension	Length	Width	Thickness	Density
Prescribed Value	+6MM, -0MM	+3MM, -0MM	±5%	±5%
Observed Value	2444 (+ 4 mm)	1222 (+ 2 mm)	19.24 (1.2%)	816.32 KG Per CBM
Squareness (%)			Prescribed Value	Observed Value
			0.20%	0.13%
Edge Straightness (%)			0.20%	0.09%
Moisture Content (%)			5 - 15%	(7-9)%
Glue Shear Strength (N) Dry Stage	Avg	1350	1419	
	Min Indv	1100	1319	
Wet Stage	Avg	1000	1216	
	Min Indv	800	1113	
Resistance to Micro-Organisms	Avg	1000	1247	
	Min Indv	800	1153	
Tensile Strength Parallel to the Face Grain	Min. 55.00		63.18	
	Min. 35.00		42.98	
Compressive Strength Parallel to the Face Grain	Min. 35.00		40.91	
	Min. 30.00		38.71	
Static Bending Strength Test Modulus of Elasticity (N/mm²) Parallel to the Face Grain	Average	Min. 7500	10341	
	Min Individual	Min. 6700	10113	
Perpendicular to the Face Grain	Average	Min. 4000	8553	
	Min Individual	Min. 3600	8442	
Modulus of Rupture (N/mm²) Parallel to the Face Grain	Average	Min. 50	56.32	
	Min Indv	Min. 45	53.87	
Perpendicular to the Face Grain	Average	Min. 30	42.91	
	Min Individual	Min. 27	42.11	
Wet Bending Strength Test Modulus of Elasticity (N/mm²) Parallel to the Face Grain	Average	Min. 3750	5888	
	Min Individual	Min. 3400	5297	
Perpendicular to the Face Grain	Average	Min. 2000	5949	
	Min Individual	Min. 1800	5341	
Modulus of Rupture (N/mm²) Parallel to the Face Grain	Average	Min. 25	42.99	
	Min Indv	Min. 22	38.71	
Perpendicular to the Face Grain	Average	Min. 15	41.05	
	Min Individual	Min. 13	39.37	
Resistance to Water (After 72 Hrs. boiling)			Min. Pass Stnd	MPS
Resistance to Micro-Organisms			Min. Pass Stnd	MPS
Panel Shear Strength			12.5	13.57
Modulus Of Rigidity			588	697
Rolling Shear Strength			3	4.02
Retention of Preservative			12 KG/M³	12.92 KG/M³
Workmanship & Finish			Min. Pass Stnd.	MPS



Saburi Club H+

Surety for furniture, a premium for life. Give your home the security and reliability of Saburi Club H+, a flagship product from the house of Saburi Ply. Infused with anti-bacterial properties and EO emission it makes it safe for families. What's more, it comes with 500% lifetime warranty. Should anything happen to your furniture, Saburi Ply gives assurance to compensate for its value, or 5 times the cost of plywood, whichever is lower.

Available Thickness

- Plywood: 4 MM to 25 MM
- Block Board: 19 MM & 25 MM


IS: 10701



Unique Features

- EO emission | Boiling water and termite proof*
- Antifungal Treated | Calibrated
- Bend resistant : Balanced construction ensures dimensional stability which prevents warp and builds strength
- Made from high quality treated hardwood veneers
- Manufactured through QUADPRO Process
- Mechanically Pressure treated
- Withstands all climatic conditions
- Life time guarantee* 500%

Quad- Pro- Technology

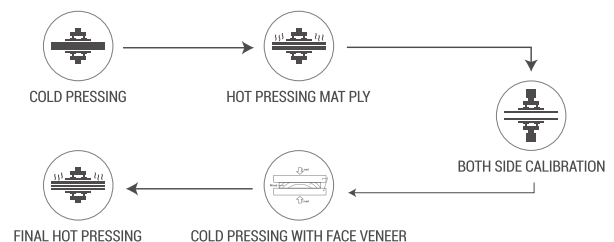

eZero
EMISSION

QUADPRO
TECHNOLOGY

FACTORY TEST REPORT 10701 : 2012 (Club H+)

MFG Month (C.U NO.) : 27/06/25		Plywood Pressed		Details of Sample	
Construction of Adhesive : Phenol Formaldehyde Type Synthetic Resin (BWP)		Dimensions: 2440 X 1220 X 19 MM Species Of Face Veneer Species Of Core Veneer		Thickness: 19 MM (13 Ply) Face Veneer : 0.60 mm X 2 Core Veneer : 1.7 mm X 11	
Details of Sample					
Dimension	Length	Width	Thickness	Density	
Prescribed Value	+6MM, -0MM	+3MM, -0MM	±5%	±5%	
Observed Value	2444 (+ 4 mm)	1222 (+ 2 mm)	19.24 (1.2%)	816.32 KG Per CBM	
Squareness (%)			Prescribed Value	Observed Value	
			0.20%	0.13%	
Edge Straightness (%)			0.20%	0.09%	
Moisture Content (%)			5 - 15%	(7-9)%	
Glue Shear Strength (N) Dry Stage		Avg	1350	1419	
		Min Indv	1100	1319	
Wet Stage		Avg	1000	1216	
		Min Indv	800	1113	
Resistance to Micro-Organisms		Avg	1000	1247	
		Min Indv	800	1153	
Tensile Strength Parallel to the Face Grain		Min. 55.00		63.18	
		Min. 35.00		42.98	
Compressive Strength Parallel to the Face Grain Perpendicular to the Face Grain		Min. 35.00		40.91	
		Min. 30.00		38.71	
Static Bending Strength Test Modulus of Elasticity (N/mm²) Parallel to the Face Grain		Average	Min. 7500	10341	
		Min Individual	Min. 6700	10113	
Perpendicular to the Face Grain		Average	Min. 4000	8553	
		Min Individual	Min. 3600	8442	
Modulus of Rupture (N/mm²) Parallel to the Face Grain		Average	Min. 50	56.32	
		Min Indv	Min. 45	53.87	
Perpendicular to the Face Grain		Average	Min. 30	42.91	
		Min Individual	Min. 27	42.11	
Wet Bending Strength Test Modulus of Elasticity (N/mm²) Parallel to the Face Grain		Average	Min. 3750	5888	
		Min Individual	Min. 3400	5297	
Perpendicular to the Face Grain		Average	Min. 2000	5949	
		Min Individual	Min. 1800	5341	
Modulus of Rupture (N/mm²) Parallel to the Face Grain		Average	Min. 25	42.99	
		Min Indv	Min. 22	38.71	
Perpendicular to the Face Grain		Average	Min. 15	41.05	
		Min Individual	Min. 13	39.37	
Resistance to Water (After 72 Hrs. boiling)			Min. Pass Stnd	MPS	
Resistance to Micro-Organisms			Min. Pass Stnd	MPS	
Panel Shear Strength			12.5	13.57	
Modulus Of Rigidity			588	697	
Rolling Shear Strength			3	4.02	
Retention of Preservative			12 KG/M³	12.92 KG/M³	
Workmanship & Finish			Min. Pass Stnd.	MPS	



IS: 5509



Saburi Fire Retardant

Saburi fire retardant plywood is treated with special fire retardant chemicals at the time of manufacture, so that it becomes better at resisting fires. SABURI fire retardant plywood is made as per IS:5509 specifications that ensures the rate of burning of the plywood should be more than 20 minutes, the time taken for flames to penetrate the plywood has to be more than 30 minutes. It is commonly used in public places, where the risk of fire has to be reduced such as for making the woodwork in the kitchens of large restaurants, or for the interior woodwork done in public theatres and halls, and the wood used in the railway compartments of our trains. It can also be used in homes and offices, for car interiors, and any other such places where the risk and spread of fire has to be reduced. The addition of fireproofing chemicals, gives the plywood better fire proofing qualities such as:

Unique Features

- Lesser tendency of spark and ignite
- Slow burning
- Decreased chances of fire to spread over the surface of the plywood
- Low flammability and lesser smoke generation
- Higher flame penetration time
- Specially formulated fireproofing chemicals infusion
- High density

Protection Time:

40 min, 60 min, 120 min

BlockBoard Thickness

6mm, 9mm, 12mm, 16mm, 19mm, 25mm

Resistance

Saburi Fire retardant plywood resists Spark and Ignite without any penetration. It offers 30% lesser smoke generation with extended flame penetration time. It offers very Slow burning, having a decreased tendency of the fire to spread over the surface of the plywood.

FACTORY TEST REPORT AS PER IS 5509-2000 (SABURI FR PLY)

Details of Sample

Sample Size	2440 X 1220 mm
Thickness	19 mm (13 ply)
Grade	FR (Ammonium Phosphate)
C.U. No.	140725
MFG. Month	July '2025
Type of Preservative Used	A.C.C Fixed Type (Ammonium Phosphate)

Dimension	Length	Width	Thickness	Density
Prescribed Value	+6MM, -0MM	+3MM, -0MM	±5%	±5%
Observed Value	2443 / 2443	1222 / 1222	18.95 to 19.30mm	748.91 KG Per CBM
			Prescribed Value	Observed Value
Squareness (%)			0.20%	0.10%
Edge Straightness (%)			0.20%	0.14%
Moisture Content (%)			5 - 15%	(9 to 13 %)
Adhesion of Plies (Knife Test)			Min. Pass Stnd.	MPS
Resistance to water, adhesion to plies (3 cycles of 8 hr. @100 ± 2° C in water & 16 hr. drying @ 65 ± 2° C)			Min. pass standard	Pass Standard
Static Bending Strength Test Modulus of Elasticity (N/mm²) Parallel to the Face Grain		Average Min Individual	5000 4500	7888 7078
Perpendicular to the Face Grain		Average Min Individual	2500 2200	6545 7194
Static Bending Strength Test Modulus of Rupture (N/mm²) Parallel to the Face Grain		Average Min Individual	40 36	61 58
Perpendicular to the Face Grain		Average Min Individual	20 18	54 60
Flammability Test		Prescribed Value Specified requirment time taken for second ignition shall not less than 30 mins		Observed Value Observation - 39 mins 56 sec
Flame Penetration Test		Specified requirment time taken for flame penetration shall not be less than (15/6 X Thickness)		Observation - 53 mins 03 sec
Rate Of Burning Test		Specified requirment time taken to lose wight from (30 to 70%) Shall not be less than 20 mins.		Observation - 32 mins 45 sec
Workmanship & Finish		Min. Pass Stnd		Satisfactory



Marine Grade, IS: 710



Saburi Gold Plywood

Is your kitchen cabinetry falling apart due to constant exposure to moisture? Then opting for Saburi Ply's Gold plywood will be your best decision. It is chemically treated, made of select hardwood, comes with a long panel and phenolic glue core veneers.

Each veneer is treated with preservatives prior to pressing, ensuring uniform distribution of moisture and adhesive. So now, instead of worrying, you can enjoy cooking your favourite dishes.

Available Thickness

- Plywood: 4 MM to 25 MM
- Block Board: 19 MM & 25 MM

Unique Features

- Boiling Water proof
- Manufactured through Quad-Pro Process
- Resistant to termites and powdering
- Antifungal treated
- Calibrated
- Made from select hardwood
- Can be used for making indoor as well as outdoor furniture

Application

This category of plywood is most suitable for partition and panelling, panel insert in doors, false ceiling, lawn chairs, garden tables and chairs, cavity flooring, cupboard shelving and also as kitchen cabinets. This plywood is perfect to construct boats, kayaks, etc. Saburi Gold Plywood and is of high quality hardwood, bonded with un-extended BWP type phenolic resin using superior technology. The outstanding feature of this plywood is its ability to withstand dry and wet conditions, making it an ideal choice for boats, roofing and other outdoor applications where it's exposed to water for a prolonged period

FACTORY TEST REPORT AS PER IS : 710 -2010 (GOLD 710)

Details of Sample

Sample Size	2440 X 1220 mm
Thickness	19 mm (13 ply)
Grade	Marine (GOLD)
C.U. No.	140825
MFG. Month	Aug '2025
Type of Preservative Used	A.C.C Fixed Type

Dimension	Length	Width	Thickness	
Prescribed Value	+6MM, -0MM	+3MM, -0MM	±5%	
Observed Value	2442 / 2443	1221 / 1222	18.87 to 19.29mm	
			Prescribed Value	Observed Value
Squareness (%)			0.20%	0.10%
Edge Straightness (%)			0.20%	0.13%
Moisture Content (%)			5 - 15%	10 to 11 %
Adhesion of Plies (Knife Test)			Min. Pass Stnd.	MPS
Tensile Strength (N/mm ²)				
Parallel to the Face Grain			Min. 42.00	48.54
Perpendicular to the Face Grain			Min. 25.00	39.70
Sum of Both			Min. 84.50	88.24
Static Bending Strength Test				
Modulus of Elasticity (N/mm ²) <u>Parallel to the Face Grain</u> Perpendicular to the Face Grain	Average		Min. 7500	7765
	Min Individual		Min. 6700	7244
	Average		Min. 4000	5876
	Min Individual		Min. 3600	4981
Modulus of Rupture (N/mm ²) <u>Parallel to the Face Grain</u> Perpendicular to the Face Grain	Average		Min. 50	59.77
	Min Individual		Min. 45	49.88
	Average		Min. 30	45.12
	Min Individual		Min. 27	37.72
Wet Bending Strength Test				
Modulus of Elasticity (N/mm ²) <u>Parallel to the Face Grain</u> Perpendicular to the Face Grain	Average		Min. 3750	4935
	Min Individual		Min. 3400	4442
	Average		Min. 2000	3846
	Min Individual		Min. 1800	3175
Modulus of Rupture (N/mm ²) <u>Parallel to the Face Grain</u> Perpendicular to the Face Grain	Average		Min. 25	38.72
	Min Individual		Min. 22	33.68
	Average		Min. 15	27.9
	Min Individual		Min. 13	24.92
Glue Shear Strength (N)		Average	Min. 1350	1689
		Min Individual	Min. 1100	1440
Resistance to Water (After 72 Hrs. boiling)			Min. Pass Stnd	MPS
Workmanship & Finish			Min. Pass Stnd	Satisfactory



IS: 303

SABURI SCOUT Plywood is dimensionally stable and amazingly durable and ensures satisfaction for the entire woodworking need according to the designers and architects.

Available Thickness

- 4mm, 6mm, 9mm, 12mm, 16mm, 18mm, 25mm

Unique Features

- Best for commercial interior furniture making.
- Manufactured by matured plantation timber of Eucalyptus and Poplar.
- Perform better than other brand because of its manufacturing process.

Application

Kitchen, Wardrobes, Almirahs, Tables, Partitions, cabinets, Panelling, Structural Home Building, Ceiling, Furniture, Cupboards, Staircases, Temples, Engineered Doors, Carved Surfaces, Handicrafts etc.

Saburi Scout Plywood

Made with high grade and Treated wood veneers from matured plantation timber of high density wood, each panel is crafted with extreme precision and care.

SABURI SCOUT plywood is pressed at 130°C and extreme pressure to compress the veneer-resin pack to obtain superior quality plywood.

The bonding process is done using highly viscous Melamine fortified resin with a high solid content which keeps its layers strongly bonded for a lasting affair. To ensure maximum protection, SABURI® SCOUT plywood is treated with unique and specially formulated chemicals to protect completely from Termite and Borer.

FACTORY TEST REPORT AS PER IS : 303-1989 (SCOUT)

Details of Sample

Sample Size	2440 X 1220 mm
Thickness	19 mm (13 ply)
MFG. Month	June 2025
Type of Preservative Used	A.C.C Fixed Type

	SCOUT BWP		SCOUT BWR		SCOUT MR	
Test	Prescribed	Observed	Prescribed	Observed	Prescribed	Observed
Length	+6MM, -0MM	2442/ 2443	+6MM, -0MM	2443/ 2443	+6MM, -0MM	2443/ 2443
Width	+3MM, -0MM	1221/1222	+3MM, -0MM	1222/1222	+3MM, -0MM	1222/1222
Thickness	±5%	18.87 to 19.29 MM	±5%	18.95 to 19.26 MM	±5%	18.87 to 19.45 MM
Squareness (%)	0.20%	0.10%	0.20%	0.10%	0.20%	0.10%
Edge Straightness (%)	0.20%	0.13%	0.20%	0.14%	0.20%	0.14%
Adhesion of Plies (Knife Test)	Min. Pass Stnd.	MPS	Min. Pass Stnd.	MPS	Min. Pass Stnd.	MPS
Moisture Content (%)	5-15%	9-10%	5-15%	9-10%	5-15%	9-10%
Tensile Strength Parallel to the Face Grain Perpendicular to the Face Grain Sum of Both	Min. 42.00 Min. 25.00 Min. 67.00	48.50 39.70 88.24				
Static Bending Strength Test Modulus of Elasticity (N/mm ²) Parallel to the Face Grain Average Min Individual Perpendicular to the Face Grain Average Min Individual Modulus of Rupture (N/mm ²) Parallel to the Face Grain Average Min Individual Perpendicular to Face Grain Average Min Individual	Min. 7500 Min. 6700 Min. 4000 Min. 3600 Min. 50 Min. 45 Min. 30 Min. 27	7765 7244 5876 4981 59.77 49.88 45.12 37.72	5000 4500 2500 2200 40 36 20 18	7984 7103 8972 7865 55.00 51.28 70.87 64.13	Min. 4000 Min. 3600 Min. 2000 Min. 1800 30 27 15 13	5254 5089 3652 3398 37.29 34.78 32.97 29.59
Wet Bending Strength Test Modulus of Elasticity (N/mm ²) Parallel to the Face Grain Average Min Individual Perpendicular to Face Grain Average Min Individual Modulus of Rupture (N/mm ²) Parallel to the Face Grain Average Min Individual Perpendicular to Face Grain Average Min Individual	Min. 3750 Min. 3400 Min. 2000 Min. 1800 Min. 25 Min. 22 Min. 15 Min. 13	4935 4442 3846 3175 38.72 33.68 27.9 24.92				
Glue Shear Strength (N) Average Min Individual	Min. 1350 Min. 1100	1689 1440				
Resistance to Water (After 72 Hrs. boiling)	Min. Pass Stnd	MPS	Min. Pass Stnd	MPS	Min. Pass Stnd	MPS
Workmanship & Finish	Min. Pass Stnd	Satisfactory	Min. Pass Stnd	Satisfactory	Min. Pass Stnd	Satisfactory



SABURI[®]
DEFINITE



Saburi Definite Plywood

Keeping the need of kitchen we have manufactured a special plywood for kitchen application. SABURI DEFINITE is 100% calibrated kitchen special plywood manufactured special, for long life and perfect kitchen woodworking. It is made with high density hard wood veneer and bonded with High solid content PF resin to make it tough against moisture. Since it gets used in kitchen interior so it is made with eco-friendly E1 graded resin that resists to release harmful emission.

Kitchen is one place around the home, where furniture is likely to be exposed to water. So the plywood that we should select for making the kitchen cabinets must have the ability to withstand water. SABURI DEFINITE is perfect for your kitchen furniture. It enhances the life of your beautiful kitchen also provide perfect finish to woodworking.


Calibrated Plywood, Designed For Oem's

Unique Features

- Both side calibrated plywood
- Water proof panel
- High density plywood
- Eco-friendly panel
- Completely treated against termite and borer
- High load bearing capacity
- Perfect thickness to match up with kitchen cabinets.
- Made from 100% hardwood
- Can be used for making indoor as well as outdoor furniture

Available Thickness

- 16mm

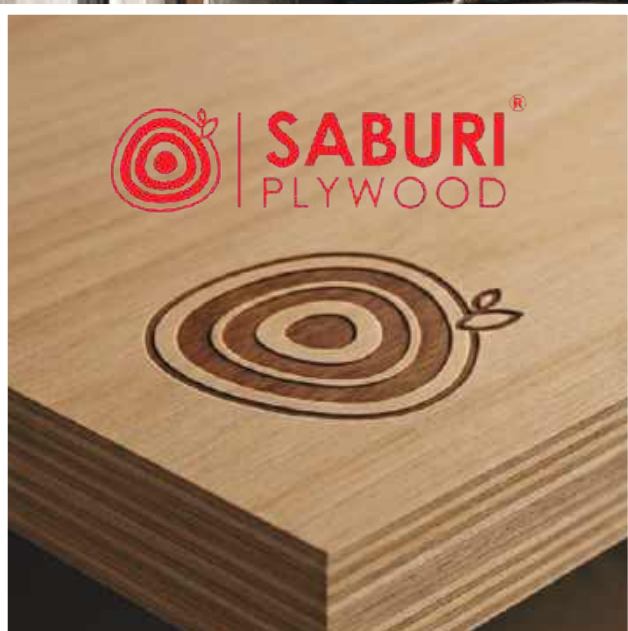

Saburi® 10 ft × 4 ft Plywood

Saburi® 10ft×4ft Plywood is crafted from premium-quality Gurjan timber and bonded with high-performance phenol formaldehyde resin. It undergoes permanent preservative treatment through vacuum impregnation, ensuring exceptional resistance against marine borers, termites, and fungal attacks. Designed to withstand saline water exposure, turbulent conditions, and repeated cycles of wetting and drying, this long-size plywood delivers superior durability and structural strength. Its balanced construction and advanced manufacturing process ensure high dimensional stability, making it ideal for demanding applications where reliability and long spans are required.

Unique Features

- Premium Grandeur finish | E0 emission compliant | Double-face 0.6 mm veneers
- Pressure-impregnated with advanced preservatives
- Boiling water resistant & termite proof*
- Manufactured using non-toxic compounds
- Three-stage preservative treatment for enhanced longevity
- Anti-fungal treated | Precisely calibrated
- Bend-resistant design with balanced construction to prevent warping
- Veneers cooked at 60°C to eliminate starch and microorganisms
- Manufactured using Quad-Pro Technology for superior performance
- Money-back guarantee
- Lifetime guarantee* (up to 700%)



Applications

- An elite-grade plywood suitable for premium furniture in residential and commercial spaces, including hotel suites, auditoriums, dining halls, offices, and luxury interiors
- Ideal for partitions, panelling, wardrobes, and full-height installations from floor to ceiling—made easy with the 10 ft × 4 ft long format
- Highly recommended for coastal and high-moisture regions
- Suitable for structural and load-bearing applications

Grades Available

- Structural Grade
- Marine Grade
- Fire Retardant Grade
- Available Thickness
- Plywood: 4 mm to 25 mm
- The 10 ft × 4 ft long ply format reduces joints, enhances aesthetics, improves strength, and ensures faster installation—making Saburi® the perfect choice for modern, high-performance construction and interior solutions.

10X4 FT



Corporate Office

SABURI PLYWOOD

New Town Square, Unit 3A, Chinar
Park, Dash Drone, Atghora, Rajarhat,
Kolkata, West Bengal 700136

www.saburiply.com

