Pleated Tennis Skort

vn-pdf-p06-2-r3-c2

Resolved reference finding

Resolved the hidden-construction ambiguity by authoring an attached-inner-short skort design. The existing pleated outer silhouette, piping and front emblem are retained. A separate inner-short construction drawing and measurement schedule are supplied. This is a new documented design specification, not a claim that an unseen sample was inspected.

Version precedence

R10 correction pack supersedes conflicting R07/R08/R09 descriptions, references and affected dimensions. Retain unchanged original specifications. This closes the reference finding, not bulk-production approval.

Design authority and limits

R10 is an authored design-reference correction under the owner instruction to finish the findings. Rendered rear views and hidden construction are documented design decisions. They are not photographs of manufactured samples. Actual fit, material performance, hardware tooling and embroidery sew-out still need factory validation.

Corrected references



pdf-p06-2-r3-c2-front



pdf-p06-2-r3-c2-back

Construction and artwork

Design features

Pleated outer skirt shell with saved white piping and emblem
Attached black stretch inner shorts
Outer shell and inner shorts joined at one waistband seam
Inner short hems free and concealed below shell

Material target

Outer: proposed black polyester-rich woven suitable for permanent pleating, 180-220 GSM. Inner shorts: proposed 90% polyester / 10% elastane jersey, 180 GSM. Confirm swatches and care tests.

Assembly

Pleat and join the outer shell; retain white piping. Construct inner shorts with stretch-compatible overlock seams and coverstitched hems. Join shell and inner-short waist edges into the same waistband, align side seams and crotch orientation. Keep inner hems free; tack inner to outer only at waistband, not at pleat hems.


Hardware

Soft waistband elastic; no exposed metal closure. Confirm entry stretch on the pattern and sample.

Artwork instruction

STYLE LOCK: Pleated Tennis Short. Use this garment’s exact saved colourway artwork and features. Preserve lettering, panel positions and proportions. Existing recorded artwork dimensions take precedence. R06 specifications do not authorize replacing an illustration with a generic logo. Vector artwork, placement strike-off and physical sample approval remain required.

Inner-short construction

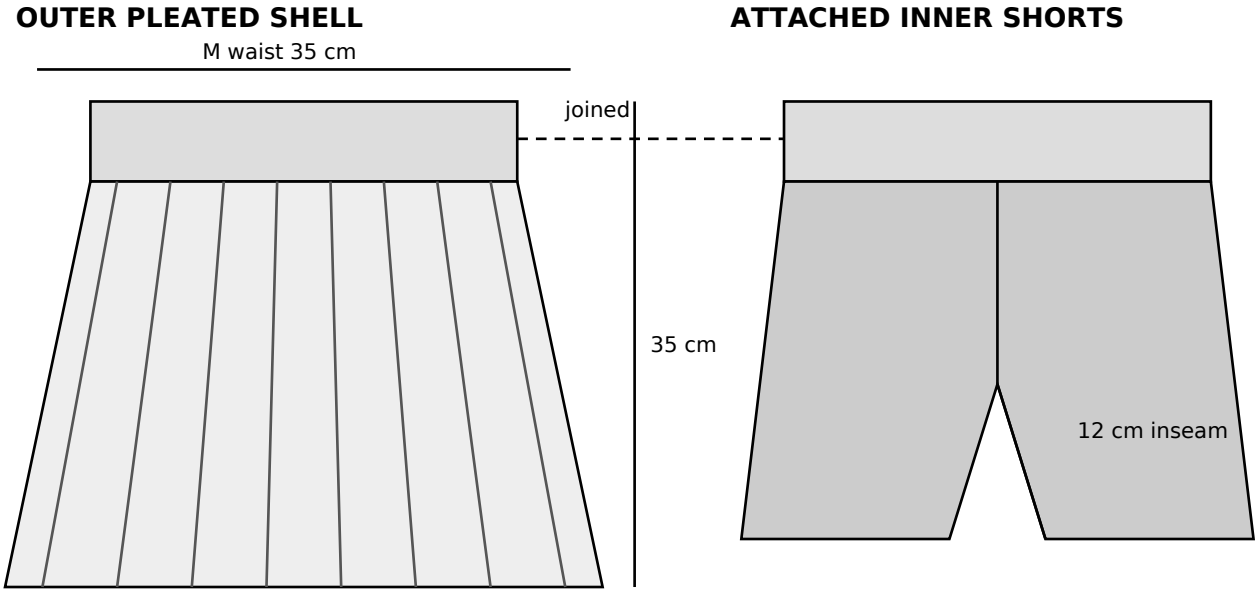

Both components caught into the same waistband seam; inner hem remains free.

Development schematic, not a cutting pattern. Dimensions are authored sampling targets.

Assembly sequence

1. Make and press the outer pleated shell. 2. Sew the two inner-short legs, crotch and stretch hems. 3. Align both waist openings, matching side and center marks. 4. Attach both components to the waistband. 5. Confirm the inner legs remain concealed during standing and movement; adjust the sample before bulk cutting.

Sampling measurements

R10 authored sampling targets, finished flat cm. Outer shell and inner shorts have separate charts. Outer length is measured from top waistband to hem; inner inseam from crotch junction to hem. These are design targets, not measurements inferred from hidden photographic detail.

Outer pleated shell / R10 targets

size	waist	hip	length
S	32.5	48.5	34
M	35.0	51.0	35
L	37.5	53.5	36
XL	40.0	56.0	37
XXL	42.5	58.5	38

Attached inner shorts / R10 targets

size	waist	hip	frontRise	backRise	inseam	legOpening
S	32.5	46.5	26	35	11.5	25.5
M	35.0	49.0	27	36	12.0	27.0
L	37.5	51.5	28	37	12.5	28.5
XL	40.0	54.0	29	38	13.0	30.0
XXL	42.5	56.5	30	39	13.5	31.5

Measurement rule

Widths are one-side flat widths, not body circumference. Retained numbers remain design targets. Do not scale mockup photographs for pattern dimensions. Confirm tolerances, seam reserves, fit and movement on the sample.