

Document Effective Date

11/11/2021



QatarEnergy-IS FALL PROTECTION PROCEDURE

DOC NO: IS-HSE-PRC-048

Rev: 01

Quality Reviewed By: OIH/14

NEC
Digitally signed
by Neeraj Tiwari
Date: 2021.11.09
11:45:46 +03'00'

CUSTODIAN DEPARTMENT	DOCUMENT AUTHOR	DOCUMENT OWNER
HSE (IDD EL-SHARGI)	 Digitally signed by Adam Azzi Date: 2021.11.09 11:48:43 +03'00'	Soud Al- khinji Digitally signed by Soud Al-khinji Date: 2021.11.10 08:51:43 +03'00'
	OIH/15	OIH/1

FINAL APPROVAL
 Digitally signed by Stephane Gri Date: 2021.11.11 12:21:25 +03'00'
OIH

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048	REV. 01
---	--	----------------

TABLE OF CONTENTS

Page No.

1.0	PURPOSE	3
2.0	SCOPE AND APPLICABILITY	3
3.0	ROLES AND RESPONSIBILITIES	3
3.1	SM (SITE MANAGER).....	3
3.2	WORKSITE SUPERVISOR.....	3
3.3	SAFETY OFFICER.....	3
4.0	PROCEDURAL STEPS	3
4.1	HAZARD IDENTIFICATION & MANAGEMENT	3
4.2	FALL PROTECTION TRAINING	4
4.3	PERSONAL PROTECTIVE EQUIPMENT	4
4.4	EQUIPMENT INSPECTION	6
4.5	AUDITS	7
4.6	FALL PROTECTION SYSTEMS	7
4.7	RESCUE PROCEDURES	10
4.8	CONTRACTORS.....	11
5.0	REFERENCES TO OTHER DOCUMENTS	11
6.0	DEFINITIONS	11
	APPENDIX.....	13
	APPENDIX A - REVISION HISTORY LOG	13
	APPENDIX B - LIST OF ABBREVIATIONS	13
	APPENDIX C: ELIMINATING & CONTROLLING FALL HAZARDS.....	14
	APPENDIX D : CLEARANCE CALCULATION EXAMPLE.....	15
	APPENDIX E: RESCUE PLAN (IS-HSE-PRC-048-001)	16
	APPENDIX F: FALL PROTECTION AUDIT (IS-HSE-PRC-048-002).....	18

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048 REV. 01
---	--

1.0 PURPOSE

The purpose of this procedure is to identify, evaluate and mitigate fall hazards.

2.0 SCOPE AND APPLICABILITY

This procedure applies at all QatarEnergy-IS worksites and facilities where QatarEnergy-IS have operational control whenever persons are exposed to work at height or fall hazards.

3.0 ROLES AND RESPONSIBILITIES

3.1 SM (SITE MANAGER)

Shall be responsible to ensure that fall hazards are identified and mitigated during the ISSoW (Integrated Safe System of Work) process. That work activities involving use of fall protection are routinely audited for compliance. That fall protection equipment is routinely inspected, certified and registered.

3.2 WORKSITE SUPERVISOR

Shall be responsible to ensure anchor points have been identified and detailed within the rescue plan. The rescue plan has been signed off and rescue team informed of the activity.

The fall protection equipment is fit for service and certified. Personnel are adequately trained in fall protection. That the Risk Assessment controls have been implemented.

3.3 SAFETY OFFICER

Shall be responsible to ensure worksite compliance with this procedure by regular monitoring of work at height activities.

4.0 PROCEDURAL STEPS

4.1 HAZARD IDENTIFICATION & MANAGEMENT

Employees and contractors have the responsibility to continuously evaluate the worksite and work activities to identify if fall hazards are present. The Site Manager (SM) has the responsibility via Integrated Safe System of Work (ISSoW) / Permit to Work (PTW) to ensure that fall protection has been evaluated as part of the work activity Risk Assessment and the elimination of work at height where practicable ensured.

Where a fall potential exists the hierarchy to be followed is:

- 1) Eliminate the hazard where practicable, or
- 2) Protect against the hazard

Hazard Elimination (Priority 1)

Avoid work at height or where standardized engineering controls, safe-work practices or operating procedures can eliminate the hazard, then such measures shall be implemented if they are practicable options.

Appendix C, Eliminating and Controlling Fall hazards provides hierarchy flow and guidance on eliminating fall hazards or suitable means of additional controls to eliminate fall potential.

Hazard Protection (Priority 2)

Where hazard elimination is not a practicable option, this procedure specifies the fall protection measures to be used, how they are to be used, who is responsible for overall supervision and who is to receive fall protection training.

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048 REV. 01
---	--

Where fall arrest systems are identified as the only safe work method the RA shall identify the reasons that other fall protection systems to eliminate the hazard, such as barriers, scaffolds, elevating work platforms, work boxes, work baskets, etc, cannot be used.

Where a fall to the same or a lower level exposes personnel to reinforcement bars or other equipment which may cause penetrating injuries, engineering controls to eliminate the potential hazard shall be implemented.

The RA and rescue plan - Appendix E (IS-HSE-PRC-048-001) shall identify suitable Anchorage Points, any objects that could be struck should a fall occur and additional hazards and mitigation to be used.

Tank Roof Access

Access to tank roofs shall be controlled via the applicable ISSoW system and comply with all the requirements of this procedure (I.e. Rescue Planning).

4.2 FALL PROTECTION TRAINING

QatarEnergy-IS HSE Training procedure (IS-HSE-PRC-002) identifies the training requirements of employees by designation. Minimum training requirements for contractors are identified in the HSE Exhibit of each specific contract.

Evidence of fall protection training shall be available for review at each location and shall be spot checked for compliance during worksite audit - Appendix F (IS-HSE-PRC-048-002). For Employee the electronic training management system can be referenced and for contractors such as Scaffolders or Rope Access Technicians hard copies shall be available at the location.

Fall protection training as a minimum shall include the following:

- Potential fall hazard identification
- Acceptable methods to reduce the risk of injury
- Wearing fall protection Personal Protection Equipment
- Selection, use and care of fall protection equipment
- Limitations on the use of Fall Arrest Systems and proper anchoring techniques
- Inspection and maintenance procedures as well as the proper way to wear fall protection Personal Protection Equipment.

Further/Refresher training shall be required but not limited to the following scenarios:

- Identification of further understanding or skill requirements
- Changes in the workplace, including job changes
- Changes to fall protection systems or equipment
- Changes in fall protection procedure.

4.3 PERSONAL PROTECTIVE EQUIPMENT

There are two types of fall prevention PPE (Personal Protective Equipment) systems. A Fall Prevention System (FPS) vents a person from falling. A Fall Arrest System (FAS) is designed to avoid or minimize the impact associated with a fall.

Only FPS or FAS PPE that meet the requirements of ANSI Z359 and are certified by the Safety Equipment Institute (or international equivalent) are authorized for use. QatarEnergy-IS Body belts are not authorised for use.

Components of FPS and FAS systems shall be supplied by the same manufacturer. Mixing manufacturer components can cause potential failure of equipment. Modification to any fall

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048 REV. 01
---	--

protection equipment (other than what is approved by the manufacture of such devices) is strictly prohibited. Fall protection equipment shall only be used for the purpose it was originally designed and intended for i.e. lanyards are not to be used for hoisting tools and materials, etc.

Only trained persons shall use fall protection devices and/or systems. Trained persons shall ensure compliance with manufacturer instructions regarding inspection, maintenance, and storage of the equipment.

Synthetic or natural fiber ropes shall not be used where there is a potential to contact hot equipment or piping. Fire retardant materials shall be considered during risk assessment for hot-work operations.

4.3.1 Fall Prevention Systems (FPS)

FPS consists of three components:

- An Anchorage Point,
- A tether (Fall Restraint System) and,
- A Full Body Harness.

The FPS tethers a person to a fixed point and allows movement about that point. The length of the tether limits the proximity of a person to an unprotected edge.

Existing steelwork, structures, pipework (where approved by a Qualified Person) or installed static lines can be used for anchoring an FPS.

When using Fall Prevention Systems, the following requirements apply:

- The Anchorage Point shall be capable of withstanding a force of 5000 pounds (22kN),
- No more than one person can be attached to any Anchorage Point, unless approved by the fall protection manufacturer (engineered systems) or a Qualified Person,
- The length of tether lines shall be checked to ensure that they do not exceed the distance to all unprotected edges,
- Tether snap hooks shall be compatible with those on the Full Body Harness. The snap hooks shall be double-action type (requiring two distinctive actions to be opened),
- Components of the system shall be checked for damage prior to use.

4.3.2 Fall Arrest Systems

The FAS is designed to avoid or minimize the injury to a person following a fall. A FAS operates by slowing and stopping a fall before a person hits a lower surface. FAS include an Anchorage Point, a Fall Arrest Device or Lanyard and a Full Body Harness. The types of Fall Arrest Devices include:

Type 1	A device that travels along an anchorage line and locks to the line when loaded in the direction of the line. It is used when working on slopes where a person may fall (rope grab).
Type 2	A self-retracting lifeline/inertia reel where a spring-loaded anchorage line plays out and locks when loaded.
Type 3	A self-retracting lifeline/inertia reel where a spring-loaded anchorage line plays out and locks when loaded but may be wound back as a winch to facilitate rescue.

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048 REV. 01
---	--

Energy Absorbers shall be integral to Type 2 and 3 devices, meaning that they require removal by the destruction of the device or the use of a special tool. If the Type 2 or 3 device does not have an Energy Absorber fitted, it shall not be used.

4.3.3 General Requirements when using Fall Arrest Systems

To minimize the risks associated with FAS, the following shall apply:

- a) Anchorage points shall be near to vertical as possible above the person and in no case outside of 15°, and shall be capable of withstanding a force of 5000 pounds (22kN),
- b) The location of the Anchorage Point shall be reviewed for obstructions in the potential fall path of the person. Selection of Anchorage Points shall minimize the potential for injury from striking objects due to swinging,
- c) Personal Fall Arrest Systems shall be rigged such that an employee cannot contact any lower level,
- d) Fall clearance distances shall be calculated for the type of lanyard or self-retracting system being used. As a general rule, systems using a six foot (1.8 meter) lanyard need 18½ feet (5.6 meter) of clearance. When using conventional self-retracting systems, 15½ feet (4.7 meters) of clearance is required. Systems are available for shorter clearance distances and shall be identified for distances less than 15.5 feet (4.7 meters),
- e) See Attachment D, Clearance Calculation for an example of calculated fall clearance distances. In determining fall clearance distance, consider the length of the anchorage connector, length of the lanyard, deceleration distance, the height of the worker, plus a safety factor of three feet (1 meter),
- f) For retractable lifelines, also consider the free fall distance,
- g) Lanyards shall not be used with self-retracting lifelines,
- h) Full Body Harnesses shall be equipped with a Suspension Trauma Relief Device. As the Suspension Trauma Device is not part of the active Fall Arrest System, the device does not have to be of the same manufacture as the rest of the system,
- i) The manufacturer's recommendation for Personal Fall Arrest Systems care, maintenance, storage and service life replacement shall be followed,
- j) A Competent Person shall verify the installation of vertical and horizontal life lines and other temporary anchor points,
- k) Personnel shall be trained in the use of the specific Personal Fall Arrest equipment utilized, before use.

4.4 EQUIPMENT INSPECTION

Fall protection PPE shall be inspected before and after each use by the user and prior to issue by a competent person. Additionally, monthly inspections shall be performed by a competent person trained in inspection procedures, a log/register maintained by each contractor and or each QatarEnergy-IS department with ownership of fall protection equipment and inspection details documented. The log/register as a minimum shall detail make, model, manufacturer, year of manufacture, identification number, issued for service date, inspection date, condition and inspected by.

Fall protection PPE shall be certified every six months by a third party and certificates documented and available at the worksite. Fall protection PPE shall be certified and colour coded in line with the Lifting Colour Code Schedule detailed in QatarEnergy-IS Lifting Equipment

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048 REV. 01
---	--

Control & Operations Procedure (IS-HSE-PRC-027) and QP Standard for Lifting Equipment and Operations (QP-PAI-STD-005).

Defective equipment shall be removed from service. Defective soft goods (including but not limited to harnesses, lanyards, and lifelines) shall be destroyed. Hard goods such as self-retracting lifelines/inertial reels may be repaired by the manufacturer's authorized agent using only the original manufacturer's parts.

Equipment that has been exposed to a dynamic load of a fall shall be immediately removed from service and destroyed.

4.5 Audits

The SM shall ensure where work activities include the use of fall protection equipment in addition to the standard ISSOW audit the following items shall be confirmed during worksite audit – Appendix F (IS-HSE-PRC-048-002) to verify compliance with this procedure:

- Anchor points have been identified
- Rescue Plan Appendix E (IS-HSE-PRC-048-001) is available
- Fall protection PPE is certified, colour coded and inspected prior to use
- Personnel have been trained in the use of the fall protection PPE.

The SM shall ensure equipment inspection requirements are verified at each location via audit of the contractor and or each department with ownership of fall protection equipment at least quarterly by a designated QatarEnergy-IS representative. The following items shall be confirmed to verify compliance with this procedure:

- Equipment register is available and complete
- Competent person is performing monthly inspections
- Equipment is certified (certificates available) and colour coded
- Evidence that non-hard goods i.e Nylon belts and retractable lanyards which are defective are being destroyed
- Evidence that equipment exposed to dynamic load has been destroyed
- Soft goods are removed from service five years from manufacturing date.

4.6 FALL PROTECTION SYSTEMS

4.6.1 Engineered Platforms

Platforms, four (4) feet or more above the level, shall have guardrails (nominal height 42 in or 106 cm), mid rails (nominal height 21 in or 53 cm) and toe-board (4 in or 10 cm in height).

Penetrations or holes in platforms are to be fitted with a cover capable of withstanding 440 lbs. (200 kg) or fenced with a properly-constructed edge protection system having a guardrail, mid-rail and toe-board. The edge protection shall be capable of withstanding a force of 200 lbs (91 kg).

4.6.2 Scaffolds

QatarEnergy-IS scaffolding requirements are detailed in Scaffolding procedure (IS-FOP-PRC-216).

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048 REV. 01
---	--

4.6.3 Elevating Work Platforms / Manlifts

Elevating Work Platforms (EWP) may be operated by properly trained persons only, proof of training shall be carried at all times. Verification of training on the specific equipment's use, inspection, and limitations based on the manufacturer's operating manual & recommendations is required prior to approval to operate.

Personnel working in a EWP shall wear a Full Body Harness with a fall prevention lanyard attached to a fixed Anchorage Point within the box. The capacity of the work box / man basket shall be clearly visible and displayed on the EWP.

The EWP shall not be operated within ten (10) Feet of energized overhead power lines.

Unapproved equipment such as forklifts shall not be used as man-lift devices.

Personnel working in a EWP shall not sit or climb on the handrails/edge of the box or use material to gain additional height. Personnel shall ensure that both feet are firmly planted on the floor of the box.

EWP shall be inspected by the Authorized Employee before use. Equipment shall be inspected by a Competent Person prior to each use and documented. Records of inspections shall be maintained at least until the following third party inspection and in no less than twelve months after the third party inspection.

The means of attachment to the forklift shall be designed so that the work box / man basket cannot become inadvertently detached; sole placement on the forks is not sufficient, there shall be a physical connection back to the forklift.

A Work Permit shall be obtained in accordance with the local ISSOW requirements before commencing any activities. Activity shall be properly planned, appropriately supervised and carried out in a safe manner.

Risk assessment to include but not limited to:

- Access to the site – type of ground, inclines and descents, housekeeping at the work
- Height that needs to be achieved
- Overhead obstructions
- Power cables
- Wind speed, weather conditions and plan for deterioration (Stop Work)
- Manufacturer's specified limits
- Hard barriers, safe work zone/exclusion zone
- Banksman requirements.

Operators shall immediately report any problems or malfunctions that become evident during operation, to their supervisor. Any lifts with problems or malfunctions that affect the safety of the operation shall be immediately removed from service, locked and tagged as 'out of service', and repaired, prior to further use.

Where damaged equipment is identified, it shall be immediately removed from service, tagged and replaced or repaired by a Competent Person before returning it to service. Maintenance shall be carried out according to the manufacturer's requirements and records maintained in an equipment log.

4.6.4 Personnel Transfer / Work Baskets

Man riding, lifting equipment inspection and design requirements are covered in QatarEnergy-IS Lifting Equipment Control and Operations procedure (IS-HSE-PRC-027) and QP Standard for Lifting Equipment and Operations (QP-PAI-STD-005).

Man riding shall be classified as a complex lift and subject to the necessary ISSOW controls.

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048 REV. 01
---	--

Personnel transfer shall comply with the QatarEnergy-IS requirements and safe work practices applicable to Transfer of Personnel Via Personnel Transfer Basket or Other Approved Devices at Offshore Facilities.

When working over water in a fully compliant work basket, fall prevention equipment shall not be used. A life jacket shall be worn at all times.

4.6.5 Ladders

The use of portable ladders is permitted only when no other options is available. Two types of ladders are used in QatarEnergy-IS operations – portable (extension and step) and fixed.

4.6.5.1 Temporary / Portable Ladders:

- The maximum working height shall be no greater than twenty (20) feet (six meters).
- Ladders shall be inspected for damage before and after use by the worker. A ladder register shall be maintained at each location.
- If a ladder is found to be damaged it shall not be used. Defective ladders shall be removed from service and tagged or destroyed.
- Portable ladders are to be made of non-conductive materials. Portable ladders for use in Zone 1 classified areas or near to energized electrical equipment shall be non- conductive excluding metallic, metallic blended or wood.
- Ladders shall not be set up on scaffolds or other fall prevention systems to gain extra working height.
- Both step and extension ladders shall be equipped with safety feet.
- Portable ladders shall be “industrial type 1” (2.5 cm) ladders with the minimum rated working load of 250 pounds (114 kg).
- Extension ladders shall be set at the correct angle of 4:1 (vertical to horizontal).
- The top of the extension ladder shall be positioned a minimum of three (3) feet over the leading edge when the ladder is used to access a higher level.
- Ladders shall be tied with a minimum of a half (½) inch (twelve mm) rope to prevent slipping. Another person shall foot the ladder until it is tied off.
- Step ladders shall only be used in the fully open position and shall not be used as straight or extension ladders.
- Step ladders shall only be set up and used on firm level ground. The top step shall not be utilized.
- When a ladder is to be used where a potential fall hazard over a handrail or man overboard potential exists, the activity shall be risk assessed to include additional controls such as guard protection, fall protection PPE and life saving devices.

4.6.5.2 Fixed Ladders:

- If a fixed ladder is to be used for performing work at height above six (6) feet (1.8) meters, a fall arrest system shall be used.
- Fixed ladders shall not have a working height greater than twenty (20) feet (six meters) unless a rest platform is provided every thirty (30) feet (nine meters) or a Fall Arrest System shall be used.
- If the ladder is built with a cage, the bottom of the cage shall be between seven (7) feet (2.1 meters) and eight (8) feet (2.8 meters) above the base of the ladder.

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048 REV. 01
---	--

- Caged ladders shall not exceed thirty (30) feet (nine meters) in height.

4.7 RESCUE PROCEDURES

Where a worker using personal fall arrest equipment is at risk of suspension trauma, a written rescue plan and sketch Appendix E (IS-HSE-PRC-048-001) similar to a lift plan shall be identified as a pre-requisite as part of the risk assessment. The rescue plan shall be specific to the activity and location and identify suitable means of prompt rescue or self-rescue. The plan shall detail the equipment to be used and the instructions for use, the pre-identified and available anchor points and persons are trained in and available for rescue. The rescue team lead shall visit the worksite and sign off on the rescue plan prior to authorization to start work.

Rescue plans shall be retained for twelve (12) months after the work is completed.

4.7.1 Rescue Team

The rescue team shall be made up of a select group of trained employees, to safely and promptly rescue a fallen person. Training shall include first aid training for dealing with suspension trauma.

4.7.2 Emergency Response

For locations such as Halul Produced Water Handling Facility (PWHF) and Ras Laffan Industrial City (RLIC) where rescue shall be performed by QatarEnergy Emergency Response Team (ERT), before commencing work at height the Site Manager shall inform QatarEnergy ERT of:

- The location of the elevated workplace,
- The types of fall protection being used and,
- The hazards of the environment where the ERT may be called upon to perform a rescue.

The ERT shall confirm its availability and capability, any limitations on the types of rescue it can perform, and detailed instructions regarding how they are to be summoned. The instructions shall state when they need to be advised if certain activities are planned or certain conditions exist so that they may ensure the fastest possible response.

4.7.3 Rope Access (Level 3)

When Rope access is used to facilitate working at height the following minimum requirements shall be met:

- A rescue plan Appendix E (IS-HSE-PRC-048-001) detailing the minimum requirements of this section shall be attached to the appropriate ISSOW work control certificate,
- The minimum team shall consist of three Industrial Rope Access Trade Association (IRATA) trained personnel, one IRATA level 3 supervisor, one IRATA level 2, and one IRATA level 1.
- The IRATA level 3 supervisor shall remain on watch and supervise in preparation for emergency response. The level 3 supervisor is only allowed on the ropes during emergency rescue scenario, training exercise/drill or if an alternative level 3 supervisor has taken the role of supervisor/watch
- The latest IRATA guidelines shall be followed as the minimum requirement for job planning and implementation.

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048 REV. 01
---	--

- Contractor shall provide oversight by an IRATA certified person, knowledgeable of contractor operations, procedures and requirements. All rope access team shall be IRATA certified.
- Risk assessment team shall include representatives from the Contractor, QatarEnergy-IS and rope access crew member(s).

4.8 CONTRACTORS

Contractors who perform high risk activities are audited as defined within QatarEnergy-IS Contractor HSE Program (IS-HSE-PRC-009). Routinely working at height is classified as a high risk activity and as such, contractors shall be audited using QatarEnergy-IS Audit procedure (IS-FOP-PRC-700) requirements with a focus on compliance with this procedure.

5.0 REFERENCES TO OTHER DOCUMENTS

Document Title	Document Number	Internal/External Document (if any)	Document Referencing
HSE Training Procedure	IS-HSE-PRC-002	Internal	Sideward
Contractor Safety Program	IS-HSE-PRC-009	Internal	Sideward
Audit Procedure	IS-FOP-PRC-700	Internal	Sideward
QatarEnergy-IS Lifting Equipment Control & Operations Procedure	IS-HSE-PRC-027	Internal	Sideward
QatarEnergy-IS Scaffolding Procedure	IS-FOP-PRC-216	Internal	Sideward
QP Standard for Lifting Equipment and Operations.	QP-PAI-STD-005	Internal	Sideward
Fall Protection & Arrest Standards	ANSI Z359	External	Sideward

6.0 DEFINITIONS

Term	Definition
Anchorage Point	A secure point of attachment on a structure capable of withstanding 5000 pounds (22kN) to which a Fall Arrest Device, or Lanyard assembly or restraint may be secured. An Anchorage Point includes attachments such as shackles, slings, Anchorage Point lines or specially designed fittings.
Barricade	A supported structure used to create an exclusion zone to prevent people from entering.
Competent Person	A person who has acquired through a combination of training, education and experience, the knowledge and skills to enable that person to correctly perform a specified task. A Competent Person also includes a company or firm licensed by the Authority to issue test certificates. An individual designated by the employer to be responsible for the immediate supervision, implementation, and monitoring of the employer's managed fall protection

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048 REV. 01
---	--

Term	Definition
	program who, through training and knowledge, is capable of identifying, evaluating, and addressing existing and potential fall hazards, and who has the employer's authority to take prompt corrective action with regard to such hazards.
Edge Protection	A barrier which is erected around the edge of a building or structure. It may consist of guard-railing or vertical containment sheeting
Elevating Work Platform / Manlifts	A mobile platform that can be manually or power operated and has the capability of lifting a person to height. Types of Elevating Work Platforms include scissor lifts, booms, telescopic lifts and articulated platforms.
Energy Absorber	A component whose primary function is to dissipate energy and limit deceleration forces imposed on the body during fall arrest.
Fall Arrest Device	A self-locking device whose function is to arrest a fall.
Fall Arrest System	A system designed to arrest a free fall. It consists of the following items: an Anchorage Point, a Lanyard, a Full Body Harness and a Fall Arrest Device.
Fall Prevention System	A combination of anchorage, anchorage connector, lanyard (or other means of connection), and body support that limits travel in such a manner that the user is not exposed to a fall hazard.
Fixed Scaffold	Temporary elevated platform and it's supporting structure used for supporting employees or materials or both.
Full Body Harness	A design of straps which may be secured about the employee in a manner to distribute the fall arrest forces over, at least, the thighs, pelvis, waist, chest and shoulders with means for attaching it, to other components of a personal Fall Arrest or Fall Prevention System.
Lanyard	A component consisting of a flexible rope, wire rope, or strap, which typically has a connector at each end for connecting to the body support and to a fall arrester, energy absorber, anchorage connector, or anchorage.
Platform	A permanent or temporary surface for persons to carry out work.
Work Basket	An approved Platform surrounded by an Edge Protection system designed to be suspended from a crane or elevated by other mobile equipment.

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048 REV. 01
---	--

APPENDIX

APPENDIX A - REVISION HISTORY LOG

Revision Number: 01


Date: 30/10/2021

Item Revised	Revision Description	Page No.
All	Revised format based on new Management system documentation.	
Remarks :		


APPENDIX B - LIST OF ABBREVIATIONS

Abbreviation	Description
ERT	Emergency Response Team
EWP	Elevated Work Platform
FAS	Fall Arrest System
FPS	Fall Prevention System
Halul PWHF	Halul Produced Water Handling Facility
QatarEnergy-IS	QatarEnergy Idd El- Shargi Asset
SHD	Section Head
ISSoW	Integrated Safe System of Work
IRATA	Industrial Rope Access Trade Association
PPE	Personal Protective Equipment
PTW	Permit to Work
RA	Risk Assessment
RLIC	Ras Laffan Industrial City
SM	Site Manager : OIS (Offshore Installation Supervisor) / WHMS (Wellhead Maintenance Supervisor / QatarEnergy-IS REP (QatarEnergy-IS Representative at site) / ODS (Offshore Drilling Supervisor) / SHD (Section Head)

APPENDIX C: ELIMINATING & CONTROLLING FALL HAZARDS

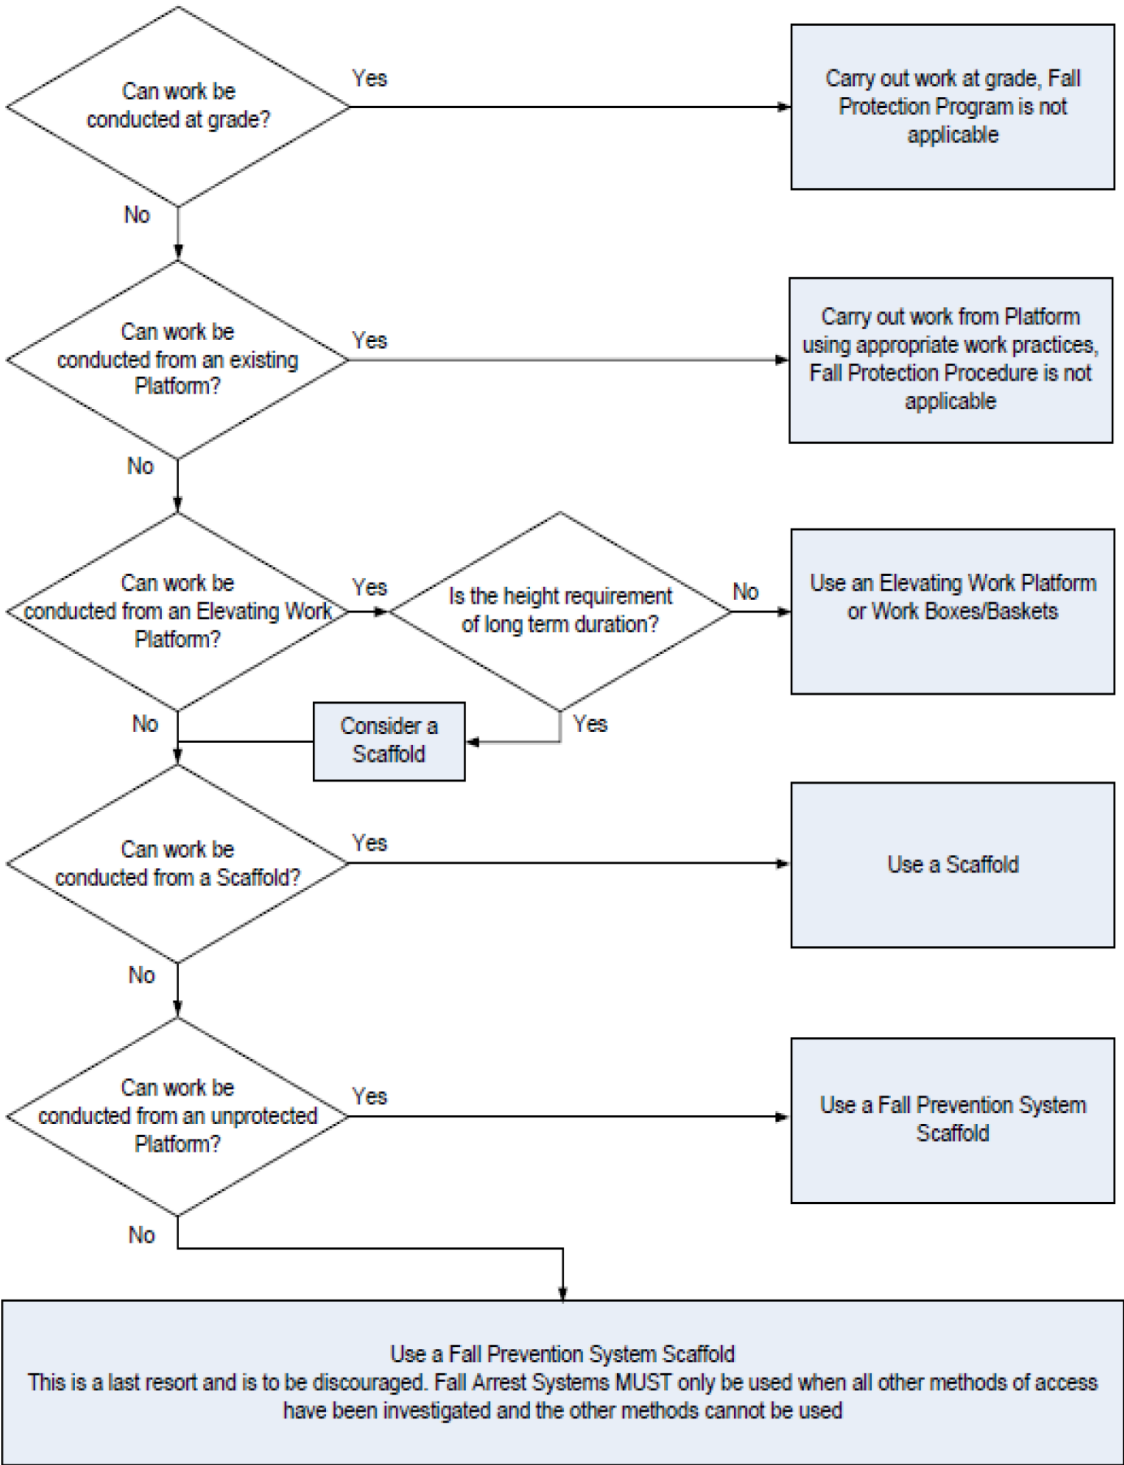

APPENDIX D : CLEARANCE CALCULATION EXAMPLE

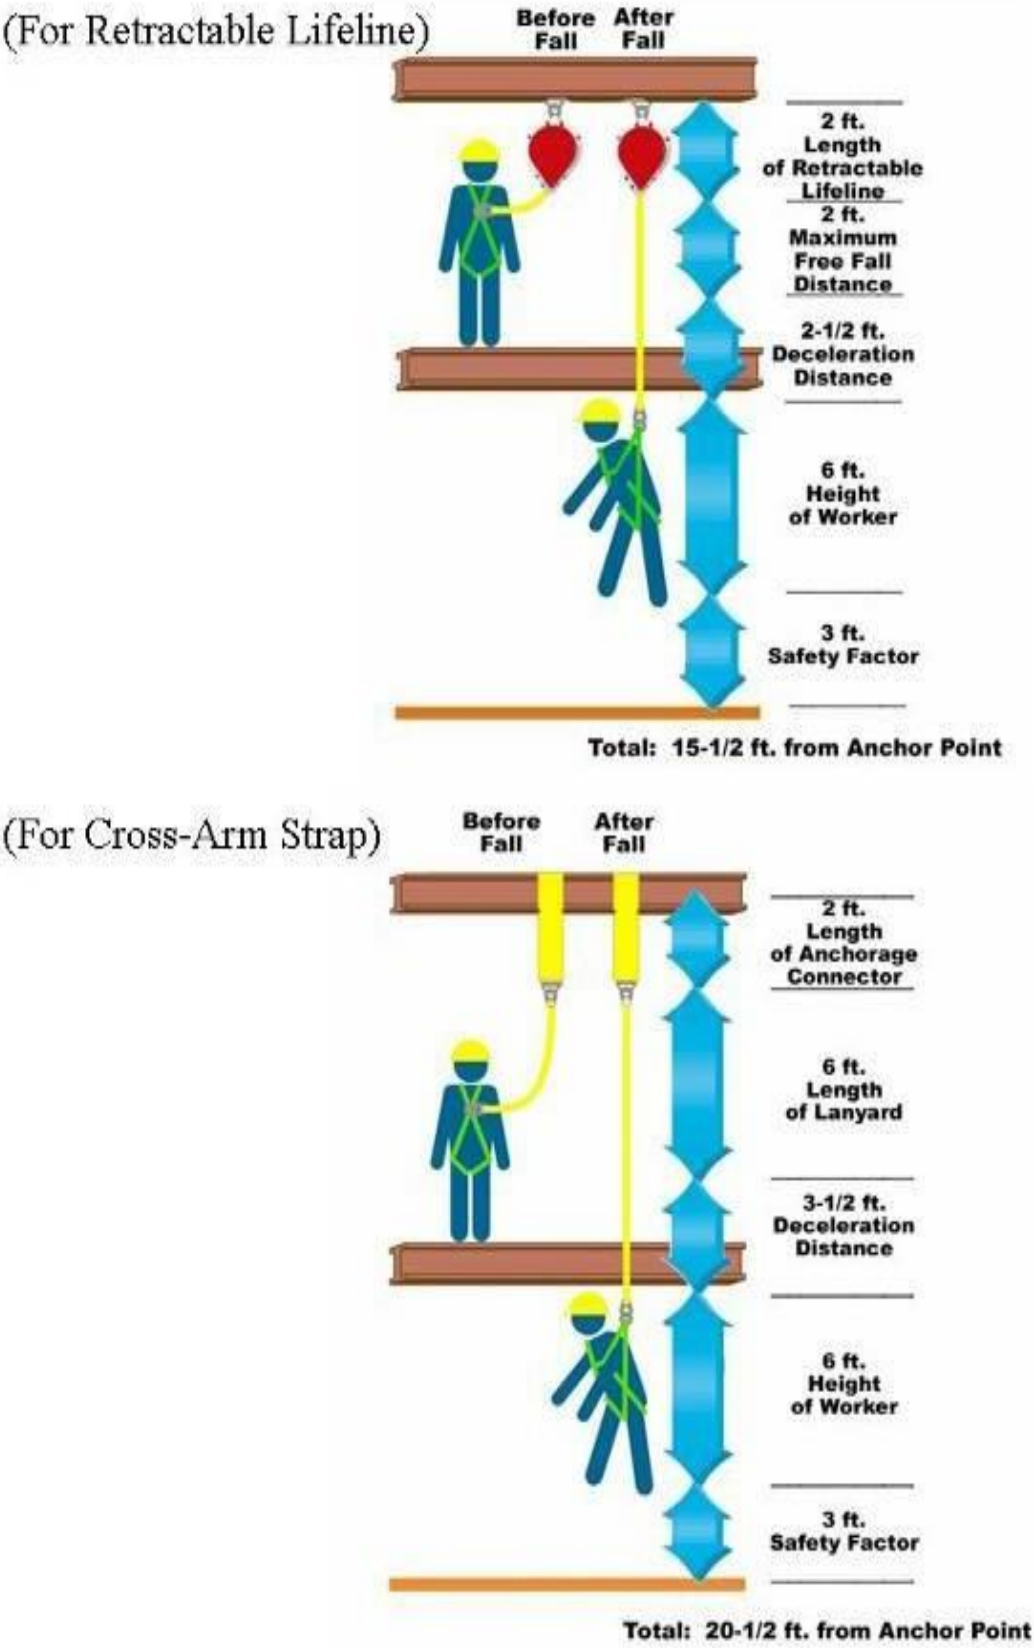

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048	REV. 01
---	--	----------------

APPENDIX E: RESCUE PLAN (IS-HSE-PRC-048-001)

Facility:	Location:	Date:
Activity/Rescue Scenario:		
Person In Charge (Competent person only):		

The rescue of personnel working at elevated levels shall be discussed and planned for during the **THINK** planning process for the relevant task. As a minimum, the following shall be considered during discussion and planning:

- Equipment and personnel required to perform rescue operations
- Length of time required to perform rescue operations
- Forces exerted on personnel from being suspended for that length of time (Suspension Trauma)
- Availability of alternative methods to perform rescue operations

Key Considerations	
Considered the following and include where appropriate when formulating the plan:	
Area of Operation – isolation, complexity, access, hazards to rescuers?	
Equipment – type, quantity, availability/location, suitability, special requirements?	
Personnel – training/competence, availability, response time, and incident management?	
Communications – methods, equipment, possible barriers?	

Equipment	✓	Required Personnel	✓
Estimated Recovery Time (Minutes) (Y/N)		Potential Suspension Trauma (Y/N)	

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048	REV. 01
---	---	---------

The Plan
Description / Method:

Drawings / Photographs

HSE-048-001

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048	REV. 01
---	--	----------------

APPENDIX F: FALL PROTECTION AUDIT (IS-HSE-PRC-048-002)

Location of Work:		PTW / ISSoW Number:	
Description of Scope of Work:			
General:		N/A	Yes
Is working at height absolutely necessary?	☐	☐	☐
Is the chosen method of access the safest option available?	☐	☐	☐
Has the work been planned so that everyone involved knows exactly the work scope?	☐	☐	☐
Has the area been cordoned off to restrict access?	☐	☐	☐
Are dropped objects addressed?	☐	☐	☐
All of the following questions SHALL be answered YES to proceed:		Yes	No
Do you have a Working at Height Rescue Plan (HSE-048-001) in place?		☐	☐
Have you completed a Risk Assessment?		☐	☐
Have the personnel been trained and deemed competent for working at height?		☐	☐
Have the weather conditions been considered?		☐	☐
List of equipment to be used:			
Fall Protection / Fall Arrest Equipment (Harness, etc)			
If a fall system is in use, is there adequate clearance distance below?	☐	☐	☐
Is a dual lanyard system required and in place to ensure 100% attachment at all times?	☐	☐	☐
Is the anchor point identified, suitably located and rated for 22kN / 5000lbs?	☐	☐	☐
Has the work method included a safe means of egress / access to the work location?	☐	☐	☐
Consideration given to Pendulum swing? (Self-Retracting lifeline inside 30° working arch)	☐	☐	☐
Controls Checklist	N/A	Yes	No
Inspect the equipment to ensure its condition, are there any issues?	☐	☐	☐
Has the equipment to be used been certified and colour coded?	☐	☐	☐
Is a chin strap on the hard hat fitted and used during this task?	☐	☐	☐
Is it the correct type of ladder for this task? (fiberglass/electrical, extension, step ladder, etc)	☐	☐	☐
Comments / Action Items:			

	QatarEnergy-IS FALL PROTECTION PROCEDURE DOC NO: IS-HSE-PRC-048	REV. 01
---	--	----------------

Prepared By:		
Print Name / Job Title	Signature	Date (DD-MMM-YY)