

BALLISTIC MISSILE TECHNICAL REFERENCE GUIDE

Structural Anatomy, Component Visual Profiles, and Technical Specifications for Selected Chinese (PLARF) and Pakistani (ASFC) Missile Systems

DOCUMENT TYPE: Technical Intelligence Reference Sheet | COVERAGE: 16 Ballistic Missile Platforms | FORMAT: Visual Schematic & Component Chart

1. UNIVERSAL BALLISTIC MISSILE STRUCTURAL ANATOMY

Standard Staging & Structural Component Architecture (Top to Bottom):

1. Reentry Vehicle (RV) / Payload

Houses the nuclear, high-explosive conventional, or submunition warhead. Advanced systems utilize Maneuverable Reentry Vehicles (MaRVs), Hypersonic Glide Vehicles (HGVs), or Multiple Independently Targetable Reentry Vehicles (MIRVs) with thermal heat shields.
2. Guidance, Nav & Control (GNC)

Located below or integrated into the warhead bus. Contains Ring Laser Gyro Inertial Navigation Systems (INS), satellite receivers (BeiDou/GPS), optical/radar terminal seekers, and flight control computers.
3. Interstage & Staging Joint

Structural ring connecting propulsion stages. Contains pyrotechnic explosive bolts, pneumatic pushers, or cold-gas separation nozzles to cleanly jettison spent booster stages.
4. Upper Stage Motor (Stage 2/3)

High-altitude solid or liquid rocket engine providing velocity corrections and final orbital insertion thrust prior to payload deployment.
5. Main Booster Stage (Stage 1)

Large-diameter primary rocket motor casing filled with solid propellant grain (HTPB composite) or liquid propellant tanks (fuel + oxidizer), generating initial boost thrust.
6. Base Steering & Thrust Control


Base assembly housing flexible Thrust Vector Control (TVC) gimbaled nozzles, graphite jet vanes in the exhaust stream, or external aerodynamic control tail fins.

2. DETAILED BALLISTIC MISSILE TECHNICAL PROFILES

DF-11 / CSS-7 (DongFeng 11)

CHINA (PLARF)

DF11 SCHEMATIC ANATOMY

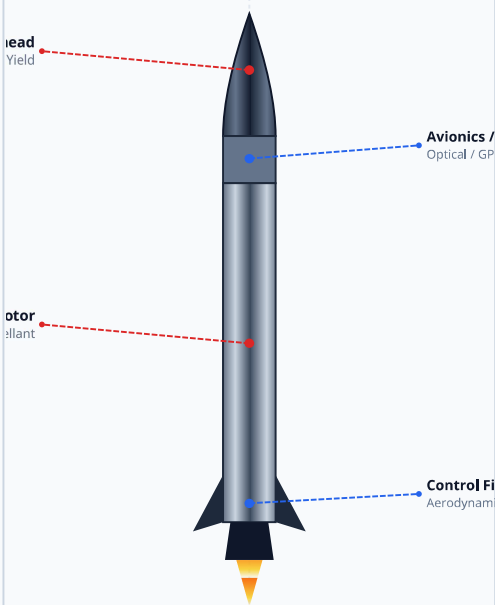


System Class	Short-Range Ballistic Missile (SRBM)
Operational Range	300 - 600 km
Payload Capacity	500 - 800 kg (HE, Cluster, Low-Yield Nuclear)
Guidance System	Inertial Navigation System (INS) + Optical / Satellite Correction
Propulsion Stage	Single-Stage Solid Rocket Motor
Launch Platform	8x8 Transporter Erector Launcher (TEL)

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Nose Cone / Warhead	Detachable warhead casing housing high-explosive or submunition payload.
Guidance Bay	Miniaturized INS with ring laser gyros and optional optical terminal sensor.
Motor Casing	Steel / composite motor casing filled with solid HTPB propellant grain.
Control Tail	Four baseline aerodynamic fins + jet vanes for boost-phase steering.

Key Operational Capability: Fast response time due to solid fuel; detachable warhead reduces radar cross-section and increases impact velocity.

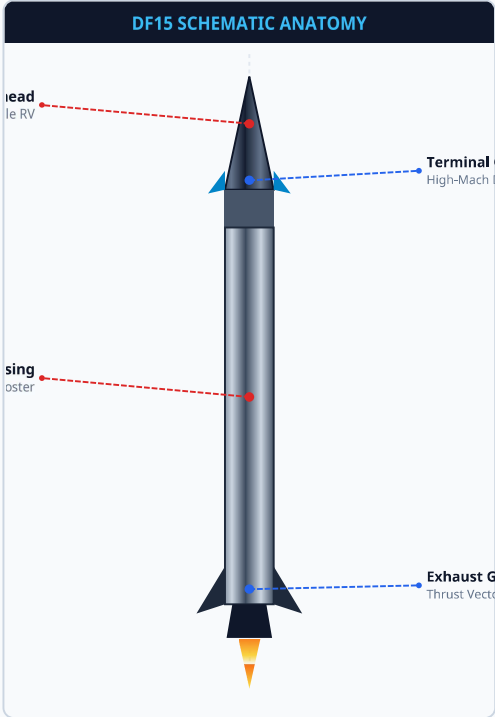


System Class	Short-Range Ballistic Missile (SRBM)
Operational Range	600 - 850 km
Payload Capacity	500 - 750 kg (Conventional HE, Penetration, Nuclear)
Guidance System	INS + Satellite Navigation (BeiDou) + Active Radar Terminal Seeker
Propulsion Stage	Single-Stage Solid Rocket Motor
Launch Platform	8x8 Road-Mobile TEL

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Ogival Warhead	Aerodynamically contoured terminal maneuvering reentry vehicle (MaRV).
Terminal Actuators	Small maneuvering fins on the reentry vehicle for trajectory corrections.
Solid Motor Stage	High-thrust single solid propellant motor assembly.
Base Steering	Four tail fins combined with exhaust gas vanes for atmospheric control.

Key Operational Capability: Employs mid-course and terminal maneuvering to defeat point-defense anti-ballistic missile systems.

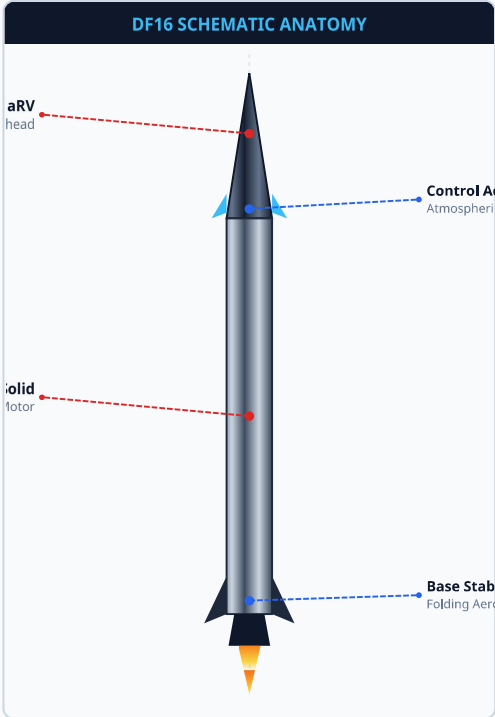

System Class	Medium-Range Ballistic Missile (MRBM)
Operational Range	800 - 1,000 km
Payload Capacity	1,000 - 1,500 kg (Dual-capable HE / Bunker-Busting / Nuclear)
Guidance System	INS + BeiDou + Terminal Control Actuators
Propulsion Stage	Single-Stage Advanced Solid Motor
Launch Platform	10x10 Armored TEL Shell

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Elongated Warhead	High-mass warhead optimized for deep bunker penetration and runway destruction.
Control Actuators	High-speed aerodynamic fins mounted at the base of the reentry body.
Composite Motor Case	Filament-wound carbon composite motor casing for enhanced mass fraction.
Protected Base	Encapsulated engine nozzle with thrust vectoring capability.

Key Operational Capability: Fills the strategic range gap between DF-15 and DF-21; features high precision and penetration capabilities.

DF-21 / CSS-5 (DongFeng 21)

CHINA (PLARF)

DF21 SCHEMATIC ANATOMY

The diagram illustrates the DF-21 missile's structure. It features a conical reentry vehicle at the tip, followed by an interstage ring, a solid-fuel upper stage, and a solid-fuel booster at the base. Labels with dashed lines point to these components: 'Reentry Vehicle' (nose), 'Interstage Ring' (joint), 'Stage 2 Motor' (upper stage), and 'Stage 1 Booster' (lower stage).

System Class	Medium-Range Ballistic Missile (MRBM)
Operational Range	1,700 - 2,150 km
Payload Capacity	500 - 2,000 kg (Single 200-500 kt Nuclear or HE)
Guidance System	Inertial Guidance with Digital Satellite Positioning
Propulsion Stage	Two-Stage Solid Propellant Motor
Launch Platform	12x12 Off-Road TEL

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Reentry Vehicle	Heat-shielded conic RV designed for stable atmospheric entry.
Stage 2 Motor	Solid-fuel upper stage providing final velocity push.
Interstage Ring	Pyrotechnic separation joint connecting upper and lower stages.
Stage 1 Booster	Heavy solid rocket motor providing initial boost trajectory.

Key Operational Capability: China's first land-based mobile solid-fuel nuclear missile; baseline for anti-ship and antisatellite variants.

DF-21D (Anti-Ship Ballistic Missile - ASBM)

CHINA (PLARF)

DF21D SCHEMATIC ANATOMY

The diagram illustrates the DF-21D missile's structure. It features a biconic maneuverable reentry vehicle (MaRV) at the tip, followed by an interstage ring, a solid-fuel upper stage, and a solid-fuel booster at the base. Labels with dashed lines point to these components: 'Biconic MaRV' (nose), 'Interstage Ring' (joint), 'Stage 2 Motor' (upper stage), and 'Stage 1 Booster' (lower stage).

System Class	Anti-Ship Medium-Range Ballistic Missile (ASBM)
Operational Range	1,500 - 2,000 km
Payload Capacity	Armor-Piercing High Explosive or Submunitions
Guidance System	INS + BeiDou + Active Synthetic Aperture Radar (SAR) / Optical Seeker
Propulsion Stage	Two-Stage Solid Fuel Motor
Launch Platform	12x12 Road-Mobile TEL


PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Biconic MaRV	Maneuverable Reentry Vehicle with radar window transparent nose cone.
Terminal Seeker	Active SAR radar and optical sensors for tracking moving naval surface units.
Attitude Control	Reaction Control System (RCS) thrusters for exo-atmospheric positioning.
Booster Assembly	Two-stage solid motor providing rapid hypersonic climb.

Key Operational Capability: World's first operational anti-ship ballistic missile; specifically designed to target aircraft carriers.

DF-17 (Hypersonic Glide Vehicle System)

CHINA (PLARF)

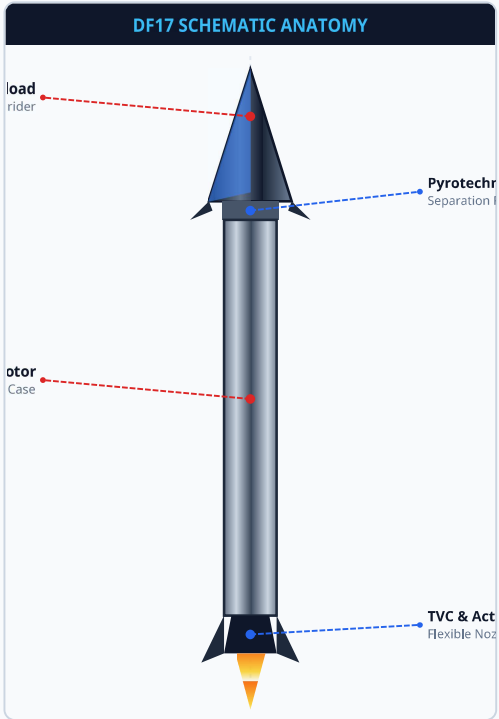

System Class	Medium-Range Hypersonic Glide Missile
Operational Range	1,800 - 2,500 km
Payload Capacity	DF-ZF Hypersonic Glide Vehicle (Conventional / Nuclear)
Guidance System	INS + Satellite + Hypersonic Aerodynamic Surface Controls
Propulsion Stage	Solid Rocket Booster + Hypersonic Glider
Launch Platform	5-Axle Wheel Mobile TEL


PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
DF-ZF Waverider	Sharp-edged wedge-shaped glide body providing high lift-to-drag ratio at Mach 5-10.
Thermal Shielding	Ultra-high temperature carbon-carbon composite thermal protection system.
Control Elevons	Trailing-edge control surfaces for high-G maneuvering in upper atmosphere.
Booster Stage	Adapted solid-fuel rocket booster accelerating glider to separation altitude.

Key Operational Capability: Flies at low-altitude un-ballistic trajectories (skip-glide), making radar tracking and interception extremely difficult.

DF-26 (Intermediate-Range Ballistic Missile)

CHINA (PLARF)

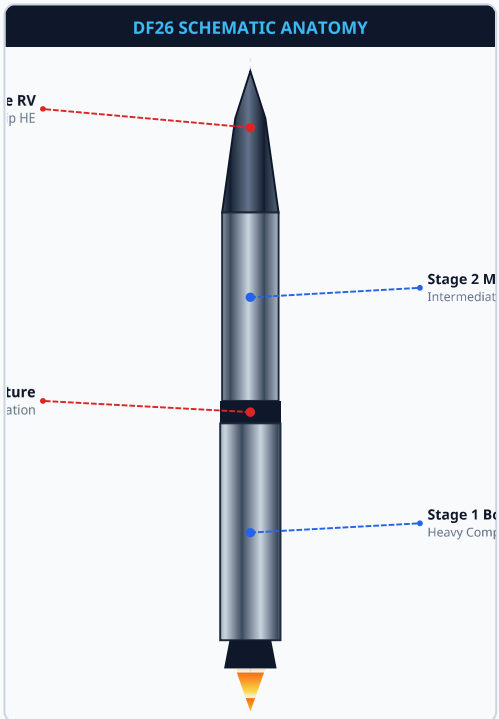

System Class	Intermediate-Range Ballistic Missile (IRBM / ASBM)
Operational Range	4,000 - 5,000 km
Payload Capacity	1,200 - 1,800 kg (Modular: Nuclear, HE, or Anti-Ship)
Guidance System	High-Precision INS + BeiDou + Terminal Seeker
Propulsion Stage	Two-Stage Solid Rocket Motor
Launch Platform	12x12 Off-Road Heavy TEL

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Modular Nose Section	Interchangeable warhead housing allowing rapid operational nuclear/conventional swap.
Stage 2 Engine	Solid propellant upper stage optimized for intermediate-altitude ignition.
Cold Staging Ring	Separation mechanism utilizing gas generators for clean stage jettison.
Stage 1 Engine	High-thrust primary booster providing deep regional reach.

Key Operational Capability: Dubbed the 'Guam Express'; capable of striking critical naval bases and large moving capital ships.

DF-31 / DF-31AG (DongFeng 31 Series)

CHINA (PLARF)

DF31 SCHEMATIC ANATOMY

The diagram illustrates the DF-31 missile's anatomy. It is a three-stage solid-fuel rocket. The nose section is labeled 'RV / Bus'. The first stage is labeled 'Stage 1 Motor (Intercontinental)'. The second stage is labeled 'Stage 2 Motor (Mid-Stage)'. The third stage is labeled 'Stage 3 Motor (Post-Boost)'. The nose cone is labeled 'RV / Bus'.

System Class	Intercontinental Ballistic Missile (ICBM)
Operational Range	8,000 - 11,200 km
Payload Capacity	1,000 - 1,700 kg (Single 1 Mt Nuclear or 3-5 MIRVs)
Guidance System	Stellar-Inertial Navigation + BeiDou Updates
Propulsion Stage	Three-Stage Solid Fuel Rocket Engine
Launch Platform	Silo / 8-Axle Semi-Trailer TEL (DF-31AG)

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Nuclear RV Shroud	Ablative composite nose shroud protecting single or multiple nuclear reentry bodies.
Stage 3 Upper Stage	Compact solid motor responsible for final insertion into orbital trajectory.
Stage 2 Mid-Stage	Intermediate solid rocket motor casing with lightweight composite construction.
Stage 1 Base Booster	Large diameter primary stage motor delivering intercontinental lift-off thrust.

Key Operational Capability: China's baseline land-mobile ICBM; DF-31AG variant features off-road unpaved mobility.

DF-41 (Heavy Intercontinental Ballistic Missile)

CHINA (PLARF)

DF41 SCHEMATIC ANATOMY

The diagram illustrates the DF-41 missile's anatomy. It is a three-stage solid-fuel rocket. The nose section is labeled 'Bus'. The first stage is labeled 'Stage 1 Motor (Global Reach)'. The second stage is labeled 'Stage 2 Motor (Mid-Stage)'. The third stage is labeled 'Stage 3 Motor (Precision In)'. The nose cone is labeled 'Bus'.

System Class	Heavy Road-Mobile ICBM
Operational Range	12,000 - 15,000 km
Payload Capacity	Up to 10 MIRVs + Decoys & Penetration Aids
Guidance System	Stellar-Inertial Guidance + High-Precision Satellite Positioning
Propulsion Stage	Three-Stage Solid Propellant Motor
Launch Platform	16x16 Heavy Off-Road All-Wheel TEL

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
MIRV Dispenser Bus	Post-boost control vehicle capable of deploying up to 10 independently targeted warheads.
Penetration Aids	Inflatable decoys and chaff dispensers designed to saturate missile defense radars.
Carbon Composite Stages	Filament-wound carbon-fiber motor casings across all three solid stages.
TVC Nozzles	Multi-axis vectoring nozzles for precise trajectory shaping during boost phase.

Key Operational Capability: Pinnacle of Chinese nuclear triad; global reach capable of targeting any location in North America/Europe.

Hatf-IX / Nasr

PAKISTAN (ASFC)

NASR SCHEMATIC ANATOMY

System Class	Tactical / Sub-Strategic Ballistic Missile
Operational Range	60 - 90 km
Payload Capacity	Sub-Kiloton Low-Yield Tactical Nuclear or HE
Guidance System	In-Flight Flight Control System + High-Precision INS
Propulsion Stage	Single-Stage Solid Rocket Motor
Launch Platform	4-Cell Box Launcher (8x8 TEL)

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Tactical Nose Cone	Miniaturized low-yield tactical nuclear warhead payload section.
Flight Controller	Digital flight control computer executing evasive maneuvers during launch.
Solid Motor Grain	Fast-burning solid propellant grain for high thrust-to-weight acceleration.
Box-Launch Fins	Folding tail fins that deploy upon exiting the quad-canister container.

Key Operational Capability: Designed for shoot-and-scoot battlefield deployment to counter enemy armored breakthroughs.

Hatf-II / Abdali

PAKISTAN (ASFC)

ABDALI SCHEMATIC ANATOMY

System Class	Short-Range Ballistic Missile (SRBM)
Operational Range	180 - 200 km
Payload Capacity	250 - 500 kg (Conventional HE or Nuclear)
Guidance System	Inertial Navigation System (INS)
Propulsion Stage	Single-Stage Solid Rocket Motor
Launch Platform	Road-Mobile TEL

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Payload Section	Compact warhead bay capable of carrying high explosive or nuclear payloads.
Avionics Deck	Inertial reference unit and pneumatic actuator power units.
Solid Motor Body	Steel casing single-stage solid propellant rocket motor.
Tail Stabilizers	Fixed and movable aerodynamic control fins at rocket base.

Key Operational Capability: Provides army corps commanders with rapid operational artillery support capability.

DEFENSE TECHNICAL REFERENCE MANUAL • STRATEGIC MISSILE SYSTEMS

Page 6 of 10

Hatf-IV / Shaheen-I / Shaheen-1A

PAKISTAN (ASFC)

SHAHEEN1 SCHEMATIC ANATOMY

System Class	Short-Range Ballistic Missile (SRBM)
Operational Range	750 - 900 km
Payload Capacity	700 - 1,000 kg (HE / Nuclear)
Guidance System	INS with Post-Separation Terminal Guidance
Propulsion Stage	Single-Stage Solid Fuel Motor
Launch Platform	2-Axle Mobile TEL Trailer

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Detachable Warhead	Separator warhead cone with thermal protective coating.
Terminal Actuators	Four control surfaces on warhead base for terminal maneuvering.
Solid Fuel Motor	Single-stage solid rocket motor with composite propellant.
Base Fins	Four large aerodynamic delta fins for boost-phase stability.

Key Operational Capability: High responsiveness and accuracy; updated 1A version features extended range and revised fins.

GHOURI1 SCHEMATIC ANATOMY

System Class	Medium-Range Ballistic Missile (MRBM)
Operational Range	1,250 - 1,500 km
Payload Capacity	700 - 1,200 kg (Conventional HE or Nuclear)
Guidance System	Inertial Navigation System (INS)
Propulsion Stage	Single-Stage Liquid Fuel Rocket Engine
Launch Platform	Road-Mobile TEL Transporter

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Nose Cone Warhead	Heavy single nuclear/HE warhead section at missile peak.
Fuel Tank (TM-185)	Internal storage tank holding hydrocarbon fuel mixture.
Oxidizer Tank (AK-27)	Storage tank holding nitric acid based oxidizer.
Graphite Jet Vanes	Exhaust-stream jet vanes for thrust vector steering during engine burn.

Key Operational Capability: Liquid-fueled missile architecture (derived from Nodong design); utilizes jet vane thrust vectoring.

Hatf-VI / Shaheen-II

PAKISTAN (ASFC)

SHAHEEN2 SCHEMATIC ANATOMY

Warhead

Structure

Ring

Stage 2 Motor

Solid Fuel U

Stage 1 Booster

Heavy Solid

System Class	Medium-Range Ballistic Missile (MRBM)
Operational Range	1,500 - 2,000 km
Payload Capacity	1,000 - 1,500 kg (Nuclear or Conventional)
Guidance System	INS + Satellite Navigation (GPS/BeiDou Updates)
Propulsion Stage	Two-Stage Solid Propellant Motor
Launch Platform	12x12 Heavy Mobile TEL

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Triconic Warhead	Reduced-drag separable warhead with post-separation guidance.
Stage 2 Upper Motor	Solid propellant motor stage for exo-atmospheric acceleration.
Interstage Structure	Lattice / pyrotechnic separation joint between stages.
Stage 1 Primary Motor	Large diameter solid propellant booster motor.

Key Operational Capability: Major performance upgrade over Shaheen-I; solid-fueled two-stage system mounted on heavy TEL.

Shaheen-III

PAKISTAN (ASFC)

SHAHEEN3 SCHEMATIC ANATOMY

Warhead

Structure

Ring

Stage 2 Motor

High-Aspect

Stage 1 Heavy Engine

Flexible TVC

System Class	Medium-Range Ballistic Missile (MRBM)
Operational Range	2,750 km
Payload Capacity	Conventional or Nuclear Warhead Payload
Guidance System	High-Precision INS + Satellite Positioning
Propulsion Stage	Two-Stage Solid Propellant Engine
Launch Platform	8-Axle Off-Road Mobile TEL

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Compact Reentry Vehicle	Heat-resistant warhead cone designed to withstand high re-entry speeds.
Stage 2 Composite Motor	Filament-wound composite motor case with thrust vector control.
Interstage Section	Pneumatic stage release and retro-rocket staging system.
Stage 1 Heavy Engine	High-performance primary stage booster providing extended regional reach.

Key Operational Capability: Pakistan's longest-range missile; designed to reach remote island territories and deep land targets.

DEFENSE TECHNICAL REFERENCE MANUAL • STRATEGIC MISSILE SYSTEMS

Page 8 of 10

ABABEEL SCHEMATIC ANATOMY

The diagram illustrates the Ababeel missile's anatomy. It is a vertical, three-stage solid propellant missile. At the top is the IRV (Independent Reentry Vehicle) Bus, which contains multiple independently targetable reentry vehicles (MIRVs) and decoys. Below this is the Joint System. The missile is divided into two main stages: the Stage 2 Solid Upper Stage and the Stage 1 Solid High-Thrust booster. The Stage 1 booster is the largest and provides the initial ascent energy. The Stage 2 upper stage is responsible for high-altitude solid propellant propulsion. The missile is launched from a Heavy Mobile TEL (Transporter Erector Launcher) Platform.

System Class	MIRV-Capable Medium-Range Ballistic Missile
Operational Range	2,200 km
Payload Capacity	Multiple Independently Targetable Reentry Vehicles (MIRVs) + Decoys
Guidance System	Advanced INS + Satellite Navigation for MIRV Bus Dispenser
Propulsion Stage	Three-Stage Solid Propellant System
Launch Platform	Heavy Mobile TEL Platform

PRIMARY COMPONENT & SUBSYSTEM BREAKDOWN

Subsystem	Technical Description & Function
Bulbous Payload Shroud	Enlarged payload fairing housing the MIRV dispenser bus and warheads.
MIRV Dispenser Bus	Post-boost vehicle equipped with attitude thrusters to release individual warheads.
Stage 2 Solid Engine	High-altitude solid propellant propulsion stage.
Stage 1 Heavy Booster	Large diameter solid rocket booster providing initial ascent energy.

Key Operational Capability:

First South Asian MIRV-capable missile; engineered to defeat regional anti-ballistic missile defense radars.

3. COMPARATIVE TECHNICAL SPECIFICATIONS MATRIX

Missile System	Country / Force	Class	Range	Fuel / Stages	Guidance Type	Warhead Type
DF11	China (PLARF)	Short-Range Ballistic Missile	300 - 600 km	Single-Stage Solid	Inertial Navigation System (INS)	500 - 800 kg
DF15	China (PLARF)	Short-Range Ballistic Missile	600 - 850 km	Single-Stage Solid	INS	500 - 750 kg
DF16	China (PLARF)	Medium-Range Ballistic Missile	800 - 1,000 km	Single-Stage Advanced Solid Motor	INS	1,000 - 1,500 kg
DF21	China (PLARF)	Medium-Range Ballistic Missile	1,700 - 2,150 km	Two-Stage Solid Propellant Motor	Inertial Guidance with Digital Satellite Positioning	500 - 2,000 kg
DF21D	China (PLARF)	Anti-Ship Medium-Range Ballistic Missile	1,500 - 2,000 km	Two-Stage Solid Fuel Motor	INS	Armor-Piercing High Explosive or Submunitions
DF17	China (PLARF)	Medium-Range Hypersonic Glide Missile	1,800 - 2,500 km	Solid	INS	DF-ZF Hypersonic Glide Vehicle
DF26	China (PLARF)	Intermediate-Range Ballistic Missile	4,000 - 5,000 km	Two-Stage Solid	High-Precision INS	1,200 - 1,800 kg
DF31	China (PLARF)	Intercontinental Ballistic Missile	8,000 - 11,200 km	Three-Stage Solid Fuel	Stellar-Inertial Navigation	1,000 - 1,700 kg
DF41	China (PLARF)	Heavy Road-Mobile ICBM	12,000 - 15,000 km	Three-Stage Solid Propellant Motor	Stellar-Inertial Guidance	Up to 10 MIRVs + Decoys & Penetration Aids
NASR	Pakistan (ASFC)	Tactical / Sub-Strategic Ballistic Missile	60 - 90 km	Single-Stage Solid	In-Flight Flight Control System	Sub-Kiloton Low-Yield Tactical Nuclear or HE
ABDALI	Pakistan (ASFC)	Short-Range Ballistic Missile	180 - 200 km	Single-Stage Solid	Inertial Navigation System (INS)	250 - 500 kg
SHAHEEN1	Pakistan (ASFC)	Short-Range Ballistic Missile	750 - 900 km	Single-Stage Solid Fuel Motor	INS with Post-Separation Terminal Guidance	700 - 1,000 kg
GHAURI1						700 - 1,200 kg

Missile System	Country / Force	Class	Range	Fuel / Stages	Guidance Type	Warhead Type
	Pakistan (ASFC)	Medium-Range Ballistic Missile	1,250 - 1,500 km	Single-Stage Liquid Fuel	Inertial Navigation System (INS)	
SHAHEEN2	Pakistan (ASFC)	Medium-Range Ballistic Missile	1,500 - 2,000 km	Two-Stage Solid Propellant Motor	INS	1,000 - 1,500 kg
SHAHEEN3	Pakistan (ASFC)	Medium-Range Ballistic Missile	2,750 km	Two-Stage Solid Propellant Engine	High-Precision INS	Conventional or Nuclear Warhead Payload
ABABEEL	Pakistan (ASFC)	MIRV-Capable Medium-Range Ballistic Missile	2,200 km	Three-Stage Solid Propellant System	Advanced INS	Multiple Independently Targetable Reentry Vehicles

*** END OF TECHNICAL REFERENCE MANUAL ***