

Vadique Myself

PHYSICS *of* ELASTIC CONTINUA



CONTENTS

| | | |
|------------------|---|-----------|
| <i>Chapter 4</i> | The classical linear elasticity | 1 |
| § 1. | The complete set of equations | 1 |
| § 2. | The uniqueness of the solution in dynamics | 5 |
| § 3. | Hooke's law | 8 |
| § 4. | Hooke's law for an isotropic material | 13 |
| § 5. | Theorems of statics | 14 |
| § 6. | Equations in displacements | 18 |
| § 7. | Concentrated force in an infinite medium | 19 |
| § 8. | Finding displacements by deformations | 20 |
| § 9. | Equations in stresses | 23 |
| § 10. | The principle of the minimum potential energy | 24 |
| § 11. | The principle of the minimum complementary energy | 27 |
| § 12. | Mixed principles of stationarity | 28 |
| § 13. | Antiplane shear | 29 |
| § 14. | The torsion of rods | 30 |
| § 15. | Plane deformation | 31 |
| | List of publications | 32 |

chapter 4

THE CLASSICAL LINEAR ELASTICITY

This chapter is about the geometrically linear model with infinitesimal displacements, where

- ✓ $\mathcal{V} = \overset{\circ}{\mathcal{V}}$, $\rho = \overset{\circ}{\rho}$ — “the equations can be written in the initial configuration” (sometimes it is called “the principle of initial dimensions”),
- ✓ operators $\overset{\circ}{\nabla}$ and ∇ are indistinguishable,
- ✓ operators δ and ∇ commute, thus for example $\delta \nabla \mathbf{u} = \nabla \delta \mathbf{u}$.

§1. The complete set of equations

Equations of the nonlinear elasticity, even in their simplest cases, lead to the mathematically complex problems. Therefore the linear theory of infinitesimal displacements is applied everywhere. This theory’s equations were derived in the first half of the XIXth century by Cauchy, Navier, Lamé, Clapeyron, Poisson, Saint-Venant, George Green and the other scientists.

The complete closed set of equations of the classical linear theory in the direct invariant tensor notation, consisting of

- ✓ the balance of forces (of momentum),
- ✓ the stress–strain relations for a material,
- ✓ displacement $\mathbf{u} \mapsto \boldsymbol{\varepsilon}$ relative deformation,

is

$$\nabla \cdot \boldsymbol{\sigma} + \mathbf{g} = \mathbf{0}, \quad \boldsymbol{\sigma} = \frac{\partial \Pi}{\partial \boldsymbol{\varepsilon}} = {}^4\mathcal{A} \cdot \boldsymbol{\varepsilon}, \quad \boldsymbol{\varepsilon} = \nabla \mathbf{u}^S. \quad (1.1)$$

Here $\boldsymbol{\sigma}$ is the linear stress tensor, \mathbf{g} is the resultant vector of volume loads*, \mathbf{u} is the vector of displacement (the “absolute” displacement

* In linear theory, the “per volume unit” loads $\mathbf{g}d\mathcal{V}$ are used much more often than the “per mass unit” $\mathbf{f}dm$ ones ($\mathbf{g}d\mathcal{V} = \mathbf{f}dm$, $\mathbf{g} = \rho\mathbf{f}$), because $d\mathcal{V} = d\overset{\circ}{\mathcal{V}}$, $\rho d\mathcal{V} = \overset{\circ}{\rho}d\overset{\circ}{\mathcal{V}}$ and $\mathbf{f}dm = \mathbf{f}\overset{\circ}{\rho}d\overset{\circ}{\mathcal{V}} = \mathbf{f}\rho d\mathcal{V} = \mathbf{g}d\mathcal{V}$.

or absolute deformation), $\boldsymbol{\varepsilon}$ is the tensor of infinitesimal relative deformation (relative displacement, or strain^{*}), $\Pi(\boldsymbol{\varepsilon})$ is the potential energy of deformation per volume unit and ${}^4\mathcal{A}$ is the stiffness tensor. The latter is tetravalent with the following symmetry

$${}^4\mathcal{A}_{12\rightleftharpoons34} = {}^4\mathcal{A}, \quad {}^4\mathcal{A}_{1\rightleftharpoons2} = {}^4\mathcal{A}, \quad {}^4\mathcal{A}_{3\rightleftharpoons4} = {}^4\mathcal{A}.$$

But where does all this come from?

The equations (1.1) are exact, they can be derived by varying the equations of the nonlinear theory. Varying from an arbitrary configuration is described in §???. The linear theory is the result of varying from the initial unstressed configuration, when

$$\begin{aligned} \mathbf{F} &= \mathbf{E}, \quad \mathbf{C} = {}^2\mathbf{0}, \quad \delta\mathbf{C} = \nabla\delta\mathbf{r}^S, \\ \boldsymbol{\tau} &= {}^2\mathbf{0}, \quad \delta\boldsymbol{\tau} = \delta\mathbf{T} = \frac{\partial^2\Pi}{\partial\mathbf{C}\partial\mathbf{C}} \cdot\cdot\delta\mathbf{C}, \quad \nabla\cdot\delta\boldsymbol{\tau} + \rho\delta\mathbf{f} = \mathbf{0}. \end{aligned} \quad (1.2)$$

It remains to change

- ✓ $\delta\mathbf{r}$ to \mathbf{u} ,
- ✓ $\delta\mathbf{C}$ to $\boldsymbol{\varepsilon}$,
- ✓ $\delta\boldsymbol{\tau}$ to $\boldsymbol{\sigma}$,
- ✓ $\partial^2\Pi/\partial\mathbf{C}\partial\mathbf{C}$ to ${}^4\mathcal{A}$,
- ✓ $\rho\delta\mathbf{f}$ to \mathbf{g} .

If the derivation (1.2) via varying seems abstruse to the reader, it's possible to proceed from the following equations

$$\begin{aligned} \nabla\cdot\boldsymbol{\tau} + \rho\mathbf{f} &= \mathbf{0}, \quad \nabla = \mathbf{F}^{-\top}\cdot\overset{\circ}{\nabla}, \quad \mathbf{F} = \mathbf{E} + \overset{\circ}{\nabla}\mathbf{u}^\top, \\ \boldsymbol{\tau} &= J^{-1}\mathbf{F}\cdot\frac{\partial\Pi}{\partial\mathbf{C}}\cdot\mathbf{F}^\top, \quad \mathbf{C} = \overset{\circ}{\nabla}\mathbf{u}^S + \frac{1}{2}\overset{\circ}{\nabla}\mathbf{u}\cdot\overset{\circ}{\nabla}\mathbf{u}^\top. \end{aligned} \quad (1.3)$$

Assuming the displacement \mathbf{u} is small (infinitesimal), we'll move from (1.3) to (1.1).

* As written in the first sentence of “Historical introduction” in the Augustus Edward Hough Love’s book [26].

Or so. Instead of \mathbf{u} to take some small enough parameter $\chi \mathbf{u}$, $\chi \rightarrow 0$. And to represent thereafter the unknowns by the series in the integer exponents of parameter χ

$$\begin{aligned}\boldsymbol{\tau} &= \boldsymbol{\tau}^{(0)} + \chi \boldsymbol{\tau}^{(1)} + \dots, \quad \mathbf{C} = \mathbf{C}^{(0)} + \chi \mathbf{C}^{(1)} + \dots, \\ \boldsymbol{\nabla} &= \overset{\circ}{\boldsymbol{\nabla}} + \chi \boldsymbol{\nabla}^{(1)} + \dots, \quad \mathbf{F} = \mathbf{E} + \chi \overset{\circ}{\boldsymbol{\nabla}} \mathbf{u}^T, \quad J = 1 + \chi J^{(1)} + \dots\end{aligned}$$

The complete set of equations (1.1) comes from the first (zeroth) terms of these series. In the book [54] this is called “formal approximation”.

It is impossible to tell unambiguously how small the parameter χ should be — the answer depends on the situation and is determined by whether the linear model describes the effect we are interested in or not. When, as example, I’m interested in the relation between the frequency of a freely vibrating motion after the initial displacement, then a nonlinear model is needed.

A linear problem is posed in the initial volume $\mathcal{V} = \overset{\circ}{\mathcal{V}}$, bounded by the surface o with the area vector $\mathbf{n}do$ (“the principle of initial dimensions”).

The boundary conditions most often are: on the part o_1 of the surface displacements are known, and on another part o_2 the forces are known.

$$\mathbf{u}|_{o_1} = \mathbf{u}_0, \quad \mathbf{n} \cdot \boldsymbol{\sigma}|_{o_2} = \mathbf{p}. \quad (1.4)$$

The more complex combinations happen too, if we know the certain components of the both \mathbf{u} and $\mathbf{t}_{(n)} = \mathbf{n} \cdot \boldsymbol{\sigma}$ simultaneously. For example, on a flat face $x = \text{constant}$ when pressing a stamp with a smooth surface $u_x = \nu(y, z)$, $\tau_{xy} = \tau_{xz} = 0$ (the function ν is determined by the stamp’s shape).

In dynamics, vector \mathbf{g} also includes the inertial addend $-\rho \ddot{\mathbf{u}}$. And the initial conditions for dynamic problems commonly are : positions \mathbf{u} and velocities $\dot{\mathbf{u}}$, known at the specific moment of time $t=0$.

The linearity gives the principle of superposition (or independence) of the action of loads. When there are several loads, the problem can be solved for each load separately, and the complete solution is then obtained by summation. For statics this means, for example,

that if external loads \mathbf{g} and \mathbf{p} increase by m times (the body is fixed on o_1), then \mathbf{u} , $\boldsymbol{\varepsilon}$ and $\boldsymbol{\sigma}$ will increase by m times too. The potential energy Π will increase by m^2 times. In reality, this is observed only when the loads are small.

Potential energy

With linearity, the potential energy density Π as a function of infinitesimal deformation $\boldsymbol{\varepsilon}$ is a quadratic form

$$\Pi(\boldsymbol{\varepsilon}) = \frac{1}{2} \boldsymbol{\varepsilon} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \boldsymbol{\varepsilon}, \quad (1.5)$$

the variation of which is

$$\delta\Pi = \frac{1}{2} \delta(\boldsymbol{\varepsilon} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \boldsymbol{\varepsilon}) = \frac{1}{2} (\delta\boldsymbol{\varepsilon} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \boldsymbol{\varepsilon} + \boldsymbol{\varepsilon} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \delta\boldsymbol{\varepsilon}) = \underbrace{\boldsymbol{\varepsilon} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \delta\boldsymbol{\varepsilon}}_{\frac{\partial\Pi}{\partial\boldsymbol{\varepsilon}} = \boldsymbol{\sigma}}$$

and the second variation

$$\delta^2\Pi = \delta\boldsymbol{\varepsilon} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \delta\boldsymbol{\varepsilon}.$$

The relation between the stiffness tensor and the potential energy of elastic deformation is now clear :

$${}^4\mathcal{A} = \frac{\partial^2\Pi}{\partial\boldsymbol{\varepsilon}\partial\boldsymbol{\varepsilon}},$$

because $\delta\Pi(\boldsymbol{\varepsilon}) = \frac{\partial\Pi}{\partial\boldsymbol{\varepsilon}} \cdot \cdot \delta\boldsymbol{\varepsilon}$ and $\delta^2\Pi(\boldsymbol{\varepsilon}) = \delta\boldsymbol{\varepsilon} \cdot \cdot \frac{\partial^2\Pi}{\partial\boldsymbol{\varepsilon}\partial\boldsymbol{\varepsilon}} \cdot \cdot \delta\boldsymbol{\varepsilon}$.

Adding that here, as well as for 1-variable calculus*, $\delta^2\Pi = 2\Pi(\delta\boldsymbol{\varepsilon})$, the first and second variations of Π may be written as

$$\begin{aligned} \delta\Pi(\boldsymbol{\varepsilon}) &= \frac{\partial\Pi}{\partial\boldsymbol{\varepsilon}} \cdot \cdot \delta\boldsymbol{\varepsilon} = \boldsymbol{\varepsilon} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \delta\boldsymbol{\varepsilon} = \boldsymbol{\sigma} \cdot \cdot \delta\boldsymbol{\varepsilon}, \\ \delta^2\Pi(\boldsymbol{\varepsilon}) &= \delta\boldsymbol{\varepsilon} \cdot \cdot \frac{\partial^2\Pi}{\partial\boldsymbol{\varepsilon}\partial\boldsymbol{\varepsilon}} \cdot \cdot \delta\boldsymbol{\varepsilon} = \delta\boldsymbol{\varepsilon} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \delta\boldsymbol{\varepsilon} = 2\Pi(\delta\boldsymbol{\varepsilon}). \end{aligned} \quad (1.6)$$

* for $y(x) = \frac{1}{2}\alpha x^2 = \frac{1}{2}x\alpha x$ $dy = \frac{1}{2}(dx\alpha x + x\alpha dx) = x\alpha dx$
that is $d^2y = dx\alpha dx = \alpha(dx)^2$

The principle of virtual work

The d'Alembert–Lagrange principle of virtual work (??, § ??), which can be used as the foundation of mechanics, applies to the linear theory as well. Since internal forces in any elastic medium are potential ($\delta W^{(i)} = -\delta \Pi$), the principle is formulated as

$$\int_{\mathcal{V}} \left((\mathbf{g} - \rho \ddot{\mathbf{u}}) \cdot \delta \mathbf{u} - \delta \Pi \right) d\mathcal{V} + \int_{o_2} \mathbf{p} \cdot \delta \mathbf{u} d\mathbf{o} = 0, \quad \mathbf{u}|_{o_1} = \mathbf{0}. \quad (1.7)$$

In addition, if the medium is elastic *linearly*, then

$$\begin{aligned} \delta \mathcal{E} &= \delta(\nabla \mathbf{u}^S) = \nabla(\delta \mathbf{u}^S) = \nabla \delta \mathbf{u}^S, \\ \delta \Pi &= \boldsymbol{\sigma} \cdot \delta \mathcal{E} = \boldsymbol{\sigma} \cdot \nabla \delta \mathbf{u}^S = \nabla \cdot (\boldsymbol{\sigma} \cdot \delta \mathbf{u}) - \nabla \cdot \boldsymbol{\sigma} \cdot \delta \mathbf{u}, \\ \int_{\mathcal{V}} \delta \Pi d\mathcal{V} &= \oint_{o(\partial \mathcal{V})} \mathbf{n} \cdot \boldsymbol{\sigma} \cdot \delta \mathbf{u} d\mathbf{o} - \int_{\mathcal{V}} \nabla \cdot \boldsymbol{\sigma} \cdot \delta \mathbf{u} d\mathcal{V}, \end{aligned}$$

and (1.7) becomes

$$\int_{\mathcal{V}} \left(\nabla \cdot \boldsymbol{\sigma} + \mathbf{g} - \rho \ddot{\mathbf{u}} \right) \cdot \delta \mathbf{u} d\mathcal{V} + \int_{o_2} \left(\mathbf{p} - \mathbf{n} \cdot \boldsymbol{\sigma} \right) \cdot \delta \mathbf{u} d\mathbf{o} = 0.$$

Here, virtual displacements $\delta \mathbf{u}$ are compatible with the boundary condition for displacements in (1.7), $\delta \mathbf{u}|_{o_1} = \mathbf{0}$.

§ 2. The uniqueness of the solution in dynamics

Usually the uniqueness theorem is proven “by contradiction”. Assume that there are two solutions: $\mathbf{u}_1(\mathbf{r}, t)$ and $\mathbf{u}_2(\mathbf{r}, t)$. If the difference $\mathbf{u}^* \equiv \mathbf{u}_1 - \mathbf{u}_2$ will be equal to $\mathbf{0}$, then these solutions coincide, that is the solution is unique.

But at first we'll make sure of the existænce of the energy integral — by deriving the balance of mechanical energy equation for the linear model of the small displacements theory

$$\begin{aligned} \int_{\mathcal{V}} (\mathbf{K} + \Pi)^\bullet d\mathcal{V} &= \int_{\mathcal{V}} \mathbf{g} \cdot \dot{\mathbf{u}} d\mathcal{V} + \int_{o_2} \mathbf{p} \cdot \dot{\mathbf{u}} do, \\ \mathbf{u}|_{o_1} &= \mathbf{0}, \quad \mathbf{n} \cdot \boldsymbol{\sigma}|_{o_2} = \mathbf{p}, \\ \mathbf{u}|_{t=0} &= \mathbf{u}^\circ, \quad \dot{\mathbf{u}}|_{t=0} = \dot{\mathbf{u}}^\circ. \end{aligned} \quad (2.1)$$

For the left-hand side we have

$$\begin{aligned} \dot{\mathbf{K}} &= \frac{1}{2} (\rho \dot{\mathbf{u}} \cdot \dot{\mathbf{u}})^\bullet = \frac{1}{2} \rho (\dot{\mathbf{u}} \cdot \ddot{\mathbf{u}} + \ddot{\mathbf{u}} \cdot \dot{\mathbf{u}}) = \rho \ddot{\mathbf{u}} \cdot \dot{\mathbf{u}}, \\ \dot{\Pi} &= \frac{1}{2} \underbrace{(\boldsymbol{\varepsilon} \cdot \cdot \mathcal{A} \cdot \cdot \boldsymbol{\varepsilon})^\bullet}_{2\boldsymbol{\varepsilon} \cdot \cdot \mathcal{A} \cdot \cdot \dot{\boldsymbol{\varepsilon}}} = \boldsymbol{\sigma} \cdot \cdot \dot{\boldsymbol{\varepsilon}} = \boldsymbol{\sigma} \cdot \cdot \nabla \dot{\mathbf{u}}^S = \nabla \cdot (\boldsymbol{\sigma} \cdot \dot{\mathbf{u}}) - \underbrace{\nabla \cdot \boldsymbol{\sigma} \cdot \dot{\mathbf{u}}}_{-(\mathbf{g} - \rho \ddot{\mathbf{u}})} = \\ &= \nabla \cdot (\boldsymbol{\sigma} \cdot \dot{\mathbf{u}}) + (\mathbf{g} - \rho \ddot{\mathbf{u}}) \cdot \dot{\mathbf{u}} \end{aligned}$$

(the balance of momentum $\nabla \cdot \boldsymbol{\sigma} + \mathbf{g} - \rho \ddot{\mathbf{u}} = \mathbf{0}$ is used),

$$\dot{\mathbf{K}} + \dot{\Pi} = \nabla \cdot (\boldsymbol{\sigma} \cdot \dot{\mathbf{u}}) + \mathbf{g} \cdot \dot{\mathbf{u}}.$$

Applying the divergence theorem

$$\int_{\mathcal{V}} \nabla \cdot (\boldsymbol{\sigma} \cdot \dot{\mathbf{u}}) d\mathcal{V} = \oint_{o(\partial\mathcal{V})} \mathbf{n} \cdot \boldsymbol{\sigma} \cdot \dot{\mathbf{u}} do$$

and the boundary condition $\mathbf{n} \cdot \boldsymbol{\sigma} = \mathbf{p}$ on o_2 , we get (2.1).

From (2.1) it follows that without loads (when there're no external forces, neither volume nor surface), and the full mechanical energy doesn't change :

$$\mathbf{g} = \mathbf{0} \text{ and } \mathbf{p} = \mathbf{0} \Rightarrow \int_{\mathcal{V}} (\mathbf{K} + \Pi) d\mathcal{V} = \text{constant}(t). \quad (2.2)$$

If at the moment $t=0$ there was unstressed ($\Pi=0$) rest ($\mathbf{K}=0$), then

$$\int_{\mathcal{V}} (\mathbf{K} + \Pi) d\mathcal{V} = 0. \quad (2.2')$$

The kinetic energy is positive : $K > 0$ if $\dot{\mathbf{u}} \neq \mathbf{0}$ and vanishes (nullifies) only when $\dot{\mathbf{u}} = \mathbf{0}$ — this ensues from its definition $K \equiv \frac{1}{2} \rho \dot{\mathbf{u}} \cdot \dot{\mathbf{u}}$. The potential energy, being a quadratic form $\Pi(\boldsymbol{\varepsilon}) = \frac{1}{2} \boldsymbol{\varepsilon} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \boldsymbol{\varepsilon}$ (1.5), is positive too : $\Pi > 0$ if $\boldsymbol{\varepsilon} \neq {}^2\mathbf{0}$. Such is a priori requirement of the positive definiteness for stiffness tensor ${}^4\mathcal{A}$. This is one of the “additional inequalities in the theory of elasticity” [27, 54].

Since K and Π are positive definite, (2.2') gives

$$K = 0, \Pi = 0 \Rightarrow \dot{\mathbf{u}} = \mathbf{0}, \boldsymbol{\varepsilon} = \nabla \mathbf{u}^S = {}^2\mathbf{0} \Rightarrow \mathbf{u} = \mathbf{u}^\circ + \boldsymbol{\omega}^\circ \times \mathbf{r}$$

(\mathbf{u}° and $\boldsymbol{\omega}^\circ$ are some constants of translation and rotation). With an immobile part of the surface

$$\mathbf{u}|_{o_1} = \mathbf{0} \Rightarrow \mathbf{u}^\circ = \mathbf{0} \text{ and } \boldsymbol{\omega}^\circ = \mathbf{0} \Rightarrow \mathbf{u} = \mathbf{0} \text{ everywhere.}$$

Now back to the two solutions, \mathbf{u}_1 and \mathbf{u}_2 . Their difference $\mathbf{u}^* \equiv \mathbf{u}_1 - \mathbf{u}_2$ is a solution of the entirely “homogeneous” (with no constant terms at all) linear problem : in a volume $\mathbf{g} = \mathbf{0}$, in boundary and in initial conditions — zeroes. Therefore $\mathbf{u}^* = \mathbf{0}$, and the uniqueness is proven.

As for the existance of a solution — it cannot be proven for the generic case by simple conclusions. I could only tell that a dynamic problem is evolutionary, it describes the progress of a process in time.

The balance (the conservation) of momentum gives the acceleration $\ddot{\mathbf{u}}$. Then, moving to the “next time layer” $t + dt$:

$$\begin{aligned} \dot{\mathbf{u}}(\mathbf{r}, t + dt) &= \dot{\mathbf{u}}(\mathbf{r}, t) + \ddot{\mathbf{u}}dt, \\ \mathbf{u}(\mathbf{r}, t + dt) &= \mathbf{u}(\mathbf{r}, t) + \dot{\mathbf{u}}dt, \\ \boldsymbol{\varepsilon}(\mathbf{r}, t + dt) &= (\nabla \mathbf{u}(\mathbf{r}, t + dt))^S \Rightarrow \boldsymbol{\sigma}, \\ \nabla \cdot \boldsymbol{\sigma} + \mathbf{g} &= \rho \ddot{\mathbf{u}}(\mathbf{r}, t + dt) \end{aligned}$$

and so forth. Surely, these considerations lack the mathematical scrupulosity. The latter can be found, for example, in the Philippe Ciarlet’s monograph [22].

$$\sigma = \frac{\partial \Pi}{\partial \varepsilon} = {}^4\mathcal{A} \cdots \varepsilon = \varepsilon \cdots {}^4\mathcal{A}$$

§ 3. Hooke's law

That relation between the stress and the deformation (strain), which in the XVIIth century Robert Hooke could only phrase pretty vaguely*, is written as part of the complete set of equations (1.1) and is implemented via the stiffness tensor

$${}^4\mathcal{A} = \frac{\partial^2 \Pi}{\partial \varepsilon \partial \varepsilon} = A^{ijkl} \mathbf{r}_{\partial i} \mathbf{r}_{\partial j} \mathbf{r}_{\partial k} \mathbf{r}_{\partial l}, \quad A^{ijkl} = \frac{\partial^2 \Pi}{\partial \varepsilon_{ij} \partial \varepsilon_{kl}}. \quad (3.1)$$

The stiffness tensor is the partial derivative of the scalar elastic potential energy density Π twice by the same bivalent infinitesimal deformation tensor ε . It is symmetric in the pairs of indices: ${}^4\mathcal{A}_{12\equiv 34} = {}^4\mathcal{A} \Leftrightarrow A^{ijkl} = A^{klij}$. Therefrom 36 constants out of $3^4 = 81$ “have a twin” and only 45 are independent. Furthermore, due to the symmetry of the infinitesimal deformation tensor ε , the stiffness tensor ${}^4\mathcal{A}$ is symmetric inside each pair of indices: $A^{ijkl} = A^{jikl} = A^{ijlk}$ ($= A^{jilk}$). This reduces the number of the independent constants (the “elastic moduli”) to 21 :

$$A^{abcd} = A^{cdab} = A^{bacd} = A^{abdc}$$

$$A^{1111}$$

$$A^{1112} = A^{1121} = A^{1211} = A^{2111}$$

$$A^{1113} = A^{1131} = A^{1311} = A^{3111}$$

$$A^{1122} = A^{2211}$$

$$A^{1123} = A^{1132} = A^{2311} = A^{3211}$$

$$A^{1133} = A^{3311}$$

$$A^{1212} = A^{1221} = A^{2112} = A^{2121}$$

$$A^{1213} = A^{1231} = A^{1312} = A^{1321} = A^{2113} = A^{2131} = A^{3112} = A^{3121}$$

$$A^{1222} = A^{2122} = A^{2212} = A^{2221}$$

$$A^{1223} = A^{1232} = A^{2123} = A^{2132} = A^{2312} = A^{2321} = A^{3212} = A^{3221}$$

$$A^{1233} = A^{2133} = A^{3312} = A^{3321}$$

$$A^{1313} = A^{1331} = A^{3113} = A^{3131}$$

* “*ceiinossttuu, id est, Ut tensio sic vis*”— **Robert Hooke**. Lectures de Potentia Restitutiva, Or of Spring Explaining the Power of Springing Bodies. London, 1678. 56 pages.

$$\begin{aligned}
A^{1322} &= A^{2213} = A^{2231} = A^{3122} \\
A^{1323} &= A^{1332} = A^{2313} = A^{2331} = A^{3123} = A^{3132} = A^{3213} = A^{3231} \\
A^{1333} &= A^{3133} = A^{3313} = A^{3331} \\
A^{2222} \\
A^{2223} &= A^{2232} = A^{2322} = A^{3222} \\
A^{2233} &= A^{3322} \\
A^{2323} &= A^{2332} = A^{3223} = A^{3232} \\
A^{2333} &= A^{3233} = A^{3323} = A^{3332} \\
A^{3333}
\end{aligned}$$

The moduli of the tetravalent stiffness tensor are often written as the symmetric 6×6 matrix

$$[\mathcal{A}]_{6 \times 6} = \begin{bmatrix} a_{11} & a_{12} & a_{13} & a_{14} & a_{15} & a_{16} \\ a_{12} & a_{22} & a_{23} & a_{24} & a_{25} & a_{26} \\ a_{13} & a_{23} & a_{33} & a_{34} & a_{35} & a_{36} \\ a_{14} & a_{24} & a_{34} & a_{44} & a_{45} & a_{46} \\ a_{15} & a_{25} & a_{35} & a_{45} & a_{55} & a_{56} \\ a_{16} & a_{26} & a_{36} & a_{46} & a_{56} & a_{66} \end{bmatrix} \equiv \begin{bmatrix} A^{1111} & A^{1122} & A^{1133} & A^{1112} & A^{1113} & A^{1123} \\ A^{2211} & A^{2222} & A^{2233} & A^{1222} & A^{1322} & A^{2223} \\ A^{3311} & A^{3322} & A^{3333} & A^{1233} & A^{1333} & A^{2333} \\ A^{1211} & A^{2212} & A^{3312} & A^{1212} & A^{1213} & A^{1223} \\ A^{1311} & A^{2213} & A^{3313} & A^{1312} & A^{1313} & A^{1323} \\ A^{2311} & A^{2322} & A^{3323} & A^{2312} & A^{2313} & A^{2323} \end{bmatrix}$$

Even in Cartesian coordinates x, y, z , the quadratic form (1.5) looks pretty huge :

$$\begin{aligned}
2\Pi &= a_{11}\varepsilon_x^2 + a_{22}\varepsilon_y^2 + a_{33}\varepsilon_z^2 + a_{44}\varepsilon_{xy}^2 + a_{55}\varepsilon_{xz}^2 + a_{66}\varepsilon_{yz}^2 \\
&\quad + 2\left[\varepsilon_x(a_{12}\varepsilon_y + a_{13}\varepsilon_z + a_{14}\varepsilon_{xy} + a_{15}\varepsilon_{xz} + a_{16}\varepsilon_{yz})\right. \\
&\quad \quad + \varepsilon_y(a_{23}\varepsilon_z + a_{24}\varepsilon_{xy} + a_{25}\varepsilon_{xz} + a_{26}\varepsilon_{yz}) \\
&\quad \quad + \varepsilon_z(a_{34}\varepsilon_{xy} + a_{35}\varepsilon_{xz} + a_{36}\varepsilon_{yz}) \\
&\quad \quad \left. + \varepsilon_{xy}(a_{45}\varepsilon_{xz} + a_{46}\varepsilon_{yz}) + a_{56}\varepsilon_{xz}\varepsilon_{yz}\right]. \tag{3.2}
\end{aligned}$$

When a material symmetry is added, then the number of the independent moduli of tensor ${}^4\mathcal{A}$ decreases.

One plane of material symmetry, a monoclinic material

For a material with a symmetry plane of the elastic properties, for example $z = \text{constant}$.

The change of signs of x and y coordinates does not change the potential energy density Π . And this is possible only when

$$\Pi \Big|_{\substack{\varepsilon_{xz} = -\varepsilon_{xz} \\ \varepsilon_{yz} = -\varepsilon_{yz}}} = \Pi \quad \Leftrightarrow \quad \begin{aligned} 0 = a_{15} = a_{16} = a_{25} = a_{26} \\ = a_{35} = a_{36} = a_{45} = a_{46} \end{aligned} \quad (3.3)$$

— the number of independent coefficients lowers to 13.

An orthotropic material

Let there be then the two planes of symmetry : $z = \text{constant}$ and $y = \text{constant}$. Because energy Π in such a case is not sensitive to the signs of ε_{yx} and ε_{yz} , in addition to (3.3) we have

$$a_{14} = a_{24} = a_{34} = a_{56} = 0 \quad (3.4)$$

— 9 constants remained.

A material with the three mutually orthogonal planes of symmetry — let these be the x and y , z planes — is called the orthotropic (orthogonally anisotropic). It's easy to see that (3.3) and (3.4) is the whole set of zero constants, in this case as well. So, an orthotropic material is characterized by the nine elastic moduli, and for orthotropy the two mutually perpendicular planes of symmetry are enough. The expression for the elastic energy density here can be simplified to

$$\begin{aligned} \Pi = \frac{1}{2}a_{11}\varepsilon_x^2 + \frac{1}{2}a_{22}\varepsilon_y^2 + \frac{1}{2}a_{33}\varepsilon_z^2 + \frac{1}{2}a_{44}\varepsilon_{xy}^2 + \frac{1}{2}a_{55}\varepsilon_{xz}^2 + \frac{1}{2}a_{66}\varepsilon_{yz}^2 \\ + a_{12}\varepsilon_x\varepsilon_y + a_{13}\varepsilon_x\varepsilon_z + a_{23}\varepsilon_y\varepsilon_z. \end{aligned}$$

For an orthotropic material, the shear (angular) deformations ε_{xy} , ε_{xz} , ε_{yz} are not linked to the normal stresses $\sigma_x = \partial\Pi/\partial\varepsilon_x$, $\sigma_y = \partial\Pi/\partial\varepsilon_y$, $\sigma_z = \partial\Pi/\partial\varepsilon_z$ (and vice versa).

The popular orthotropic material is wood. Elastic properties there differ along three mutually perpendicular lines : by the radius, along the circumference and along the trunk height.

A transversely isotropic material

One more case of anisotropy is a transversely isotropic material. It is characterized by an axis of anisotropy — let it be z . Then any plane

which is parallel* to z is a plane of material symmetry. It is clear that this material is orthotropic. But more than that, any rotation of the deformation tensor $\boldsymbol{\varepsilon}$ around the z axis doesn't change the elastic potential energy density Π . Thus

$$\frac{\partial \Pi}{\partial \boldsymbol{\varepsilon}} \bullet (\mathbf{k} \times \boldsymbol{\varepsilon} - \boldsymbol{\varepsilon} \times \mathbf{k}) = 0, \quad (3.5)$$

because for any small rotation with vector $\boldsymbol{\delta o}$, the variation of the infinitesimal deformation tensor $\boldsymbol{\varepsilon}$ is $\boldsymbol{\delta o} \times \boldsymbol{\varepsilon} - \boldsymbol{\varepsilon} \times \boldsymbol{\delta o}$, and $\boldsymbol{\delta o}$ goes along z with the unit vector $\mathbf{k} \equiv \mathbf{e}_z$. The equation (3.5) is true for any infinitesimal deformation $\boldsymbol{\varepsilon}$. In components

$$\begin{aligned} & (a_{11}\varepsilon_x + a_{12}\varepsilon_y + a_{13}\varepsilon_z)(-2\varepsilon_{xy}) + (a_{12}\varepsilon_x + a_{22}\varepsilon_y + a_{23}\varepsilon_z)2\varepsilon_{xy} \\ & + 2a_{44}\varepsilon_{xy}(\varepsilon_x - \varepsilon_y) + 2a_{55}\varepsilon_{xz}(-\varepsilon_{yz}) + 2a_{66}\varepsilon_{yz}\varepsilon_{xz} = 0 \\ \Rightarrow & a_{11} = a_{12} + a_{44} = a_{22}, \quad a_{13} = a_{23}, \quad a_{55} = a_{66}. \end{aligned}$$

Writing the stress tensor like

$$\boldsymbol{\sigma} = \boldsymbol{\sigma}_\perp + s\mathbf{k} + \mathbf{k}s + \tau_{zz}\mathbf{k}\mathbf{k}, \quad (3.6)$$

where

$$\begin{aligned} \boldsymbol{\sigma}_\perp & \equiv \tau_{\alpha\beta} \mathbf{e}_\alpha \mathbf{e}_\beta = \tau_{xx} \mathbf{i}\mathbf{i} + \tau_{xy}(\mathbf{i}\mathbf{j} + \mathbf{j}\mathbf{i}) + \tau_{yy} \mathbf{j}\mathbf{j}, \\ s & \equiv \tau_{\alpha z} \mathbf{e}_\alpha = \tau_{xz} \mathbf{i} + \tau_{yz} \mathbf{j} \\ & (\alpha, \beta \text{ are } x \text{ or } y, \quad \mathbf{e}_x = \mathbf{i}, \quad \mathbf{e}_y = \mathbf{j}), \end{aligned}$$

the Hooke's law for a transversely isotropic material may be presented as

$$\begin{aligned} \boldsymbol{\sigma}_\perp & = a_{44}\boldsymbol{\varepsilon}_\perp + (a_{12}\varepsilon_{\alpha\alpha} + a_{13}\varepsilon_z)\mathbf{E}_\perp, \quad s = a_{55}\epsilon, \quad \tau_{zz} = a_{33}\varepsilon_z + a_{13}\varepsilon_{\alpha\alpha} \\ & \quad \quad \quad (3.7) \\ \text{(here } \boldsymbol{\varepsilon}_\perp & \equiv \varepsilon_{\alpha\beta} \mathbf{e}_\alpha \mathbf{e}_\beta, \quad \varepsilon_{\alpha\alpha} = \text{trace } \boldsymbol{\varepsilon}_\perp = \varepsilon_x + \varepsilon_y, \\ & \quad \quad \quad \epsilon \equiv \varepsilon_{\alpha z} \mathbf{e}_\alpha, \quad \mathbf{E}_\perp \equiv \mathbf{e}_\alpha \mathbf{e}_\alpha = \mathbf{i}\mathbf{i} + \mathbf{j}\mathbf{j} + \mathbf{j}\mathbf{j}) \end{aligned}$$

* If a plane is parallel to a line, this plane's normal vector is perpendicular to that line.

It comes that a transversely isotropic material is characterized by five non-null mutually independent components, the elastic moduli $a_{12} = A^{1122}$, $a_{13} = A^{1133}$, $a_{33} = A^{3333}$, $a_{44} = A^{1212}$, $a_{55} = A^{1313}$.

A crystal symmetry

There are many different kinds of a crystal symmetry : triclinic, monoclinic, rhombic, tetragonal **and others** [57]. Each case of symmetry is characterized by the set of orthogonal* tensors \mathbf{Q} , for which the following equation

$${}^4\mathcal{A} \bullet (\mathbf{Q} \cdot \boldsymbol{\varepsilon} \cdot \mathbf{Q}^\top) = \mathbf{Q} \cdot ({}^4\mathcal{A} \bullet \boldsymbol{\varepsilon}) \cdot \mathbf{Q}^\top \quad \forall \boldsymbol{\varepsilon} \quad (3.8)$$

is true (for any infinitesimal deformation $\boldsymbol{\varepsilon}$).

Inverse relations

.....

$$\boldsymbol{\varepsilon}(\boldsymbol{\sigma}) = \frac{\partial \Pi}{\partial \boldsymbol{\sigma}} = {}^4\mathcal{B} \bullet \boldsymbol{\sigma}, \quad \Pi(\boldsymbol{\sigma}) = \boldsymbol{\sigma} \bullet \boldsymbol{\varepsilon} - \Pi(\boldsymbol{\varepsilon}) \quad (3.9)$$

For the linear model

$$2\Pi = \boldsymbol{\sigma} \bullet \boldsymbol{\varepsilon}, \quad \Pi = \Pi = \frac{1}{2} \boldsymbol{\sigma} \bullet \boldsymbol{\varepsilon} \quad (3.10)$$

— the complementary energy density is numerically equal to the elastic potential energy density.

.....

The theory, describing the linear properties of anisotropic materials — the crystals, the composites, the wood and others,

The “material tensors” define the physical properties of bodies and media, kind of

- ✓ the elasticity,
- ✓ the thermal expansion,

* Orthogonal tensors are those that satisfy the equality $\mathbf{Q} \cdot \mathbf{Q}^\top = \mathbf{E}$ (??, § ??), describing rotations and mirror flippings.

- ✓ the thermal conductivity,
- ✓ the electrical conductivity,
- ✓ piezoelectric effect.

Piezoelectricity (the piezoelectric effect) is the coupling (for example, linear) between the mechanical strain and the electric charge in a material, it is the transduction of electrical and mechanical energy.

Certain materials generate an electrical charge when mechanical stress is applied to them. Piezoelectric materials directly transduce electrical and mechanical energy. The most famous piezoelectric material is quartz crystal. Certain ceramics are piezoelectric as well, piezoelectricity is often associated with ceramic materials. Piezoelectric behaviour is also observed in many polymers. And biomatter, such as bone and various proteins, too.

§ 4. Hooke's law for an isotropic material

For an isotropic material, (3.8) is satisfied a priori for any orthogonal tensor \mathbf{Q} . Here it's easier to assume that $\Pi(\boldsymbol{\varepsilon})$ becomes an isotropic function, which depends only on the invariants from the solution of the characteristic equation § ??.

$$2\Pi = A(\text{cha}\mathbf{I})^2 + B(\text{cha}\Pi). \quad (4.1)$$

$\Pi(\boldsymbol{\varepsilon})$ это квадратичная функция, функция с членами степени не выше второй, (или “квадратичная форма”)

$$2\Pi(\boldsymbol{\varepsilon}) = A\boldsymbol{\varepsilon} \cdot \boldsymbol{\varepsilon} + B\boldsymbol{\varepsilon} \cdot \boldsymbol{\varepsilon} \quad (4.2)$$

.....

$$\dots = \mathbf{E} \quad (4.3)$$

In the components for an isotropic medium we have

$$A_{ijpq} = \lambda\delta_{ij}\delta_{pq} + \mu(\delta_{ip}\delta_{jq} + \delta_{iq}\delta_{jp}) \quad (4.4)$$

— these are components of an isotropic tensor of the fourth complexity. These components don't change when a basis rotates.

.....
§ ????

(??)

§ 5. Theorems of statics

Clapeyron's theorem

In equilibrium with the external forces, the volume ones \mathbf{g} and the surface ones \mathbf{p} , the work of these “statically frozen” (that is constant along time) forces on the actual displacements is equal to the double of* the energy of deformation

$$2 \int_{\mathcal{V}} \Pi d\mathcal{V} = \int_{\mathcal{V}} \mathbf{g} \cdot \mathbf{u} d\mathcal{V} + \int_{o_2} \mathbf{p} \cdot \mathbf{u} do. \quad (5.1)$$

$$\begin{aligned} \bigcirc \quad 2\Pi &= \boldsymbol{\sigma} \cdot \boldsymbol{\varepsilon} = \boldsymbol{\sigma} \cdot \nabla \mathbf{u}^S = \nabla \cdot (\boldsymbol{\sigma} \cdot \mathbf{u}) - \underbrace{\nabla \cdot \boldsymbol{\sigma}}_{-\mathbf{g}} \cdot \mathbf{u} \Rightarrow \\ &\Rightarrow 2 \int_{\mathcal{V}} \Pi d\mathcal{V} = \int_{o_2} \underbrace{\mathbf{n} \cdot \boldsymbol{\sigma}}_{\mathbf{p}} \cdot \mathbf{u} do + \int_{\mathcal{V}} \mathbf{g} \cdot \mathbf{u} d\mathcal{V} \quad \bullet \end{aligned}$$

From (5.1) also follows, that without loading $\int_{\mathcal{V}} \Pi d\mathcal{V} = 0$. Because Π is positive, then the stress $\boldsymbol{\sigma}$, and deformation $\boldsymbol{\varepsilon}$ without a load are equal to zero.

$$\begin{aligned} 2\Pi &= \boldsymbol{\sigma} \cdot \boldsymbol{\varepsilon} \\ \dot{\Pi} &= \boldsymbol{\sigma} \cdot \dot{\boldsymbol{\varepsilon}} \\ \delta\Pi &= \boldsymbol{\sigma} \cdot \delta\boldsymbol{\varepsilon} \end{aligned}$$

*“Ce produit représentait d’ailleurs le double de la force vive que le ressort pouvait absorber par l’effet de sa flexion et qui était la mesure naturelle de sa puissance.” —

Benoît Paul Émile Clapeyron. Mémoire sur le travail des forces élastiques dans un corps solide élastique déformé par l’action de forces extérieures. *Comptes rendus*, Tome XLVI, Janvier–Juin 1858. Page 208–212.

Π is equal to only the half of the work of the external forces.

The accumulated potential energy of deformation Π is equal to only the half of the work done by the external forces, acting from the unstressed configuration to the equilibrium with the external forces.

Clapeyron's theorem implies that the accumulated elastic energy accounts for only the half of the energy spent on the deformation. The remaining half of the work, done by the external forces, is lost somewhere before reaching the equilibrium.

Roger Fosdick and Lev Truskinovsky. About Clapeyron's Theorem in Linear Elasticity. *Journal of Elasticity*, Volume 72, July 2003. Pages 145–172.

In theory, the concept of the “static loading” is common. It's when the external load is applied infinitely slow (sounds like forever, yeah).

The work of the external forces on the actual displacements is equal to the double of the potential energy density 2Π .

Если снять внешние воздействия мгновенно (бесконечно быстро), то тело будет колебаться. Но **из-за сопротивления среды (внутреннего трения)** спустя некоторое время тело придёт в состояние равновесия.

Yes, only the half of the linear elastic energy is stored. The second half is the “ additional energy ”, which is lost before reaching of the equilibrium on the dynamics — on the internal energy of the particles (of the dissipation), on the vibrations and waves.

But any real loading would be neither a sudden loading nor an infinitely slow loading. These are the two extremes. The real dynamics of applying the loads will always be different from the theory.

In the area of infinitesimal variations the real external forces, applied to the elastic medium, work on virtual displacements and produce the work, which is exactly equal to the variation of the elastic potential energy density.

$$\sigma \bullet \delta \epsilon = \delta \Pi.$$

A linear elastic medium is a medium, where a variation of work of the internal forces (that is stresses) is a variation of the potential energy density with the opposite sign $-\delta W^{(i)} = \delta \Pi = \delta W^{(e)}$, when the only displacements vary (the stress loads do not vary).

It is necessary that the virtual work of the real external forces on variations of displacements would be equal to the variation of the internal energy with the opposite sign (for an elastic media — the variation of the internal energy).

The uniqueness of the solution theorem

As in dynamics (§ 2), we suppose the existænce of the two solutions and are looking for their difference

$$\dots\dots\dots (5.2)$$

The uniqueness of the solution, discovered by Gustav Kirchhoff for bodies with the simply connected contour*, is contrary to, as it seems, the everyday experience. Imagine a straight rod, clamped at the one end (the “cantilever”) and compressed at the second end with a longitudinal force (figure 1). When the load is large enough, the problem of statics has the two solutions, “straight” and “bent”. Such a contradiction with the uniqueness theorem comes from the nonlinearity of this problem. If a load is small (infinitesimal), then the solution is described by the linear equations and is unique.

...

...

Reciprocal work theorem

Proposed by Enrico Betti**.

For a body with a fixed part σ_1 of the surface, the two cases are considered: the first one with loads $\mathbf{g}_1, \mathbf{p}_1$ and the second one with loads $\mathbf{g}_2, \mathbf{p}_2$. The verbal formulation of the theorem is the same as in §???. The mathematical notation

$$\overbrace{\int_V \mathbf{g}_1 \cdot \mathbf{u}_2 dV + \int_{\sigma_2} \mathbf{p}_1 \cdot \mathbf{u}_2 d\sigma}^{W_{12}} = \overbrace{\int_V \mathbf{g}_2 \cdot \mathbf{u}_1 dV + \int_{\sigma_2} \mathbf{p}_2 \cdot \mathbf{u}_1 d\sigma}^{W_{21}}. \quad (5.3)$$


...

The reciprocal work theorem, also known as the Betti's theorem, claims that for a linear elastic structure subject to the two sets of forces, P and Q , the work done by set P through displacements produced by set Q is equal to the work done by set Q through displacements produced by set P . This

* **Gustav Robert Kirchhoff.** Über das Gleichgewicht und die Bewegung eines unendlich dünnen elastischen Stabes. *Journal für die reine und angewandte Mathematik (Crelle's journal)*, 56. Band (1859). Seiten 285–313. (Seite 291)

** **Enrico Betti.** Teoria della elasticità. *Il Nuovo Cimento* (1869–1876), VII e VIII (1872). Pagina 69.

theorem has applications in structural engineering where it is used to define influence lines and derive the boundary element method.

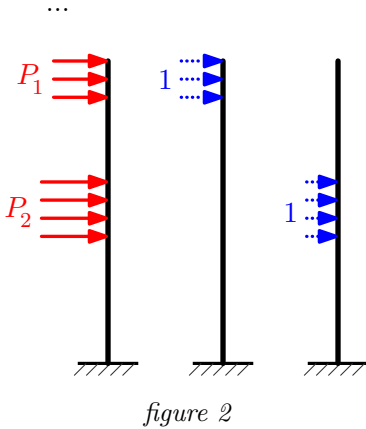

The reciprocal work theorem finds unexpected and effective applications. For example, consider a rod-beam clamped at one end (“cantilever”) and bent by the two forces with the integral values P_1 and P_2 (figure 2). While the linear theory is applied, displacements-deflections can be represented as

$$\begin{aligned} u_1 &= \alpha_{11}P_1 + \alpha_{12}P_2, \\ u_2 &= \alpha_{21}P_1 + \alpha_{22}P_2. \end{aligned}$$

§ 6. Equations in displacements

The complete set of equations (1.1) contains unknowns σ , ε and u . Excluding σ and ε , we get the formulation in displacements (symmetrization of ∇u is redundant due to the symmetry ${}^4\mathcal{A}_{3\rightleftharpoons 4} = {}^4\mathcal{A}$).

$$\begin{aligned} \nabla \cdot ({}^4\mathcal{A} \cdot \nabla u) + g &= 0, \\ u|_{o_1} &= u_0, \quad n \cdot {}^4\mathcal{A} \cdot \nabla u|_{o_2} = p. \end{aligned} \tag{6.1}$$

For an isotropic medium (6.1) becomes

....

The solution for the homogeneous part* of equation (...) was found by

Пётр Ф. Папкович (Pjotr F. Papkowitsch) Papkovich

* A homogeneous differential equation contains a differentiation and a homogeneous function with a set of variables.

Пётр Ф. Папкович. Выражение общего интеграла основных уравнений теории упругости через гармонические функции // Известия Академии наук СССР. Отделение математических и естественных наук. 1932, выпуск 10, страницы 1425–1435.

and Heinz Neuber

Heinz Neuber. Ein neuer Ansatz zur Lösung räumlicher Probleme der Elastizitätstheorie. Der Hohlkegel unter Einzellast als Beispiel // Zeitschrift für Angewandte Mathematik und Mechanik (ZAMM), 1934, Band 14, Nr. 4, Seiten 203–212.

Пётр Папкович в 1932 году и Heinz Neuber в 1934 предложили представление перемещений через гармонические функции, что даёт возможность использовать широкий каталог частных решений уравнения Laplace's. А иногда даже удаётся свести задачу теории упругости, если не целиком, то частично, к одной из классических задач теории гармонических функций (теории потенциала).

Для консервативных объёмных сил возможно аналитическое решение. Подход Папковича–Neuber'a не применим, если воздействия механической и иной физической природы не потенциальны.

Приведя полную совокупность уравнений к дифференциальному уравнению второй степени (в компонентах — к трём таким уравнениям) for a twice-differentiable function (трёх функций в компонентах), описывающих перемещение точек тела, Пётр Папкович и Hans Neuber смогли записать общее решение, однако, с существенным ограничением класса объёмных сил — рассматривались только потенциальные. Классические силы механического характера (силы тяжести, силы инерции при равномерном вращении тел, силы гравитационного взаимодействия) потенциальны.

.....

Three-dimensional elasticity based on quaternion-valued potentials

....

§ 7. Concentrated force in an infinite medium

A concentrated force is a useful mathematical idealization, but it cannot be found in the real world, where all forces are either body forces acting over a volume or surface forces acting over an area.

Here is a rhetorical question : *why an elastic body withstands an applied load, “bears” it?* The book [12] by James Gordon gives the following answer : the body deforms, and thus the internal forces appear, called “the stresses”, which can compensate an external load.

...

.....

§ 8. Finding displacements by deformations

Like any bivalent tensor, the displacement gradient can be decomposed into the sum of the symmetric and antisymmetric parts

$$\nabla \mathbf{u} = \overbrace{\boldsymbol{\varepsilon}}^{\nabla \mathbf{u}^S} - \overbrace{\boldsymbol{\omega} \times \mathbf{E}}^{-\nabla \mathbf{u}^A}, \quad \boldsymbol{\omega} \equiv \frac{1}{2} \nabla \times \mathbf{u}, \quad (8.1)$$

The symmetric part $\nabla \mathbf{u}^S$ is the linear deformation tensor $\boldsymbol{\varepsilon}$.

The antisymmetric part $\nabla \mathbf{u}^A$ can be denoted as $\boldsymbol{\Omega}$ and called the tensor of small rotations. Since any skew-symmetric bivalent tensor is uniquely representable by the vector (§ ??), the one more field — the vector field of rotations $\boldsymbol{\omega}(\mathbf{r})$ — is needed to find displacements \mathbf{u} by deformations $\boldsymbol{\varepsilon}$.

....

The deformation compatibility condition in the linear elasticity

The compatibility condition represent the integrability conditions for a symmetric bivalent tensor field. When such a tensor field is compatible, then it describes some deformation (strain).

In the displacement \mapsto deformation relation $\boldsymbol{\varepsilon} = \nabla \mathbf{u}^S$, the six components ε_{ij} of deformation $\boldsymbol{\varepsilon}$ originate from the only three components u_k of the displacement vector \mathbf{u} .

...

$$\text{inc } \boldsymbol{\varepsilon} \equiv \nabla \times (\nabla \times \boldsymbol{\varepsilon})^T \quad \text{or} \quad \text{inc } \boldsymbol{\varepsilon} \equiv \nabla \times \boldsymbol{\varepsilon} \times \nabla$$

....

A contour here is arbitrary, therefore

$$\text{inc } \boldsymbol{\varepsilon} = {}^2\mathbf{0}. \quad (8.2)$$

This relation is called the deformation compatibility condition or the deformation continuity equation(s).

...

Expression (8.2) constraints the possible types of the deformation (strain) field. The compatibility (continuity) condition ensures that no gaps and/or overlaps appear as the result of deformation.

(... add a picture here, the figure where the whole is cut into squares
...)

...

Tensor $\text{inc } \boldsymbol{\varepsilon}$ is symmetric together with $\boldsymbol{\varepsilon}$

....

The Saint-Venant's compatibility equations

It was previously proven that

$$\text{inc } \boldsymbol{\varepsilon} = {}^2\mathbf{0} \Leftrightarrow \Delta \boldsymbol{\varepsilon} + \nabla \nabla \boldsymbol{\varepsilon}_{\bullet} = 2(\nabla \nabla \cdot \boldsymbol{\varepsilon})^S$$

in index notation for rectangular coordinates

$$\partial_m \partial_m \varepsilon_{ij} + \partial_i \partial_j \varepsilon_{mm} = (\partial_i \partial_m \varepsilon_{mj} + \partial_j \partial_m \varepsilon_{mi})$$

with summations expanded

$$\begin{aligned} & \left(\frac{\partial^2 \varepsilon_{ij}}{\partial x_1^2} + \frac{\partial^2 \varepsilon_{ij}}{\partial x_2^2} + \frac{\partial^2 \varepsilon_{ij}}{\partial x_3^2} \right) + \left(\frac{\partial^2 \varepsilon_{11}}{\partial x_i \partial x_j} + \frac{\partial^2 \varepsilon_{22}}{\partial x_i \partial x_j} + \frac{\partial^2 \varepsilon_{33}}{\partial x_i \partial x_j} \right) \\ &= \left(\frac{\partial^2 \varepsilon_{1j}}{\partial x_i \partial x_1} + \frac{\partial^2 \varepsilon_{2j}}{\partial x_i \partial x_2} + \frac{\partial^2 \varepsilon_{3j}}{\partial x_i \partial x_3} \right) + \left(\frac{\partial^2 \varepsilon_{1i}}{\partial x_j \partial x_1} + \frac{\partial^2 \varepsilon_{2i}}{\partial x_j \partial x_2} + \frac{\partial^2 \varepsilon_{3i}}{\partial x_j \partial x_3} \right) \end{aligned}$$

for $i=j (=a)$

$$\begin{aligned} & \left(\frac{\partial^2 \varepsilon_{aa}}{\partial x_1^2} + \frac{\partial^2 \varepsilon_{aa}}{\partial x_2^2} + \frac{\partial^2 \varepsilon_{aa}}{\partial x_3^2} \right) + \left(\frac{\partial^2 \varepsilon_{11}}{\partial x_a^2} + \frac{\partial^2 \varepsilon_{22}}{\partial x_a^2} + \frac{\partial^2 \varepsilon_{33}}{\partial x_a^2} \right) \\ &= 2 \left(\frac{\partial^2 \varepsilon_{1a}}{\partial x_a \partial x_1} + \frac{\partial^2 \varepsilon_{2a}}{\partial x_a \partial x_2} + \frac{\partial^2 \varepsilon_{3a}}{\partial x_a \partial x_3} \right) \sum_a, \quad a=1, 2, 3 \end{aligned}$$

.....

$$\left\{ \begin{array}{l} \frac{\partial^2 \varepsilon_{22}}{\partial x_1^2} + \frac{\partial^2 \varepsilon_{11}}{\partial x_2^2} = 2 \frac{\partial^2 \varepsilon_{21}}{\partial x_1 \partial x_2} \\ \frac{\partial^2 \varepsilon_{33}}{\partial x_2^2} + \frac{\partial^2 \varepsilon_{22}}{\partial x_3^2} = 2 \frac{\partial^2 \varepsilon_{32}}{\partial x_2 \partial x_3} \\ \frac{\partial^2 \varepsilon_{11}}{\partial x_3^2} + \frac{\partial^2 \varepsilon_{33}}{\partial x_1^2} = 2 \frac{\partial^2 \varepsilon_{13}}{\partial x_3 \partial x_1} \\ \frac{\partial^2 \varepsilon_{23}}{\partial x_1^2} + \frac{\partial^2 \varepsilon_{11}}{\partial x_2 \partial x_3} = \frac{\partial^2 \varepsilon_{13}}{\partial x_2 \partial x_1} + \frac{\partial^2 \varepsilon_{12}}{\partial x_3 \partial x_1} \\ \frac{\partial^2 \varepsilon_{13}}{\partial x_2^2} + \frac{\partial^2 \varepsilon_{22}}{\partial x_1 \partial x_3} = \frac{\partial^2 \varepsilon_{23}}{\partial x_1 \partial x_2} + \frac{\partial^2 \varepsilon_{21}}{\partial x_3 \partial x_2} \\ \frac{\partial^2 \varepsilon_{12}}{\partial x_3^2} + \frac{\partial^2 \varepsilon_{33}}{\partial x_1 \partial x_2} = \frac{\partial^2 \varepsilon_{32}}{\partial x_1 \partial x_3} + \frac{\partial^2 \varepsilon_{31}}{\partial x_2 \partial x_3} \end{array} \right.$$

— the deformation continuity (compatibility) equations in “classical” notation for rectangular coordinates (the six Saint-Venant’s equations).

The last three can also be written as

$$\begin{aligned} \frac{\partial^2 \varepsilon_{11}}{\partial x_2 \partial x_3} &= \frac{\partial}{\partial x_1} \left(\frac{\partial \varepsilon_{13}}{\partial x_2} + \frac{\partial \varepsilon_{12}}{\partial x_3} - \frac{\partial \varepsilon_{23}}{\partial x_1} \right) \\ \frac{\partial^2 \varepsilon_{22}}{\partial x_1 \partial x_3} &= \frac{\partial}{\partial x_2} \left(\frac{\partial \varepsilon_{23}}{\partial x_1} + \frac{\partial \varepsilon_{21}}{\partial x_3} - \frac{\partial \varepsilon_{13}}{\partial x_2} \right) \\ \frac{\partial^2 \varepsilon_{33}}{\partial x_1 \partial x_2} &= \frac{\partial}{\partial x_3} \left(\frac{\partial \varepsilon_{32}}{\partial x_1} + \frac{\partial \varepsilon_{31}}{\partial x_2} - \frac{\partial \varepsilon_{12}}{\partial x_3} \right) \end{aligned}$$

Isaac Todhunter. The Elastical Researches of Barré de Saint-Venant. Cambridge University Press, 1889.

[110.] *L’institut*, Vol. 26, 1858, pp. 178–9. Further results on Torsion communicated to the *Société Philomathique* (April 24 and May 15, 1858) and afterwards incorporated in the *Leçons de Navier* (pp. 305–6, 273–4). They relate to cross-sections in the form of doubly symmetrical quartic curves and to torsion about an external axis: see our Arts. 49 (c), 182 (b), 181 (d), and 182 (a).

[111.] Vol. 27, 1860, of same Journal, pp. 21–2. Saint-Venant presents to the *Société Philomathique* the model *de la surface décrite par une corde*

vibrante transportée d'un mouvement rapide perpendiculaire à son plan de vibration. Copies of this as well as some other of Saint-Venant's models may still be obtained of M. Delagrave in Paris and are of considerable value for class-lectures on the vibration of elastic bodies.

[112.] Vol. 28, 1861, of same Journal, pp. 294–5. This gives an account of a paper of Saint-Venant's read before the *Société Philomathique* (July 28, 1860). In this he deduces the *conditions of compatibility*, or the six differential relations of the types :

$$2 \frac{d^2 s_x}{dy dz} = \frac{d}{dx} \left(\frac{d\sigma_{xz}}{dy} + \frac{d\sigma_{xy}}{dz} - \frac{d\sigma_{yz}}{dx} \right)$$

$$\frac{d^2 \sigma_{yz}}{dy dz} = \frac{d^2 s_y}{dz^2} + \frac{d^2 s_z}{dy^2}$$

which must be satisfied by the strain-components. These conditions enable us in many cases to dispense with the consideration of the shifts. A proof of these conditions by Boussinesq will be found in the *Journal de Liouville*, Vol. 16, 1871, pp. 132–4. At the same meeting Saint-Venant extended his results on torsion to : (1) prisms on any base with at each point only one plane of symmetry perpendicular to the sides, (2) prisms on an elliptic base with or without any plane of symmetry whatever ; see our Art. 190 (d).

What about nonlinear theory?

All equations of the linear theory have an analogue — the primary source — in the nonlinear theory. To find it for (8.2), remember the Cauchy–Green deformation tensor (§ ??) and the curvature tensors (§ ??)

.....

§ 9. Equations in stresses

The balance of forces (or of momentum)

$$\nabla \cdot \sigma + g = 0 \tag{9.1}$$

does not quite yet determine the stresses. It's necessary as well that deformations (strains) $\boldsymbol{\varepsilon}(\boldsymbol{\sigma})$ corresponding to stresses (3.9)

$$\boldsymbol{\varepsilon}(\boldsymbol{\sigma}) = \frac{\partial \Pi}{\partial \boldsymbol{\sigma}} = {}^4\mathcal{B} \cdots \boldsymbol{\sigma} \quad (9.2)$$

were compatible (§ 8)

$$\text{inc } \boldsymbol{\varepsilon}(\boldsymbol{\sigma}) \equiv \nabla \times \left(\nabla \times \boldsymbol{\varepsilon}(\boldsymbol{\sigma}) \right)^{\text{T}} = {}^2\mathbf{0}. \quad (9.3)$$

Gathered together, (9.1), (9.2) and (9.3) present the complete closed set (system) of equations in stresses.

...

§ 10. The principle of the minimum potential energy

When the existænce of the deformation energy function is assured, and the external forces are assumed to be constant during varying of displacements, then the principle of virtual work leads to the principle of the minimum potential energy.

The formulation of the principle:

$$\mathcal{E}(\mathbf{u}) \equiv \int_{\mathcal{V}} \left(\Pi(\mathbf{u}) - \mathbf{g} \cdot \mathbf{u} \right) d\mathcal{V} - \int_{o_2} \mathbf{p} \cdot \mathbf{u} d\mathbf{o} \rightarrow \min, \quad \mathbf{u}|_{o_1} = \mathbf{u}_0. \quad (10.1)$$

The functional $\mathcal{E}(\mathbf{u})$, called the (full) potential energy enof a linear-elastic body, is minimal when displacements \mathbf{u} are true — that is for the solution of a problem (6.1). The input functions \mathbf{u} must satisfy the geometrical condition on o_1 (so they don't break the existing constraints and can be continuous or else $\Pi(\mathbf{u})$ will not be integrable)

.

For the true field of displacements \mathbf{u} , the quadratic function

$$\Pi(\mathbf{u}) = \frac{1}{2} \nabla \mathbf{u} \cdots {}^4\mathcal{A} \cdots \nabla \mathbf{u}$$

becomes equal to the true potential energy of deformation. Then

$$\mathcal{E} = \mathcal{E}_{\min},$$

which according to the Clapeyron's theorem (5.1) is

$$\mathcal{E}_{\min} = \int_{\mathcal{V}} \Pi(\mathbf{u}) d\mathcal{V} - \left(\int_{\mathcal{V}} \mathbf{g} \cdot \mathbf{u} d\mathcal{V} + \int_{o_2} \mathbf{p} \cdot \mathbf{u} do \right) = - \int_{\mathcal{V}} \Pi(\mathbf{u}) d\mathcal{V}.$$

Taking a some other satisfactory field of displacements \mathbf{u}' , look at the finite difference

$$\mathcal{E}(\mathbf{u}') - \mathcal{E}(\mathbf{u}) = \int_{\mathcal{V}} \left(\Pi(\mathbf{u}') - \Pi(\mathbf{u}) - \mathbf{g} \cdot (\mathbf{u}' - \mathbf{u}) \right) d\mathcal{V} - \int_{o_2} \mathbf{p} \cdot (\mathbf{u}' - \mathbf{u}) do,$$

seeking $\mathcal{E}(\mathbf{u}') - \mathcal{E}(\mathbf{u}) \geq 0$ or (ditto) $\mathcal{E}(\mathbf{u}') \geq \mathcal{E}(\mathbf{u})$.

\mathbf{g} = **constant** and \mathbf{p} = **constant**

$\Pi(\mathbf{a}) = \frac{1}{2} \nabla \mathbf{a} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{a}$ (but *not* the linear $\frac{1}{2} \nabla \mathbf{u} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{a}$ — this means $\Pi(\mathbf{a}) \neq \frac{1}{2} \sigma \cdot \cdot \nabla \mathbf{a}$)

Constraints don't change: $(\mathbf{u}' - \mathbf{u})|_{o_1} = \mathbf{u}_0 - \mathbf{u}_0 = \mathbf{0}$. External surface force $\mathbf{p}|_{o_2} = \mathbf{t}_{(n)} = \mathbf{n} \cdot \sigma$ on o_2 and $= \mathbf{0}$ elsewhere on $o(\partial\mathcal{V})$. $\sigma = \nabla \mathbf{u} \cdot \cdot {}^4\mathcal{A} = {}^2\text{constant}$ along with constant \mathbf{p} and \mathbf{g} . Therefore

$$\begin{aligned} \int_{o_2} \mathbf{p} \cdot (\mathbf{u}' - \mathbf{u}) do &= \oint_{o(\partial\mathcal{V})} \mathbf{n} \cdot \sigma \cdot (\mathbf{u}' - \mathbf{u}) do = \int_{\mathcal{V}} \nabla \cdot (\sigma \cdot (\mathbf{u}' - \mathbf{u})) d\mathcal{V} = \\ &= \int_{\mathcal{V}} (\nabla \cdot \sigma) \cdot (\mathbf{u}' - \mathbf{u}) d\mathcal{V} + \int_{\mathcal{V}} \sigma^T \cdot \cdot \nabla (\mathbf{u}' - \mathbf{u}) d\mathcal{V}. \end{aligned}$$

Due to symmetry $\sigma^T = \sigma \Rightarrow \sigma^T \cdot \cdot \nabla \mathbf{a} = \sigma \cdot \cdot \nabla \mathbf{a} = \sigma \cdot \cdot \nabla \mathbf{a}^S \forall \mathbf{a}$. Разность преобразуется до

$$\begin{aligned} \mathcal{E}(\mathbf{u}') - \mathcal{E}(\mathbf{u}) &= \\ &= \int_{\mathcal{V}} \left(\Pi(\mathbf{u}') - \Pi(\mathbf{u}) - (\nabla \cdot \sigma + \mathbf{g}) \cdot (\mathbf{u}' - \mathbf{u}) - \sigma \cdot \cdot \nabla (\mathbf{u}' - \mathbf{u}) \right) d\mathcal{V}. \end{aligned}$$

And with the balance of momentum $\nabla \cdot \sigma + \mathbf{g} = \mathbf{0}$

$$\mathcal{E}(\mathbf{u}') - \mathcal{E}(\mathbf{u}) = \int_{\mathcal{V}} \left(\Pi(\mathbf{u}') - \Pi(\mathbf{u}) - \sigma \cdot \cdot \nabla (\mathbf{u}' - \mathbf{u}) \right) d\mathcal{V}.$$

Here

$$\Pi(\mathbf{u}') = \frac{1}{2} \nabla \mathbf{u}' \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{u}', \quad \Pi(\mathbf{u}) = \frac{1}{2} \nabla \mathbf{u} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{u},$$

$$\Pi(\mathbf{u}') - \Pi(\mathbf{u}) = \frac{1}{2} \left(\nabla \mathbf{u}' \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{u}' - \nabla \mathbf{u} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{u} \right)$$

$${}^4\mathcal{A}_{12 \rightleftharpoons 34} = {}^4\mathcal{A} \Rightarrow \nabla \mathbf{u} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{u}' = \nabla \mathbf{u}' \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{u}$$

$$\frac{1}{2} \left(\nabla \mathbf{u}' \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{u}' - \nabla \mathbf{u} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{u} + \nabla \mathbf{u} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{u}' - \nabla \mathbf{u}' \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{u} \right)$$

$$(\nabla \mathbf{u}' - \nabla \mathbf{u}) = \nabla(\mathbf{u}' - \mathbf{u})$$

for a finite difference of potentials

$$\frac{1}{2} \nabla(\mathbf{u}' + \mathbf{u}) \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla(\mathbf{u}' - \mathbf{u}) = \Pi(\mathbf{u}') - \Pi(\mathbf{u}),$$

adding to which

$$-\nabla \mathbf{u} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla(\mathbf{u}' - \mathbf{u}) = -\sigma \cdot \cdot \nabla(\mathbf{u}' - \mathbf{u})$$

we get

$$\frac{1}{2} \nabla(\mathbf{u}' - \mathbf{u}) \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla(\mathbf{u}' - \mathbf{u}) = \Pi(\mathbf{u}' - \mathbf{u})$$

and finally*

$$\mathcal{E}(\mathbf{u}') - \mathcal{E}(\mathbf{u}) = \int_{\mathcal{V}} \Pi(\mathbf{u}' - \mathbf{u}) d\mathcal{V}.$$

Since ${}^4\mathcal{A}$ is positive definite (§2) $\Pi(\mathbf{w}) = \frac{1}{2} \nabla \mathbf{w} \cdot \cdot {}^4\mathcal{A} \cdot \cdot \nabla \mathbf{w} \geq 0 \quad \forall \mathbf{w}$
(and $= 0$ only if $\nabla \mathbf{w} = \mathbf{0} \Leftrightarrow \mathbf{w} = \text{constant}$: for a case of translation as a whole without deformation.

...

$$* \quad b^2 - a^2 - 2a(b-a) = (b+a)(b-a) - 2a(b-a) = (b-a)^2$$

$$\delta \nabla \mathbf{u} = \nabla \delta \mathbf{u}$$

...

the Ritz method

The minimum functional problem $\mathcal{E}(\mathbf{u})$ is approximately solved as

.....

the finite element method

.....

§ 11. The principle of the minimum complementary energy

When the stress-strain relations (the Hooke's law) assure the existence of a complementary energy function and the geometrical boundary conditions are assumed constant during variation of stresses, then the principle of minimum complementary energy emerges.

The complementary energy of a linearly elastic body is the following functional over the field of stresses :

$$\mathcal{D}(\boldsymbol{\sigma}) \equiv \int_{\mathcal{V}} \Pi(\boldsymbol{\sigma}) dV - \int_{o_1} \mathbf{n} \cdot \boldsymbol{\sigma} \cdot \mathbf{u}_0 d\mathbf{o}, \quad \mathbf{u}_0 \equiv \mathbf{u}|_{o_1}, \quad (11.1)$$

$$\nabla \cdot \boldsymbol{\sigma} + \mathbf{g} = \mathbf{0}, \quad \mathbf{n} \cdot \boldsymbol{\sigma}|_{o_2} = \mathbf{p}.$$

...

The variation of the balance of force equation

$$\delta(\nabla \cdot \boldsymbol{\sigma} + \mathbf{g}) = \nabla \cdot \delta \boldsymbol{\sigma} = \mathbf{0}$$

...

The principle of the minimum complementary energy is very useful for estimating inexact (approximate) solutions. But for computations it isn't so essential as the (Lagrange) principle of minimum potential energy (10.1).

To derive the variational principles it is natural to use the principle of the virtual work (§ ??) as a foundation.

§12. Mixed principles of stationarity

Prange–Hellinger–Reissner Variational Principle,

named after *Ernst Hellinger*, *Georg Prange* and *Eric Reissner*.

Working independently of Hellinger and Prange, Eric Reissner published his famous six-page paper “On a variational theorem in elasticity” in 1950. In this paper he develops — without, however, considering Hamilton–Jacobi theory — a variational principle same to that of Prange and Hellinger.

Hu–Washizu Variational Principle,

named as *Hu Haichang* and *Kyuichiro Washizu*.

The following functional over the displacements and stresses

$$\mathcal{R}(u, \sigma) = \int_{\mathcal{V}} [\sigma \cdot \nabla u^S - \Pi(\sigma) - g \cdot u] d\mathcal{V} - \int_{o_1} n \cdot \sigma \cdot (u - u_0) do - \int_{o_2} p \cdot u do \quad (12.1)$$

carries names of Reissner, Prange and Hellinger.

...

The advantage of the Reissner–Hellinger principle — freedom of variation. But it also has a drawback: on the true solution the functional has no extremum, but only stationarity.

Принцип можно использовать для построения приближённых решений методом Ritz (Ritz method). Задавая аппроксимации

...

Принцип Hu–Washizu [102] формулируется так:

$$\begin{aligned} \delta \mathcal{W}(u, \varepsilon, \sigma) &= 0, \\ \mathcal{W} \equiv \int_{\mathcal{V}} [\sigma \cdot (\nabla u^S - \varepsilon) + \Pi(\varepsilon) - g \cdot u] d\mathcal{V} - \int_{o_1} n \cdot \sigma \cdot (u - u_0) do - \int_{o_2} p \cdot u do. \end{aligned} \quad (12.2)$$

Как и в принципе Reissner’a–Hellinger’a, здесь нет ограничений ни в объёме, ни на поверхности, но добавляется третий независимый аргумент ε . Поскольку $\Pi = \sigma \cdot \varepsilon - \Pi$, то (12.1) and (12.2) кажутся почти одним и тем же.

From the Hu–Washizu principle ensues the whole complete set of equations with boundary conditions, так как

.....

§ 13. Antiplane shear

This is such a problem of the linear theory of elasticity, where the non-trivial results are obtained by the simple outputs* .

This problem is about an isotropic elastic continuum in the cartesian coordinates

$$x_\alpha, \quad \alpha = 1, 2, \quad x_1 \text{ and } x_2.$$

The plane x_1, x_2 is a cross-section of a rod, the third coordinate x_3 is perpendicular to the section. The basis vectors are

$$\mathbf{e}_i = \partial_i \mathbf{r}, \quad \mathbf{r} = x_i \mathbf{e}_i, \quad \mathbf{e}_i \mathbf{e}_i = \mathbf{E} \Leftrightarrow \mathbf{e}_i \cdot \mathbf{e}_j = \delta_{ij}.$$

In a case of an antiplane strain (an antiplane shear), the field of displacements $\mathbf{u}(\mathbf{r})$ is parallel to the third coordinate x_3 :

$$\mathbf{u} = v \mathbf{e}_3,$$

and v doesn't depend on x_3 :

$$v = v(x_1, x_2), \quad \partial_3 v = 0.$$

The deformation

$$\boldsymbol{\varepsilon} \equiv \nabla \mathbf{u}^S = \nabla (v \mathbf{e}_3)^S = \mathbf{e}_3 \nabla v^S + \underbrace{v \nabla \mathbf{e}_3^S}_{\mathbf{20}} = \frac{1}{2} (\nabla v \mathbf{e}_3 + \mathbf{e}_3 \nabla v) \quad (13.1)$$

In the plane x_1, x_2 of the section

* Non-trivial in the theory of elasticity is, for example, when the division of a force by an area gives an infinitely large error in the calculation of the stresses.

$$\mu = \mu(x_1, x_2), \partial_3 \mu = 0$$

is a possible inhomogeneity of the medium.

§ 14. The torsion of rods

M. de Saint-Venant. Memoire sur la torsion des prismes (1853)

Adhémar-Jean-Claude Barré de Saint-Venant. Mémoire sur la torsion des prismes, avec des considérations sur leur flexion ainsi que sur l'équilibre intérieur des solides élastiques en général, et des formules pratiques pour le calcul de leur résistance à divers efforts s'exerçant simultanément. 1856. 327 pages.

1. Memoire sur la torsion des prismes, avec des considerations sur leur flexion, etc. Memoires presentes par divers savants a l'Academie des sciences, t. 14, 1856.

2. Memoire sur la flexion des prismes, etc. Journal de mathematiques pures et appliquees, publie par J. Liouville, 2me serie, t. 1, 1856.

Перевод на русский язык: **Сен-Венан Б.** Мемуар о кручении призм. Мемуар об изгибе призм. М.: Физматгиз, 1961. 518 страниц.
стр. 379–494

This problem, which was studied in detail by Adhémar-Jean-Claude Barré de Saint-Venant, is contained in almost every book about the linear elasticity. It considers a cylinder of some section, loaded only by the surface forces at the ends (... [add a figure](#) ...)

$$\begin{aligned} z = \ell : \mathbf{k} \cdot \boldsymbol{\sigma} &= \mathbf{p}(x_\alpha), \\ z = 0 : -\mathbf{k} \cdot \boldsymbol{\sigma} &= \mathbf{p}_0(x_\alpha), \end{aligned}$$

where $\mathbf{k} \equiv \mathbf{e}_3$, $\alpha = 1, 2$, $\mathbf{x} \equiv x_\alpha \mathbf{e}_\alpha$. Coordinates are x_1, x_2, z .

The resultant (the sum) of the external forces is equal to $\mathbf{0}$, and the resultant couple is directed along the z axis:

$$\int_o \mathbf{p} do = \mathbf{0}, \quad \int_o \mathbf{x} \times \mathbf{p} do = M \mathbf{k}.$$

It is known that the torsion **gives** the tangential components of stress $\tau_{z1} \equiv \mathbf{k} \cdot \boldsymbol{\sigma} \cdot \mathbf{e}_1$ and $\tau_{z2} \equiv \mathbf{k} \cdot \boldsymbol{\sigma} \cdot \mathbf{e}_2$. Assuming that only these components of tensor $\boldsymbol{\sigma}$ are non-zero

$$\boldsymbol{\sigma} = s\mathbf{k} + \mathbf{k}s, \quad s \equiv \tau_{z\alpha}e_\alpha.$$

The solution of this problem simplifies if the equations in stresses are used.

$$\nabla \cdot \boldsymbol{\sigma} = \mathbf{0} \Rightarrow \nabla_\perp \cdot \mathbf{s} = \mathbf{0} (\nabla_\perp \equiv e_\alpha \partial_\alpha), \partial_z \mathbf{s} = \mathbf{0}, \quad (14.1)$$

$$\nabla \cdot \nabla \boldsymbol{\sigma} + \frac{1}{1+\nu} \nabla \nabla \sigma = {}^2\mathbf{0} \Rightarrow \Delta_\perp \mathbf{s} = \mathbf{0} (\Delta_\perp \equiv \partial_\alpha \partial_\alpha). \quad (14.2)$$

The independence of \mathbf{s} from z makes it possible to replace the three-dimensional operators with the two-dimensional ones.

...

§ 15. Plane deformation

Here the displacement vector \mathbf{u} is parallel to the plane x_1, x_2 and does not depend on the third coordinate z .

For example рассмотрим полуплоскость с сосредоточенной нормальной силой Q на краю (?? рисунок ??)

...

Bibliography

There are several dozens of books on the classical linear theory of elasticity, which present some interest. Primarily this is the monograph by Anatoliy I. Lurie [28]. His earlier book [29] is dedicated to solving of the spatial problems. Witold Nowacki published his work [38], filled with the miscellaneous content. The author solved the dynamic problems. Also in his book is a description of the continuum of the Cosserat brothers. Being mathematically complex, the theory of elasticity attracts mathematicians, for example there is the monograph [22] of Philippe G. Ciarlet. Климентий Черных (Klimentiy Chernih) described the features of the anisotropy in the linear elastic media [57].

LIST OF PUBLICATIONS

1. **Antman, Stuart S.** The theory of rods. In: Truesdell C. (editor) Mechanics of solids. Volume II. Linear theories of elasticity and thermoelasticity. Linear and nonlinear theories of rods, plates, and shells. Springer-Verlag, 1973. Pages 641–703.
2. **Алфутов Н. А.** Основы расчета на устойчивость упругих систем. Издание 2-е. М.: Машиностроение, 1991. 336 с.
3. **Артоболевский И. И., Бобровницкий Ю. И., Генкин М. Д.** Введение в акустическую динамику машин. «Наука», 1979. 296 с.
4. **Ахтырец Г. П., Короткин В. И.** Использование МКЭ при решении контактной задачи теории упругости с переменной зоной контакта // Известия северо-кавказского научного центра высшей школы (СКНЦ ВШ). Серия естественные науки. Ростов-на-Дону: Издательство РГУ, 1984. № 1. С. 38–42.
5. **Ахтырец Г. П., Короткин В. И.** К решению контактной задачи с помощью метода конечных элементов // Механика сплошной среды. Ростов-на-Дону: Издательство РГУ, 1988. С. 43–48.
6. **Бидерман В. Л.** Механика тонкостенных конструкций. М.: Машиностроение, 1977. 488 с.
7. **Вениамин И. Блох.** Теория упругости. Харьков: Издательство Харьковского Государственного Университета, 1964. 484 с.
8. **Власов В. З.** Тонкостенные упругие стержни. М.: Физматгиз, 1959. 568 с.
9. **Гольденвейзер А. Л.** Теория упругих тонких оболочек. «Наука», 1976. 512 с.
10. **Гольденвейзер А. Л., Лидский В. Б., Товстик П. Е.** Свободные колебания тонких упругих оболочек. «Наука», 1979. 383 с.
11. **Gordon, James E.** Structures, or Why things don't fall down. Penguin Books, 1978. 395 pages. *Перевод: Гордон Дж.* Конструкции, или почему не ломаются вещи. «Мир», 1980. 390 с.

12. **Gordon, James E.** The new science of strong materials, or Why you don't fall through the floor. Penguin Books, 1968. 269 pages. *Перевод: Гордон Дж.* Почему мы не проваливаемся сквозь пол. «Мир», 1971. 272 с.
13. **Александр Н. Гузь.** Устойчивость упругих тел при конечных деформациях. Киев: “Наукова думка”, 1973. 271 с.
14. *Перевод: Де Вит Р.* Континуальная теория дисклинаций. «Мир», 1977. 208 с.
15. **Джанелидзе Г. Ю., Пановко Я. Г.** Статика упругих тонкостенных стержней. Л., М.: Гостехиздат, 1948. 208 с.
16. **Dorin Ieşan.** Classical and generalized models of elastic rods. 2nd edition. CRC Press, Taylor & Francis Group, 2009. 369 pages
17. **Владимир В. Елисеев.** Одномерные и трёхмерные модели в механике упругих стержней. Диссертация на соискание учёной степени доктора физико-математических наук. ЛГТУ, 1991. 300 с.
18. **Eshelby, John D.** The continuum theory of lattice defects // Solid State Physics, Academic Press, vol. 3, 1956, pp. 79–144. *Перевод: Эшелби Дж.* Континуальная теория дислокаций. М.: ИИЛ, 1963. 247 с.
19. **Журавлёв В. Ф.** Основы теоретической механики. 3-е издание, переработанное. М.: ФИЗМАТЛИТ, 2008. 304 с.
20. **Зубов Л. М.** Методы нелинейной теории упругости в теории оболочек. Изд-во Ростовского ун-та, 1982. 144 с.
21. **Кац, Арнольд М.** Теория упругости. 2-е издание, стереотипное. Санкт-Петербург: Издательство «Лань», 2002. 208 с.
22. **Ciarlet, Philippe G.** Mathematical elasticity. Volume 1: Three-dimensional elasticity. Elsevier Science Publishers B.V., 1988. xlii + 452 pp. *Перевод: Филипп Сьярле* Математическая теория упругости. «Мир», 1992. 472 с.
23. **Cosserat E. et Cosserat F.** Théorie des corps déformables. Paris: A. Hermann et Fils, 1909. 226 p.
24. **Cottrell, Alan.** Theory of crystal dislocations. Gordon and Breach (Documents on Modern Physics), 1964. 94 p. *Перевод: Коттрел А.* Теория дислокаций. «Мир», 1969. 96 с.

25. **Kröner, Ekkehart** (i) Kontinuumstheorie der Versetzungen und Eigenspannungen. Springer-Verlag, 1958. 180 pages. (ii) Allgemeine Kontinuumstheorie der Versetzungen und Eigenspannungen // Archive for Rational Mechanics and Analysis. Volume 4, Issue 1 (January 1959), pp. 273–334. *Перевод: Крёнер Э.* Общая континуальная теория дислокаций и собственных напряжений. «Мир», 1965. 104 с.
26. **Augustus Edward Hough Love**. A treatise on the mathematical theory of elasticity. Volume I. Cambridge, 1892. 354 p. Volume II. Cambridge, 1893. 327 p. 4th edition. Cambridge, 1927. Dover, 1944. 643 p. *Перевод: Аугустус Ляв.* Математическая теория упругости. М.: ОНТИ, 1935. 674 с.
27. **Анатолий И. Лурье**. Нелинейная теория упругости. «Наука», 1980. 512 с. *Translation: Lurie, A. I.* Nonlinear Theory of Elasticity: translated from the Russian by K. A. Lurie. Elsevier Science Publishers B.V., 1990. 617 p.
28. **Анатолий И. Лурье**. Теория упругости. «Наука», 1970. 940 с. *Translation: Lurie, A. I.* Theory of Elasticity (translated by A. Belyaev). Springer-Verlag, 2005. 1050 p.
29. **Анатолий И. Лурье**. Пространственные задачи теории упругости. М.: Гостехиздат, 1955. 492 с.
30. **Анатолий И. Лурье**. Статика тонкостенных упругих оболочек. М., Л.: Гостехиздат, 1947. 252 с.
31. **George E. Mase**. Schaum's outline of theory and problems of continuum mechanics (Schaum's outline series). McGraw-Hill, 1970. 221 p. *Перевод: Джордж Мейз.* Теория и задачи механики сплошных сред. Издание 3-е. URSS, 2010. 320 с.
32. **Ernst Melan, Heinz Parkus**. Wärmespannungen infolge stationärer Temperaturfelder. Wein, Springer-Verlag, 1953. 114 Seiten. *Перевод: Мелан Э., Паркус Г.* Термоупругие напряжения, вызываемые стационарными температурными полями. М.: Физматгиз, 1958. 167 с.
33. **Меркин Д. Р.** Введение в механику гибкой нити. «Наука», 1980. 240 с.
34. **Меркин Д. Р.** Введение в теорию устойчивости движения. 3-е издание. «Наука», 1987. 304 с.

35. **Mindlin, Raymond David and Tiersten, Harry F.** Effects of couplestresses in linear elasticity // Archive for Rational Mechanics and Analysis. Volume 11, Issue 1 (January 1962), pp. 415–448. *Перевод: Миндлин Р. Д., Тирстен Г. Ф.* Эффекты моментных напряжений в линейной теории упругости // Механика: Сборник переводов и обзоров иностранной периодической литературы. «Мир», 1964. № 4 (86). С. 80–114.
36. **Naghdi P. M.** The theory of shells and plates. In: Truesdell C. (editor) Mechanics of solids. Volume II. Linear theories of elasticity and thermoelasticity. Linear and nonlinear theories of rods, plates, and shells. Springer-Verlag, 1973. Pages 425–640.
37. **Witold Nowacki.** Dynamiczne zagadnienia termosprężystości. Warszawa: Państwowe wydawnictwo naukowe, 1966. 366 stron. *Translation: Nowacki, Witold.* Dynamic problems of thermoelasticity. Leyden: Noordhoff international publishing, 1975. 436 pages. *Перевод: Витольд Новацкий.* Динамические задачи термоупругости. «Мир», 1970. 256 с.
38. **Witold Nowacki.** Teoria sprężystości. Warszawa: Państwowe wydawnictwo naukowe, 1970. 769 stron. *Перевод: Новацкий Витольд.* Теория упругости. «Мир», 1975. 872 с.
39. **Witold Nowacki.** Efekty elektromagnetyczne w stałych ciałach odkształcalnych. Państwowe wydawnictwo naukowe, 1983. 147 stron. *Перевод: Новацкий В.* Электромагнитные эффекты в твёрдых телах. «Мир», 1986. 160 с.
40. **Новожилов В. В.** Теория тонких оболочек. 2-е издание. Л.: Судпромгиз, 1962. 431 с.
41. **Пановко Я. Г., Бейлин Е. А.** Тонкостенные стержни и системы, составленные из тонкостенных стержней. В сборнике: Рабинович И. М. (редактор) Строительная механика в СССР 1917–1967. М.: Стройиздат, 1969. С. 75–98.
42. **Пановко Я. Г., Губанова И. И.** Устойчивость и колебания упругих систем. Современные концепции, парадоксы и ошибки. 4-е издание. «Наука», 1987. 352 с.
43. **Heinz Parkus.** Instationäre Wärmespannungen. Springer-Verlag, 1959. 176 Seiten. *Перевод: Паркус Г.* Неустановившиеся температурные напряжения. М.: Физматгиз, 1963. 252 с.
44. **Партон Владимир З., Кудрявцев Борис А.** Электромагнитоупругость пьезоэлектрических и электропроводных тел. «Наука», 1988. 472 с.

45. **Подстригач Я. С., Бурак Я. И., Кондрат В. Ф.** Магнитотермоупругость электропроводных тел. Киев: Наукова думка, 1982. 296 с.
46. **Поручиков В. Б.** Методы динамической теории упругости. «Наука», 1986. 328 с.
47. **Adhémar Jean Claude Barré de Saint-Venant.** De la torsion des prismes, avec des considérations sur leur flexion ainsi que sur l'équilibre des solides élastiques en général, et des formules pratiques pour le calcul de leur résistance à divers efforts s'exerçant simultanément. Extrait du tome xiv des mémoires présentés par divers savants a l'académie des sciences. Imprimerie Impériale, Paris, M DCCC LV (1855). 332 pages. *Перевод на русский язык: Сен-Венан Б.* Мемуар о кручении призм. Мемуар об изгибе призм. М.: Физматгиз, 1961. 518 страниц.
48. **Adhémar Jean Claude Barré de Saint-Venant.** Mémoire sur la flexion des prismes, sur les glissements transversaux et longitudinaux qui l'accompagnent lorsqu'elle ne s'opère pas uniformément ou en arc de cercle, et sur la forme courbe affectée alors par leurs sections transversales primitivement planes. Journal de mathématiques pures et appliquées, publié par Joseph Liouville. 2me serie, tome 1, année 1856. Pages 89 à 189. *Перевод на русский язык: Сен-Венан Б.* Мемуар о кручении призм. Мемуар об изгибе призм. М.: Физматгиз, 1961. 518 страниц.
49. **Southwell, Richard V.** An introduction to the theory of elasticity for engineers and physicists. Dover Publications, 1970. 509 pages. *Перевод: Саусвелл Р. В.* Введение в теорию упругости для инженеров и физиков. М.: ИИЛ, 1948. 675 с.
50. **Cristian Teodosiu.** Elastic models of crystal defects. Springer-Verlag, 1982. 336 pages. *Перевод: Теодосиу К.* Упругие модели дефектов в кристаллах. «Мир», 1985. 352 с.
51. **Тимошенко Степан П.** Устойчивость стержней, пластин и оболочек. «Наука», 1971. 808 с.
52. **Тимошенко Степан П., Войновский-Кригер С.** Пластинки и оболочки. «Наука», 1966. 635 с.
53. **Stephen P. Timoshenko and James N. Goodier.** Theory of Elasticity. 2nd edition. McGraw-Hill, 1951. 506 pages. 3rd edition. McGraw-Hill, 1970. 567 pages. *Перевод: Тимошенко Степан П., Джеймс Гудьер.* Теория упругости. 2-е издание. «Наука», 1979. 560 с.

54. **Truesdell, Clifford A.** A first course in rational continuum mechanics. Volume 1: General concepts. 2nd edition. Academic Press, 1991. 391 pages. *Перевод: Труделл К.* Первоначальный курс рациональной механики сплошных сред. «Мир», 1975. 592 с.
55. **Феодосьев В. И.** Десять лекций-бесед по сопротивлению материалов. 2-е издание. «Наука», 1975. 173 с.
56. *Перевод: Циглер Г.* Основы теории устойчивости конструкций. «Мир», 1971. 192 с.
57. **Черных К. Ф.** Введение в анизотропную упругость. «Наука», 1988. 192 с.
58. **Шермергор Т. Д.** Теория упругости микронеоднородных сред. «Наука», 1977. 400 с.

Oscillations and waves

59. **Timoshenko, Stephen P.; Young, Donovan H.; William Weaver, jr.** Vibration problems in engineering. 5th edition. John Wiley & Sons, 1990. 624 pages. *Перевод: Тимошенко Степан П., Янг Донован Х., Уильям Уивер.* Колебания в инженерном деле. М.: Машиностроение, 1985. 472 с.
60. **Бабаков И. М.** Теория колебаний. 4-е издание. «Дрофа», 2004. 592 с.
61. **Бидерман В. Л.** Теория механических колебаний. М.: Высшая школа, 1980. 408 с.
62. **Болотин В. В.** Случайные колебания упругих систем. «Наука», 1979. 336 с.
63. **Гринченко В. Т., Мелешко В. В.** Гармонические колебания и волны в упругих телах. Киев: Наукова думка, 1981. 284 с.
64. **Whitham, Gerald B.** Linear and nonlinear waves. John Wiley & Sons, 1974. 636 pages. *Перевод: Узизем Дж.* Линейные и нелинейные волны. «Мир», 1977. 624 с.
65. **Kolsky, Herbert.** Stress waves in solids. Oxford, Clarendon Press, 1953. 211 p. 2nd edition. Dover Publications, 2012. 224 p. *Перевод: Кольский Г.* Волны напряжения в твёрдых телах. М.: ИИЛ, 1955. 192 с.
66. **Энгельбрехт Ю. К., Нигул У. К.** Нелинейные волны деформации. «Наука», 1981. 256 с.
67. **Слепян Л. И.** Нестационарные упругие волны. Л.: Судостроение, 1972. 376 с.

68. **Григолюк Э. И., Селезов И. Т.** Неклассические теории колебаний стержней, пластин и оболочек. (Итоги науки и техники. Механика твердых деформируемых тел. Том 5.) М.: ВИНТИ, 1973. 272 с.

Fracture mechanics

69. **Качанов Л. М.** Основы механики разрушения. «Наука», 1974. 312 с.
70. **Керштейн И. М., Ключников В. Д., Ломакин Е. В., Шестериков С. А.** Основы экспериментальной механики разрушения. Изд-во МГУ, 1989. 140 с.
71. **Морозов Н. Ф.** Математические вопросы теории трещин. «Наука», 1984. 256 с.
72. **Партон Владимир З.** Механика разрушения: от теории к практике. «Наука», 1990. 240 с.
73. **Партон Владимир З., Морозов Евгений М.** Механика упругопластического разрушения. 2-е издание. «Наука», 1985. 504 с.
74. *Перевод: Хеллан К.* Введение в механику разрушения. «Мир», 1988. 364 с.
75. **Черепанов Г. П.** Механика хрупкого разрушения. «Наука», 1974. 640 с.
76. **Черепанов Г. П.** Механика разрушения композиционных материалов. «Наука», 1983. 296 с.

Composites

77. **Christensen, Richard M.** Mechanics of composite materials. New York: Wiley, 1979. 348 p. *Перевод: Кристенсен Р.* Введение в механику композитов. «Мир», 1982. 336 с.
78. **Кравчук А. С., Майборода В. П., Уржумцев Ю. С.** Механика полимерных и композиционных материалов. Экспериментальные и численные методы. «Наука», 1985. 304 с.
79. **Победря Б. Е.** Механика композиционных материалов. Изд-во Моск. ун-та, 1984. 336 с.
80. **Бахвалов Н. С., Панасенко Г. П.** Осреднение процессов в периодических средах. Математические задачи механики композиционных материалов. «Наука», 1984. 352 с.
81. **Bensoussan A., Lions J.-L., Papanicolaou G.** Asymptotic analysis for periodic structures. Amsterdam: North-Holland, 1978. 700 p.

The finite element method

82. **Зенкевич О., Морган К.** Конечные элементы и аппроксимация. «Мир», 1986. 318 с.
83. **Шабров Н. Н.** Метод конечных элементов в расчётах деталей тепловых двигателей. Л.: Машиностроение, 1983. 212 с.

Mechanics, thermodynamics, electromagnetism

84. **Feynman, Richard Ph. • Leighton, Robert B. • Sands, Matthew.** The Feynman Lectures on Physics. New millennium edition. Volume II: Mainly electromagnetism and matter. Basic Books, 2011. 566 pages. *Online: The Feynman Lectures on Physics. Online edition.*
85. **Goldstein, Herbert; Poole, Charles P.; Safko, John L.** Classical Mechanics. 3rd edition. Addison–Wesley, 2001. 638 pages. *Перевод: Голдстейн Г., Пул Ч., Сафко Дж.* Классическая механика. URSS, 2012. 828 с.
86. **Pars, Leopold A.** A treatise on analytical dynamics. London: Heinemann, 1965. 641 pages. *Перевод: Парс Л. А.* Аналитическая динамика. «Наука», 1971. 636 с.
87. **Ter Haar, Dirk.** Elements of hamiltonian mechanics. 2nd edition. Pergamon Press, 1971. 201 pages. *Перевод: Тер Хаар Д.* Основы гамильтоновой механики. «Наука», 1974. 223 с.
88. **Беляев Н. М., Рядно А. А.** Методы теории теплопроводности. М.: Высшая школа, 1982. В 2-х томах. Том 1, 328 с. Том 2, 304 с.
89. **Бредов М. М., Румянцев В. В., Топтыгин И. Н.** Классическая электродинамика. «Наука», 1985. 400 с.
90. **Феликс Р. Гантмахер** Лекции по аналитической механике. Издание 2-е. «Наука», 1966. 300 с.
91. **Ландау Л. Д., Лифшиц Е. М.** Краткий курс теоретической физики. Книга 1. Механика. Электродинамика. «Наука», 1969. 271 с.
92. **Лев Г. Лойцянский, Анатолий И. Лурье.** Курс теоретической механики: В 2-х томах. «Дрофа», 2006. Том 1: Статика и кинематика. 9-е издание. 447 с. Том 2: Динамика. 7-е издание. 719 с.
93. **Анатолий И. Лурье.** Аналитическая механика. М.: Физматгиз, 1961. 824 с.
94. **Ольховский И. И.** Курс теоретической механики для физиков. 3-е издание. Изд-во МГУ, 1978. 575 с.

95. **Тамм И. Е.** Основы теории электричества. 11-е издание. М.: Физматлит, 2003. 616 с.

Tensors and tensor calculus

96. **McConnell, Albert Joseph.** Applications of tensor analysis. New York: Dover Publications, 1957. 318 pages. *Перевод: Мак-Коннел А. Дж.* Введение в тензорный анализ с приложениями к геометрии, механике и физике. М.: Физматгиз, 1963. 412 с.
97. **Димитриенко Ю. И.** Тензорное исчисление: Учебное пособие для вузов. М.: “Высшая школа”, 2001. 575 с.
98. **Рашевский П. К.** Риманова геометрия и тензорный анализ. Издание 3-е. «Наука», 1967. 664 с.
99. **Schouten, Jan A.** Tensor analysis for physicists. 2nd edition. Dover Publications, 2011. 320 pages. *Перевод: Схоутен Я. А.* Тензорный анализ для физиков. «Наука», 1965. 456 с.
100. **Sokolnikoff, I. S.** Tensor analysis: Theory and applications to geometry and mechanics of continua. 2nd edition. John Wiley & Sons, 1965. 361 pages. *Перевод: Сокольников И. С.* Тензорный анализ (с приложениями к геометрии и механике сплошных сред). «Наука», 1971. 376 с.

Variational methods

101. **Karel Rektorys.** Variační metody v inženýrských problémech a v problémech matematické fyziky. SNTL (Státní nakladatelství technické literatury), 1974. 593 s. *Translation: Rektorys, Karel.* Variational Methods in Mathematics, Science and Engineering. Second edition. D. Reidel Publishing Company, 1980. 571 p. *Перевод: Ректорис К.* Вариационные методы в математической физике. «Мир», 1985. 590 с.
102. **Washizu, Kyuichiro.** Variational methods in elasticity and plasticity. 3rd edition. Pergamon Press, Oxford, 1982. 630 pages. *Перевод: Васидзу К.* Вариационные методы в теории упругости и пластичности. «Мир», 1987. 542 с.
103. **Бердичевский В. Л.** Вариационные принципы механики сплошной среды. «Наука», 1983. 448 с.
104. **Михлин С. Г.** Вариационные методы в математической физике. Издание 2-е. «Наука», 1970. 512 с.

Perturbation methods (asymptotic methods)

105. **Cole, Julian D.** Perturbation methods in applied mathematics. Blaisdell Publishing Co., 1968. 260 pages. *Перевод: Коул Дж.* Методы возмущений в прикладной математике. «Мир», 1972. 274 с.
106. **Nayfeh, Ali H.** Introduction to perturbation techniques. Wiley, 1981. 536 pages. *Перевод: Найфэ Али Х.* Введение в методы возмущений. «Мир», 1984. 535 с.
107. **Nayfeh, Ali H.** Perturbation methods. Wiley-VCH, 2004. 425 pages.
108. **Боголюбов Н. Н., Митропольский Ю. А.** Асимптотические методы в теории нелинейных колебаний. «Наука», 1974. 504 с.
109. **Васильева А. Б., Бутузов В. Ф.** Асимптотические методы в теории сингулярных возмущений. М.: Высшая школа, 1990. 208 с.
110. **Зино И. Е., Тропш Э. А.** Асимптотические методы в задачах теории теплопроводности и термоупругости. Изд-во ЛГУ, 1978. 224 с.
111. **Моисеев Н. Н.** Асимптотические методы нелинейной механики. 2-е издание. «Наука», 1981. 400 с.
112. **Товстик П. Е.** Устойчивость тонких оболочек: асимптотические методы. «Наука», 1995. 319 с.

Other topics of mathematics

113. **Collatz, Lothar.** Eigenwertaufgaben mit technischen Anwendungen. 2. Auflage. Akademische Verlagsgesellschaft Geest & Portig, Leipzig, 1963. 500 Seiten. *Перевод: Коллатц Л.* Задачи на собственные значения (с техническими приложениями). «Наука», 1968. 504 с.
114. **Dwight, Herbert Bristol.** Tables of integrals and other mathematical data. 4th edition. The Macmillan Co., 1961. 336 pages. *Перевод: Двайт Г. Б.* Таблицы интегралов и другие математические формулы. Издание 4-е. «Наука», 1973. 228 с.
115. **Kamke, Erich.** Differentialgleichungen, Lösungsmethoden und Lösungen. Bd. I. Gewöhnliche Differentialgleichungen. 10. Auflage. Teubner Verlag, 1977. 670 Seiten. *Перевод: Камке Э.* Справочник по обыкновенным дифференциальным уравнениям. 6-е издание. «Лань», 2003. 576 с.
116. **Korn, Granino A. and Korn, Theresa M.** Mathematical handbook for scientists and engineers: definitions, theorems, and formulas for reference and review. Revised edition. Dover Publications, 2013. 1152 pages. *Перевод: Корн Г., Корн Т.* Справочник по математике для научных работников и инженеров. «Наука», 1974. 832 с.

117. **Лаврентьев М. А., Шабат Б. В.** Методы теории функций комплексного переменного. 4-е издание. «Наука», 1973. 736 с.
118. **Погорелов А. В.** Дифференциальная геометрия. Издание 6-е. «Наука», 1974. 176 с.