


Input Power and USB

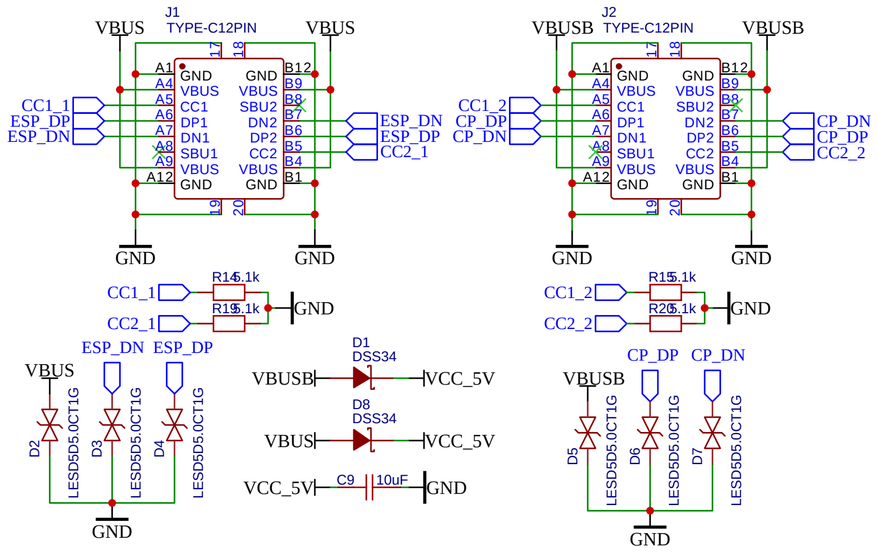


RST Button




User Button




Power LEDs

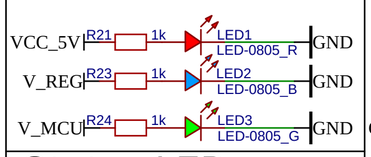


Status LED



Ethernet W5500

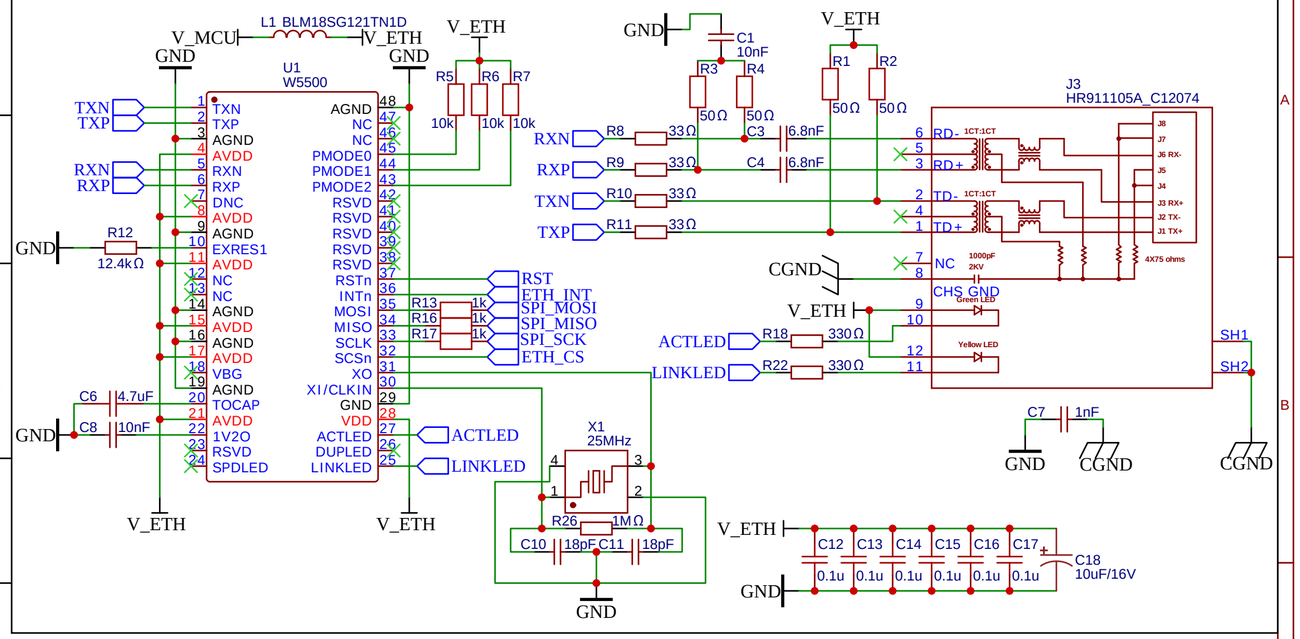


Headers

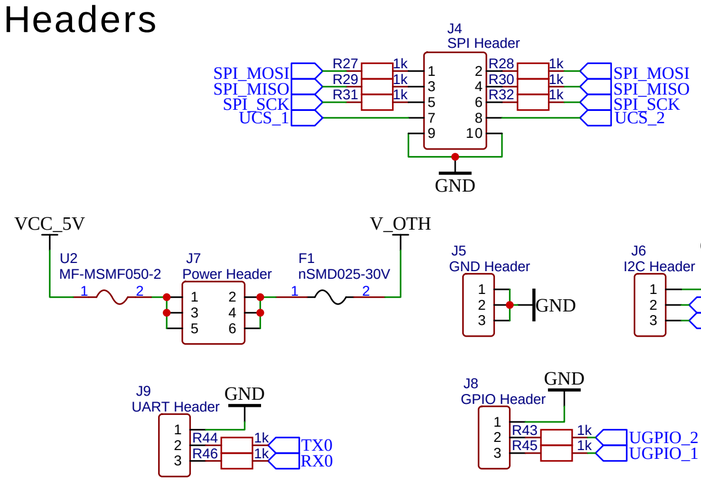

I2C Addresses Table


ID	NAME	ADDRESS
U7	INA219	0x40
U16	BME280	0x76
FPC1	Camera Interface	0x60(W) 0x61(R)
U4	I2C GPIO	0x20

MCU

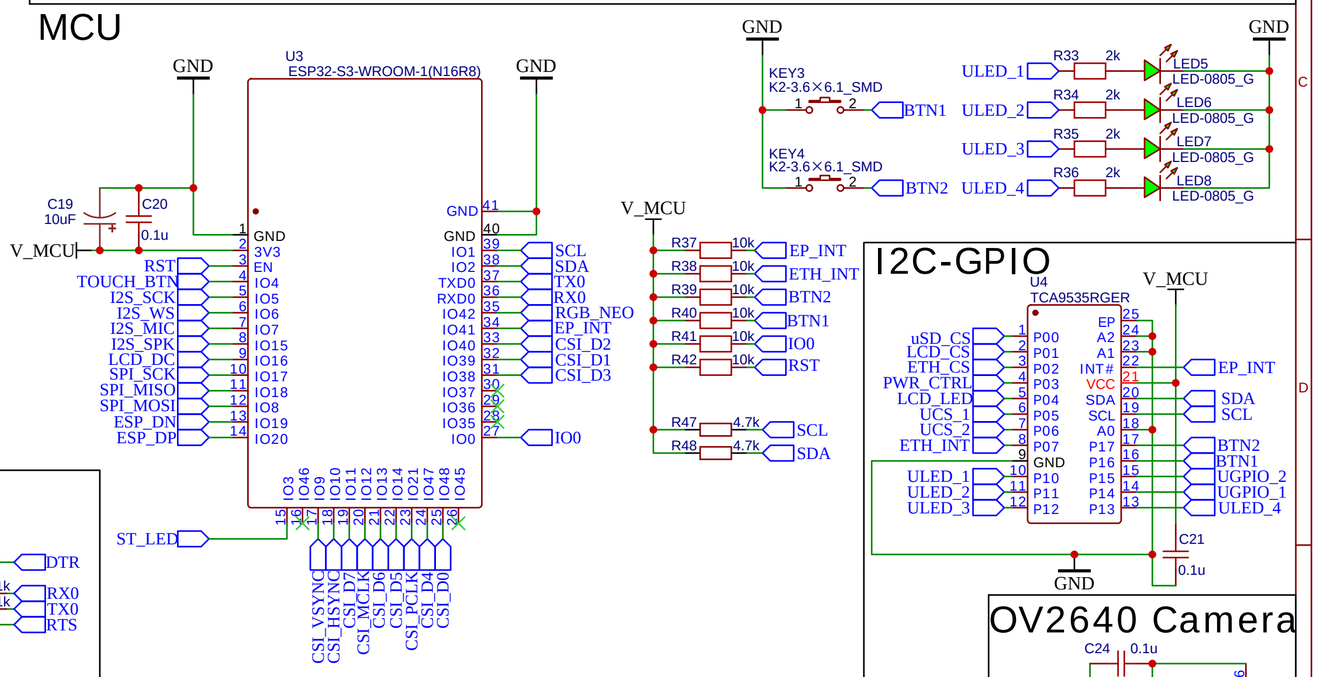


I2C-GPIO


Battery Circuit

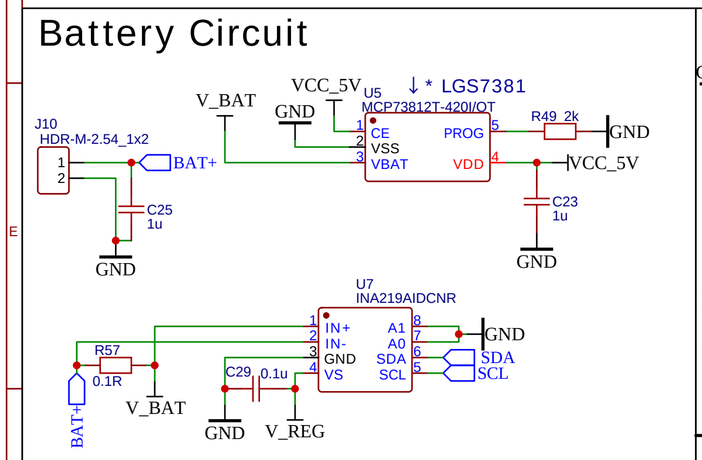


UART CP2102

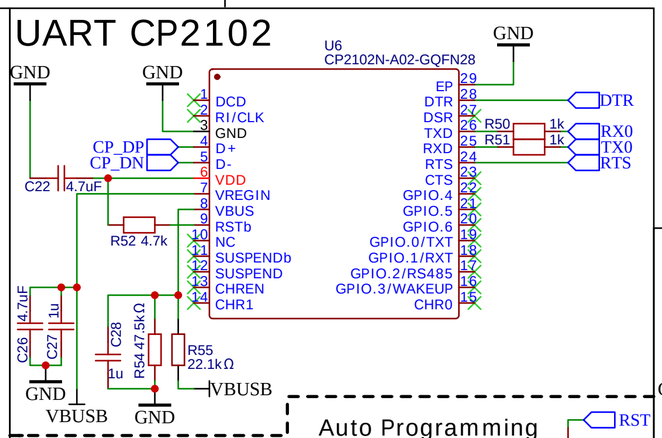


LCD 1.77"

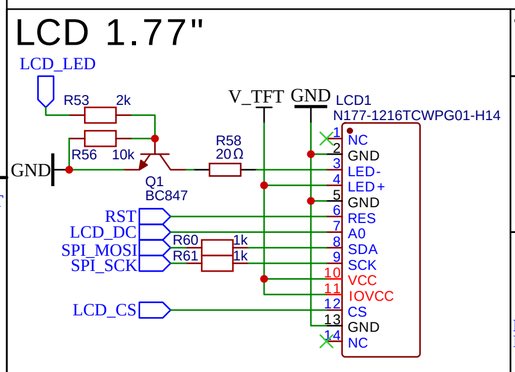


Touch Button




RGB

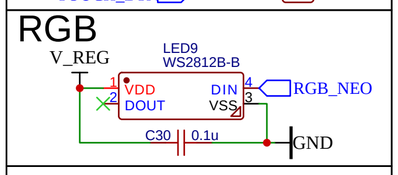


I2S Input(Mic)

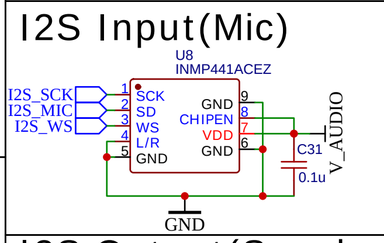


OV2640 Camera

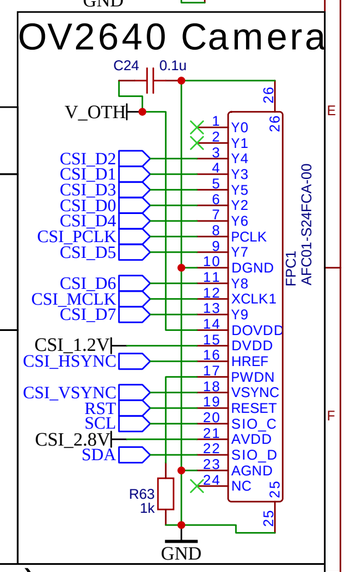


Voltage regulators

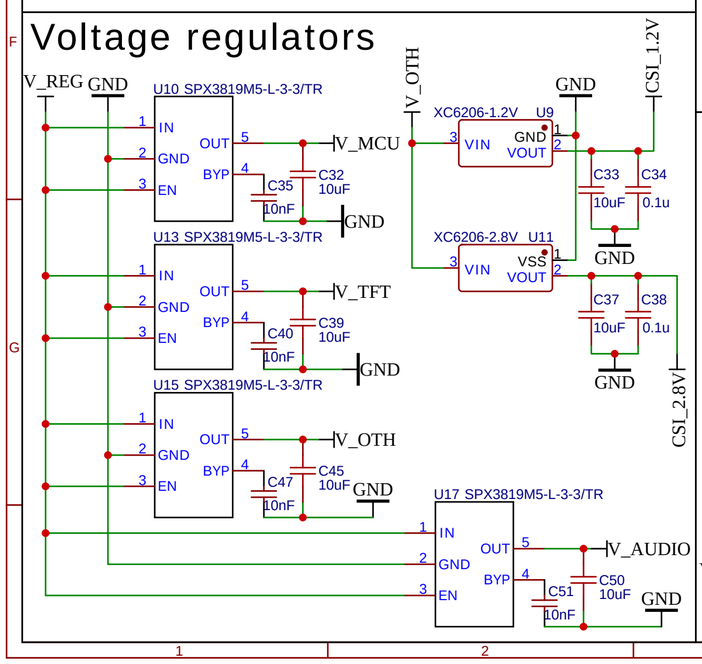


Power switching

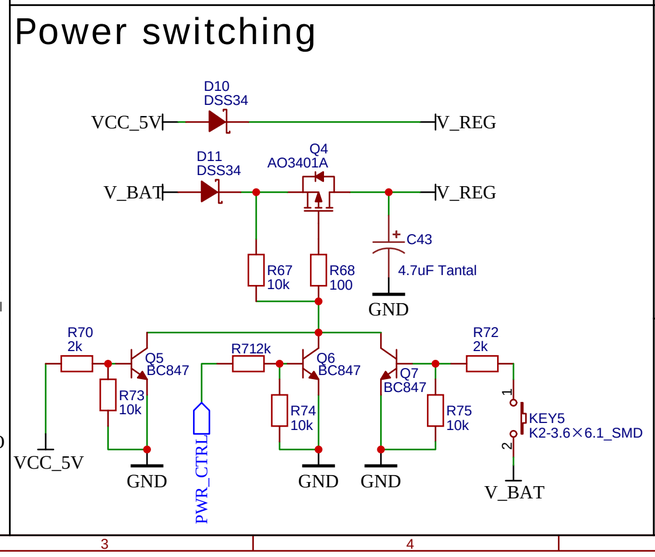


microSD

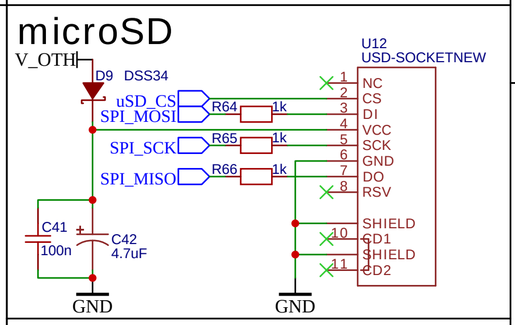

BME280 Sensor

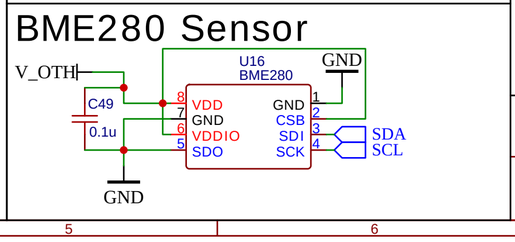

I2S Output(Speaker)

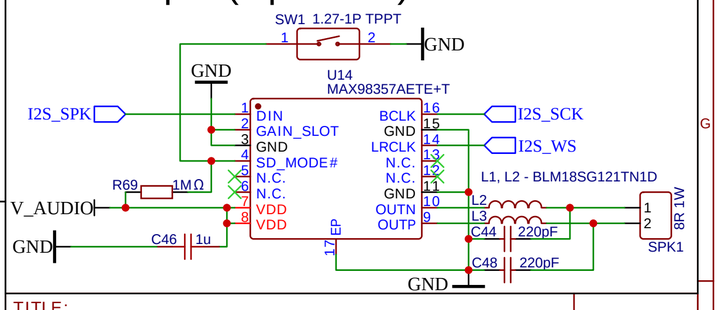

TITLE: Schematic

REV: 1.0

Company: VadymKotsiuba

Sheet: 1/1

Date: 2025-07-22 Drawn By: VadymKotsiuba