

# SQS157ETL

## Product Specifications

XCMG Truck Mounted Crane Co., Ltd.

---

Address: No. 55, Tuolan Mountain Road, Xuzhou Economic  
Development Zone, Jiangsu Province Postcode: 221004

## 1、The main technical parameters

### (1)、Product performance parameters

The following table gives the performance parameters of GSQS157TL truck mounted crane.

|                               |      |                   |
|-------------------------------|------|-------------------|
| Name on boom<br>Contract name | Unit | SQS157TL-4        |
| Name on factory               |      | SQS157ETL         |
| Maximum Lifting<br>Moment     | kN•m | 157.5             |
| Maximum lifting weight        | kg   | 6350              |
| Maximum hydraulic<br>outreach | m    | 11.00             |
| Maximum lift height           | m    | 13.10             |
| Boom length                   | m    | 3.78~11.24        |
| Amplitude range               | °    | 0~78°             |
| Rotation angle                | °    | 360° all rotation |
| Product Weight                | kg   | 1900              |
| Outrigger span                | m    | 2.28~5.10         |

### (2)、Hydraulic system parameters

The following table gives the hydraulic system parameters of GSQS157TL truck-mounted crane.

| parameter item        | Unit  | Parameters |
|-----------------------|-------|------------|
| System rated flow     | L/min | 63         |
| Rated work stress     | MPa   | 23         |
| Recommended power     | kW    | 30         |
| Working temperature   | °C    | -25℃—+40℃  |
| Hydraulic tank volume | L     | 90         |

## Crane Highlights

1. The boom section adopts a heptagonal weld, which has good neutrality, high bending resistance of the section and stronger lifting capacity.
2. Throttle linkage control mode after getting off the vehicle, separate front outrigger valve, convenient outrigger control.
3. Lightweight design of the whole machine.
4. The automatic hook retracting device can save the preparation time before and after the operation to the greatest extent, ensure that the customer's vehicle can enter the drivable state in the shortest time, and prevent damage accidents to the lifting device caused by the swing of the hook, improving


driving safety.

5. Over-coil protection device. If the hook is over-coiled due to negligence or unfamiliarity with the lifting operation principle, the over-coil alarm device will alarm in time to remind the operator to stop retracting the hook to prevent personal and property damage caused by wire rope breakage. Safety.

6. Standard work light to facilitate night work.





7. The standard L-HM (CY) XCMG special wide-temperature hydraulic oil can be used in winter and summer.

2、Overall Dimensions

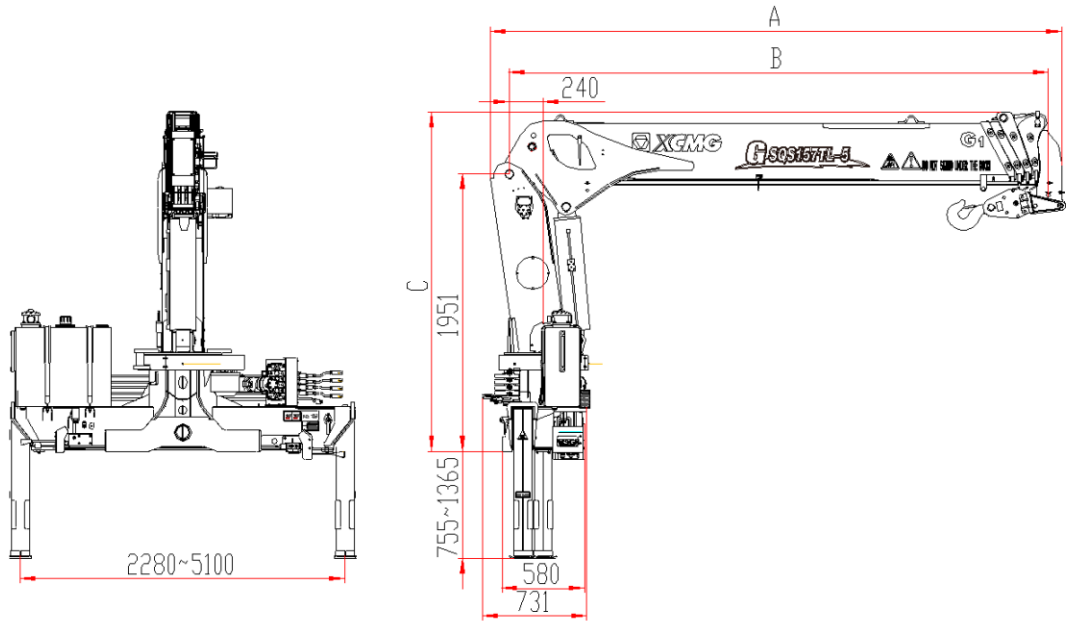

| 序号 | SQS157TL-3 | SQS157TL-4 | SQS157TL-5 | SQS157TL-6 |
|----|------------|------------|------------|------------|
| A  | 3950       | 4015       | 4126       | 4281       |
| B  | 3720~8700  | 3785~11240 | 3800~13560 | 3860~15960 |
| C  | 2340       | 2360       | 2360       | 2385       |

### 3、Working Radius

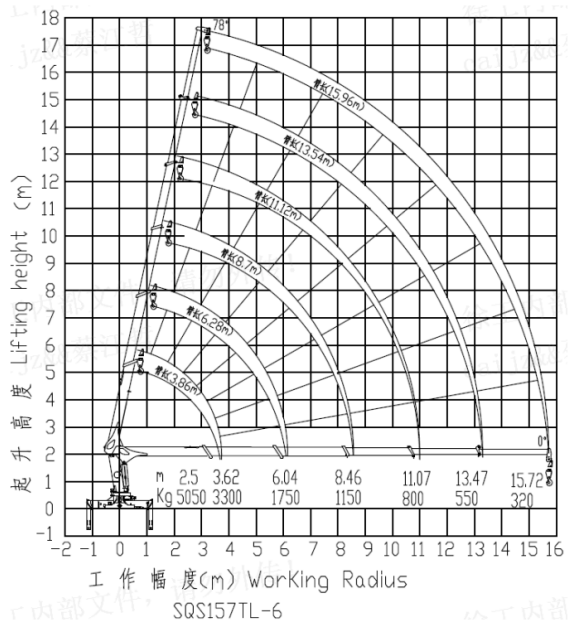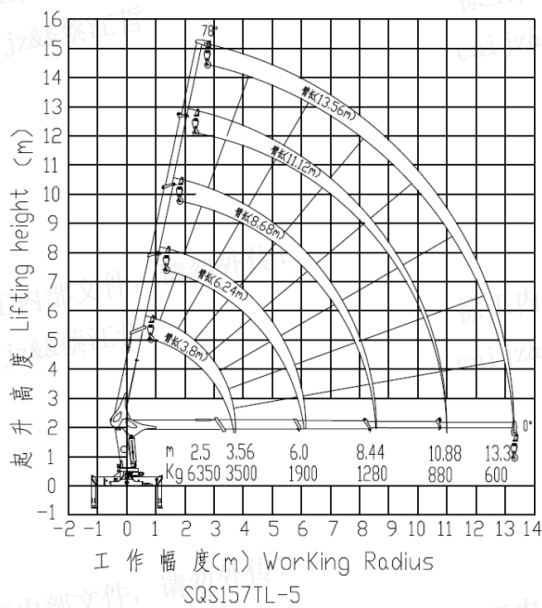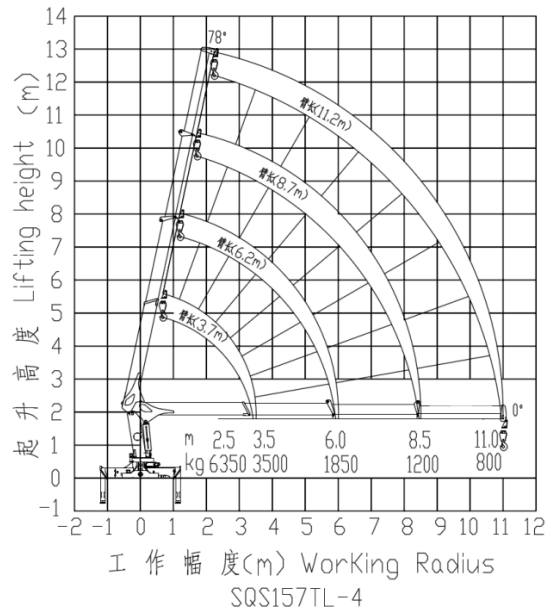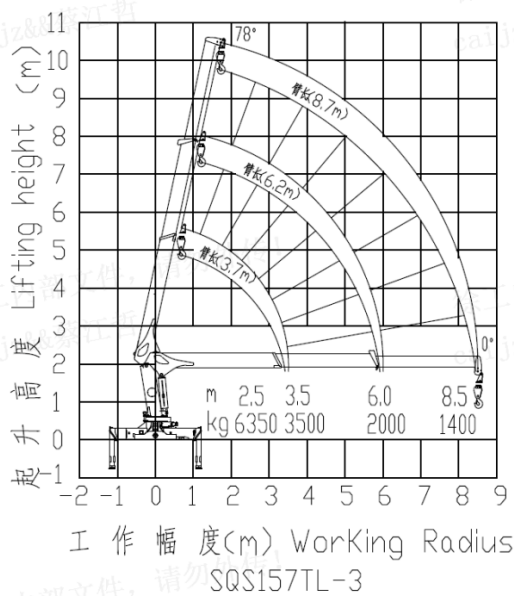

| 型号         | 工作幅度 |      |            |      |      |      |      |      |            |      |            |     |             |     |             |     |     |             |
|------------|------|------|------------|------|------|------|------|------|------------|------|------------|-----|-------------|-----|-------------|-----|-----|-------------|
|            | 2.5  | 3    | 3.5        | 4    | 4.5  | 5    | 5.5  | 6    | 7          | 8    | 9          |     |             |     |             |     |     |             |
| SQS157TL-3 | 6350 | 4100 | 3500       |      |      |      |      |      |            |      |            |     |             |     |             |     |     |             |
|            | 4100 | 4100 | 3500       | 3250 | 2850 | 2500 | 2300 | 2000 |            |      |            |     |             |     |             |     |     |             |
|            |      |      | 3200       | 3100 | 2800 | 2400 | 2200 | 1900 | 1650       | 1450 | 1350(8.5)  |     |             |     |             |     |     |             |
|            |      |      |            |      |      |      |      |      |            |      |            |     |             |     |             |     |     |             |
| 型号         | 工作幅度 |      |            |      |      |      |      |      |            |      |            |     |             |     |             |     |     |             |
|            | 2.5  | 3    | 3.5        | 4    | 4.5  | 5    | 5.5  | 6    | 7          | 8    | 9          | 10  | 11          |     |             |     |     |             |
| SQS157TL-4 | 6350 | 4050 | 3500       |      |      |      |      |      |            |      |            |     |             |     |             |     |     |             |
|            | 4050 | 4050 | 3350       | 2950 | 2600 | 2300 | 2000 | 1850 |            |      |            |     |             |     |             |     |     |             |
|            | 3050 | 3050 | 3050       | 2750 | 2480 | 2200 | 1920 | 1700 | 1450       | 1360 | 1200(8.5)  |     |             |     |             |     |     |             |
|            | 2050 | 2050 | 2000       | 2000 | 1950 | 1860 | 1660 | 1500 | 1260       | 1180 | 1000       | 880 | 800         |     |             |     |     |             |
|            |      |      |            |      |      |      |      |      |            |      |            |     |             |     |             |     |     |             |
| 型号         | 工作幅度 |      |            |      |      |      |      |      |            |      |            |     |             |     |             |     |     |             |
|            | 2.5  | 3    | 3.5        | 4    | 4.5  | 5    | 5.5  | 6    | 7          | 8    | 9          | 10  | 11          | 12  | 13          |     |     |             |
| SQS157TL-5 | 6350 | 4050 | 500 (3.56) |      |      |      |      |      |            |      |            |     |             |     |             |     |     |             |
|            | 4050 | 4050 | 3350       | 2950 | 2650 | 2400 | 2000 | 1900 |            |      |            |     |             |     |             |     |     |             |
|            | 3050 | 3050 | 3050       | 2750 | 2480 | 2150 | 1920 | 1700 | 1500       | 1360 | 1280(8.44) |     |             |     |             |     |     |             |
|            |      |      | 1950       | 1950 | 1900 | 1850 | 1600 | 1500 | 1250       | 1200 | 1050       | 940 | 800 (10.88) |     |             |     |     |             |
|            |      |      |            | 1400 | 1400 | 1350 | 1350 | 1300 | 1100       | 1000 | 900        | 830 | 750         | 680 | 600 (13.3)  |     |     |             |
|            |      |      |            |      |      |      |      |      |            |      |            |     |             |     |             |     |     |             |
| 型号         | 工作幅度 |      |            |      |      |      |      |      |            |      |            |     |             |     |             |     |     |             |
|            | 2.5  | 3    | 3.5        | 4    | 4.5  | 5    | 5.5  | 6    | 7          | 8    | 9          | 10  | 11          | 12  | 13          | 14  | 15  | 15.5        |
| SQS157TL-6 | 6350 | 4050 | 350 (3.87) |      |      |      |      |      |            |      |            |     |             |     |             |     |     |             |
|            | 4050 | 4050 | 3250       | 2850 | 2550 | 2200 | 1920 | 1800 | 1750(6.27) |      |            |     |             |     |             |     |     |             |
|            | 3050 | 3050 | 3050       | 2650 | 2400 | 2150 | 1800 | 1600 | 1400       | 1300 | 1150(8.67) |     |             |     |             |     |     |             |
|            |      |      | 1850       | 1850 | 1750 | 1700 | 1600 | 1400 | 1250       | 1150 | 1000       | 900 | 800 (11.07) |     |             |     |     |             |
|            |      |      |            | 1300 | 1300 | 1250 | 1250 | 1100 | 1000       | 920  | 850        | 700 | 650         | 600 | 550 (13.47) |     |     |             |
|            |      |      |            |      |      |      |      |      |            |      |            |     |             | 500 | 460         | 420 | 380 | 320 (15.72) |

因技术设计的不断进步，我们无法将产品变更有效的通知到阁下，敬请谅解



## UNITED HEAVY EQUIPMENT & EARTH MOVERS PVT. LTD.

VOITH Complex | Ananda Nagar, Dhumbrahi, Nepal  
 Tel.: +977 01 4542901-05, Cell : +977 98512 17690  
 Fax : +977 01 4008813, P.O. Box: 233/2640  
 Email: info@uheem.com.np, Web: www.uheem.com.np