


## XCMG Truck mounted crane

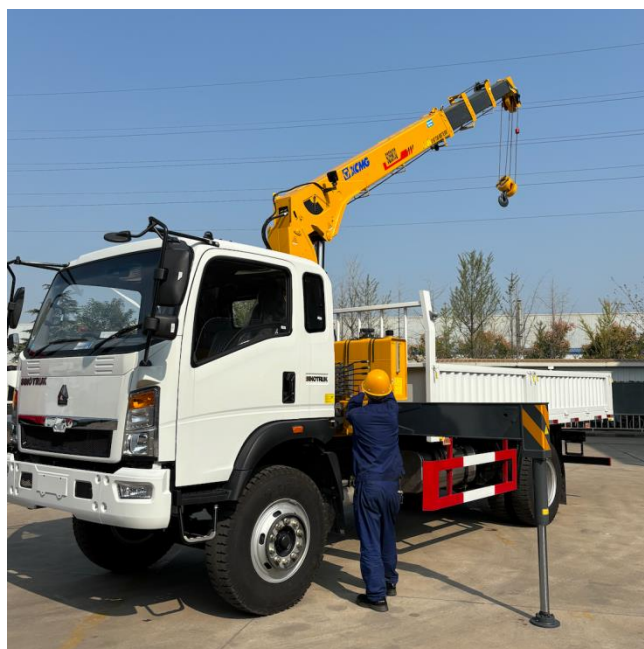


### Technical Parameters

| Description                |                               | Parameter                                                                        |
|----------------------------|-------------------------------|----------------------------------------------------------------------------------|
| Brand                      |                               | XCMG                                                                             |
| Model                      |                               | SQS125TL-4                                                                       |
| Truck Mounted Crane (Boom) |                               |                                                                                  |
| Capacity                   | Max. Lifting moment           | 12.625 T.M                                                                       |
|                            | Max. Lifting capacity         | 5050 kg at 2.5 m                                                                 |
|                            | Max. Working radius           | 11m                                                                              |
|                            | Max. Lifting height           | 13.1m                                                                            |
| Boom                       | type/section                  | Hexagon / 4 section boom with single cylinder                                    |
|                            | Boom length                   | Min. 3.75 m ~ Max.11.24 m                                                        |
|                            | Boom Extension speed          | 7.49m/9.6sec                                                                     |
|                            | Boom moving up and down speed | 0-78/8.9°/sec                                                                    |
|                            | Wire rope                     | 18X7+FC Ø 10mm x68m                                                              |
| Slewing                    | Hook speed                    | 57m/min (4th layer / 4 fall lines)                                               |
|                            | Turning angle                 | Consecutively turn 360°                                                          |
|                            | Turning speed                 | 2.5 rpm                                                                          |
|                            | Slewing gear type             | Hyd. motor driven, planetary gear speed reduction provided with mechanical brake |
| Outrigger                  | type                          | Hydraulically horizontal and vertical outrigger                                  |
|                            | Extended width                | 5.1m                                                                             |


**XCMG, the leading boom truck manufacturer with 60% market share in China, provides reliable and cost-effective lifting and transport solutions.**

|                             |                 |                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hydraulic system            | Rated pressure  | 22MPa                                                                                                                                                                                                                                                                                                                                                                                                  |
|                             | Rated flow rate | 63 L/min                                                                                                                                                                                                                                                                                                                                                                                               |
| Hydraulic oil tank capacity |                 | 90L                                                                                                                                                                                                                                                                                                                                                                                                    |
| Working environment         |                 | -25℃ -+40℃                                                                                                                                                                                                                                                                                                                                                                                             |
| Crane dead weight           |                 | 1850 kg                                                                                                                                                                                                                                                                                                                                                                                                |
| Operate position            |                 | Ground control on both sides                                                                                                                                                                                                                                                                                                                                                                           |
| Standard safety devices     |                 | <ol style="list-style-type: none"> <li>1. Pressure relief valve for hydraulic circuit</li> <li>2. Counter balance valves for raise and telescope cylinder</li> <li>3. Pilot check valves for vertical outrigger cylinder</li> <li>4. Pressure gauge / Boom angle indicator</li> <li>5. Hook safety latch / Alarm buzzer</li> <li>6. Over-winding device</li> <li>7. Hook automatically lock</li> </ol> |
| option                      |                 | <ol style="list-style-type: none"> <li>1. Overload prevention system</li> <li>2. Oil Cooler</li> </ol>                                                                                                                                                                                                                                                                                                 |

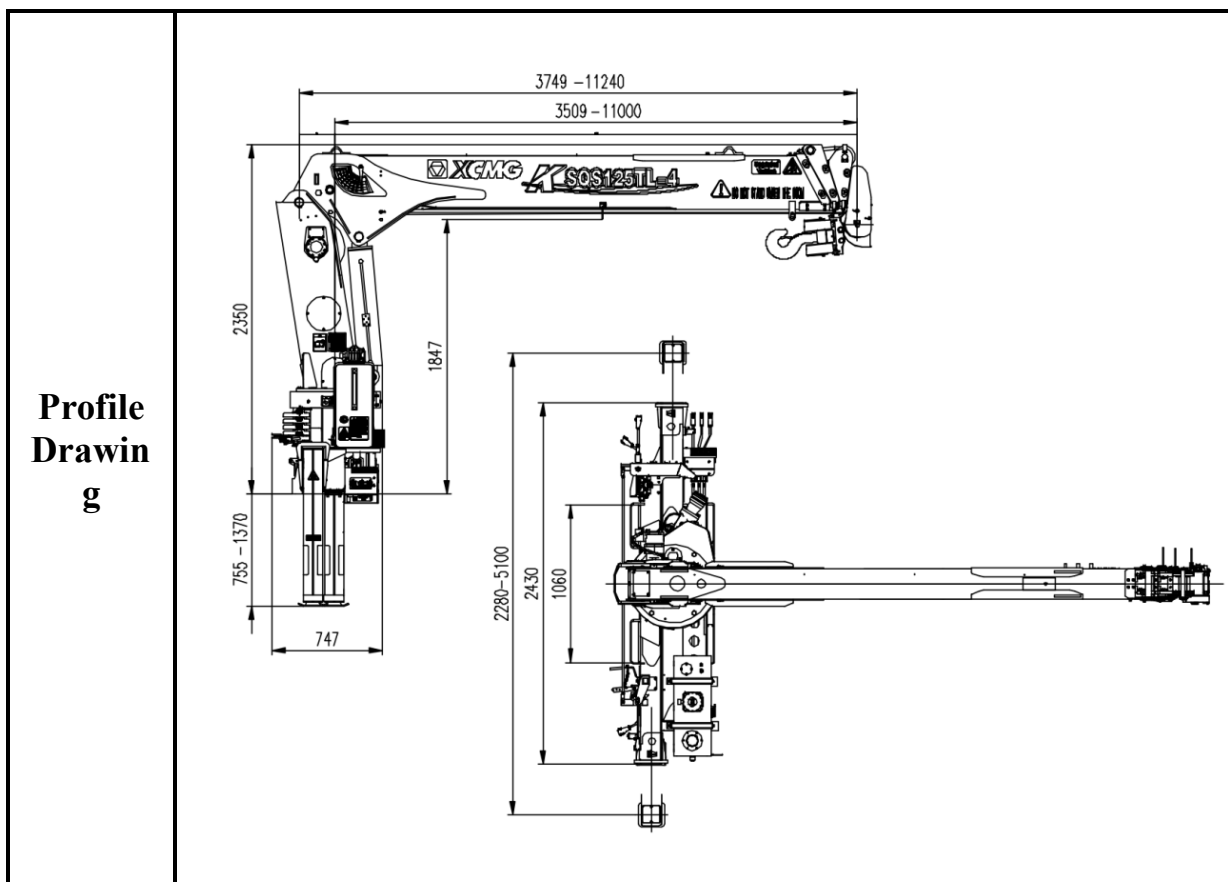

**XCMG, the leading boom truck manufacturer with 60% market share in China, provides reliable and cost-effective lifting and transport solutions.**

**Loading  
Diagram  
m**

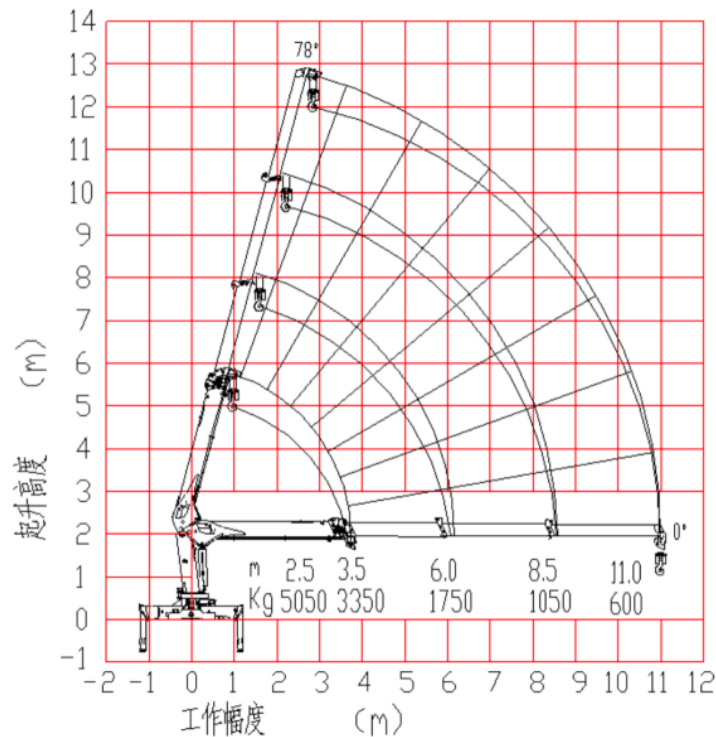

**Rated Loads(kg)**

| length(m) \ range(m) | 2.5  | 3.0  | 3.5  | 4.0  | 4.5  | 5.0  | 5.5  | 6.0  | 6.5  | 7.0  | 7.5  | 8.0  | 8.5  | 9.0 | 9.5 | 10.0 | 10.5 | 11.0 |
|----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|-----|------|------|------|
| 3.75                 | 5050 | 4050 | 3350 |      |      |      |      |      |      |      |      |      |      |     |     |      |      |      |
| 6.25                 | 4050 | 4050 | 3350 | 2950 | 2600 | 2300 | 1950 | 1750 |      |      |      |      |      |     |     |      |      |      |
| 8.74                 | 2500 | 2500 | 2300 | 2100 | 1900 | 1750 | 1650 | 1550 | 1450 | 1400 | 1250 | 1100 | 1050 |     |     |      |      |      |
| 11.24                | 1900 | 1900 | 1700 | 1650 | 1550 | 1450 | 1400 | 1350 | 1300 | 1200 | 1150 | 1100 | 1050 | 950 | 900 | 850  | 800  | 600  |

**Note:**

1. The load capacity are based on the crane strength with the outrigger fully extended on the solid and leveling ground;
2. The load capacity value includes the mass of hook block, slings and other accessories for lifting;
3. Due to constant improvement of product, specifications are subject to change without prior notice.

**XCMG, the leading boom truck manufacturer with 60% market share in China, provides reliable and cost-effective lifting and transport solutions.**



**UNITED HEAVY EQUIPMENT &  
EARTH MOVERS PVT. LTD.**

VOITH Complex | Ananda Nagar, Dhumbarahi, Nepal  
Tel.: +977 01 4542901-05, Cell : +977 98512 17690  
Fax : +977 01 4008813, P.O. Box: 233/2640  
Email: info@uheem.com.np, Web: www.uheem.com.np