On CEM, in B connector get Pin 17 and 18.

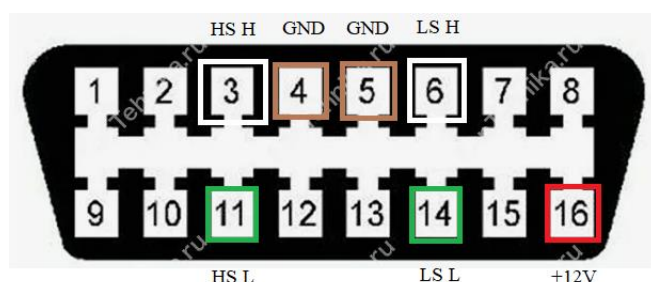   Pin 17 – CAN HighSpeed HIGH (white)

   Pin 18 – CAN HighSpeed LOW (green)

On CEM, in D connector get Pin 3 and 2.

   Pin 3 – CAN LowSpeed HIGH (white)

   Pin 2 – CAN LowSpeed LOW (green)

On OBD2 connector:

Pin 3   – CAN LowSpeed HIGH (white)

Pin 11   – CAN LowSpeed LOW (green)

Pin 6   – CAN HighSpeed HIGH (white)

Pin 14   – CAN HighSpeed LOW (green)

Pin 16   – +12v

Pin 4   – ground

Pin 5   – ground

Preferred to use twisted pair wires.