

CERTIFICADO PATRON DE CND


TEND

NDT Reference Standard Certificate

Tubo patrón número Reference standard #

2U60

Datos del Producto Product Information Ciclo Product Cliente Client Diametro [mm] 244.5 0 Diameter Espesor [mm]
Wall Thickness Tratamiento Termico Colada Heat NO 11,05 0 **Heat Treatment** Trazabilidad Expediente Manufacturing Order 0 Traceability

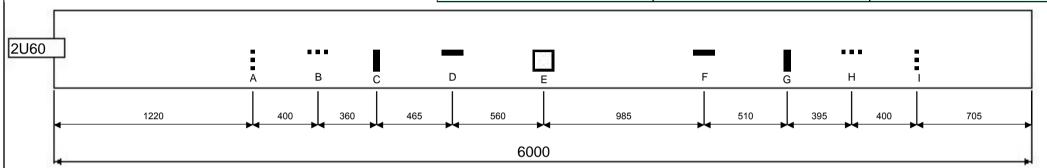

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
Α	Transversal Interno Transverse ID	1,00	13	±15	1,588	1,174	1,381	38,10	38,10	12,500	12,500	1,00	Sebastian Monteros	08/07/04
В	Longitudinal Interno Longitudinal ID	1,00	13	±15	1,588	1,174	1,381	38,10	38,10	12,500	12,500	1,00	Sebastian Monteros	08/07/04
С	Transversal Externo Transverse OD	1,00	13	±15	1,588	1,174	1,381	38,10	38,10	12,500	12,500	1,00	Sebastian Monteros	08/07/04
D	Longitudinal Externo longitudinal OD	1,00	13	±15	1,588	1,174	1,381	38,10	38,10	12,500	12,500	1,00	Sebastian Monteros	08/07/04
Е	Reduccion de Espesor Externo	50,00	15	±15	1,843	1,362	1,602	90,00	90,00	-	-	50,00	Sebastian Monteros	08/07/04
F	Longitudinal Externo longitudinal OD	1,00	5	±15	0,635	0,470	0,553	38,10	38,10	5,000	5,000	1,00	Sebastian Monteros	08/07/04
G	Transversal Externo Transverse OD	1,00	5	±15	0,635	0,470	0,553	38,10	38,10	5,000	5,000	1,00	Sebastian Monteros	08/07/04
Н	Longitudinal Interno Longitudinal ID	1,00	5	±15	0,635	0,470	0,553	38,10	38,10	5,000	5,000	1,00	Sebastian Monteros	08/07/04

Notas:

- 1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.
- 2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

Notes:

1.-All dimensions in milimeters unless stated.

1/2

- 2.-Minimum notch nominal depth 0.3 mm.
- CERTIFIED WITH PLASTIC REPLICA NO

OT-PMANT

Fecha Date 08/07/2004 11:57:06 a.m. Hoja Page Documento Vigencia TAND-001-05 17/04/2006



CERTIFICADO PATRON DE CND

TEND

NDT Reference Standard Certificate

Tubo patrón número Reference standard #

2U60

Datos del Producto Product Information										
Diametro [mm] Diameter	244,5	Cliente Client		Ciclo Product	0					
Espesor [mm] Wall Thickness	11,05	Tratamiento Termico Heat Treatment	NO	Colada _{Heat}	0					
Trazabilidad Traceability	0			Expediente Manufacturing Order						

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Nominal [%]				Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
	Transversal Interno Transverse ID	1,00	5	±15	0,635	0,470	0,553	38,10	38,10	5,000	5,000	1,00	Sebastian Monteros	08/07/04

Instrumentos de Medicion Utilizados:

Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

Notes:

1.-All dimensions in milimeters unless stated.

2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO