

CERTIFICADO PATRON DE CND


TEND

NDT Reference Standard Certificate



1c564

Datos del Producto Product Information							
Diametro [mm] Diameter	80,5	Cliente Client	Ciclo Product	27207			
Espesor [mm] Wall Thickness	9,17	Tratamiento Termico Heat Treatment	Colada _{Heat}	0			
Trazabilidad Traceability	0		Expediente Manufacturing Order				

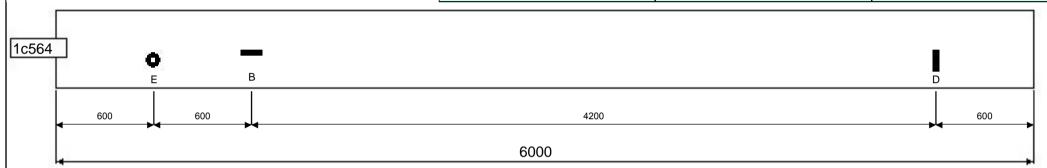

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%]	Tolerancia [%] Tolerance		Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm]	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
						- 1	· ·	Max Length	. 3					
В	Longitudinal Externo longitudinal OD	1,00	5	±15	0,527	0,390	0,459	25,40	25,40	5,000	5,000	1,00	Sebastian Monteros	03/11/04
D	Transversal Externo Transverse OD	1,00	5	±15	0,527	0,390	0,459	25,40	25,40	5,000	5,000	1,00	Sebastian Monteros	03/11/04
Е	Agujero Pasante Drilled hole	1,60	-	-	-	-	-	-	-	-	-	1,60	Sebastian Monteros	03/11/04

Instrumentos de Medicion Utilizados:

Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

Notes:

1.-All dimensions in milimeters unless stated.

1/2

2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO